



Vipac Engineers and Scientists Limited

Level 2, 146 Leichhardt Street, Spring Hill, QLD 4000, Australia

PO Box 47, Spring Hill, Qld, 4000 Australia

t. +61 7 3377 0400 | f. +61 7 3377 0499 | e. brisbane@vipac.com.au

w. www.vipac.com.au | A.B.N. 33 005 453 627 | A.C.N. 005 453 627

Vipac Engineers & Scientists

Maroochydore Spotlight Property 2 Pty Ltd

53-91 Dalton Drive East, Maroochydore

Acoustic Report



70Q-17-0188-TRP-542381-1

23 November 2017

**PLANS AND DOCUMENTS
referred to in the PDA
DEVELOPMENT APPROVAL**

Approval no: DEV2017/893

Date: 26 February 2018



Report Title: Acoustic Report Job Title: 53-91 Dalton Drive East, Maroochydore														
DOCUMENT NO: 70Q-17-0188-TRP-542381-1 PREPARED FOR: Maroochydore Spotlight Property 2 Pty Ltd 53-91 Dalton Drive East, Maroochydore Australia CONTACT: Ben Jones Tel: 0437 392 559 Fax:	REPORT CODE: TRP PREPARED BY: Vipac Engineers and Scientists Limited Level 2, 146 Leichhardt Street, Spring Hill, QLD 4000, Australia Tel: +61 7 3377 0400 Fax: +61 7 3377 0499													
PREPARED BY: Author:  Arnold Mafu Project Engineer Date: 23 Nov 2017														
REVIEWED BY: Reviewer:  Jackson Yu Senior Acoustic Consultant, Team Leader Date: 23 Nov 2017														
AUTHORISED BY:  Jackson Yu Senior Acoustic Consultant, Team Leader Date: 23 Nov 2017														
REVISION HISTORY <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; width: 25%;">Revision No.</th> <th style="text-align: left; width: 40%;">Date Issued</th> <th style="text-align: left; width: 35%;">Reason/Comments</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>13/11/2017</td> <td>Initial Issue</td> </tr> <tr> <td>1</td> <td>23/11/2017</td> <td>Client Requested</td> </tr> <tr> <td>2</td> <td></td> <td></td> </tr> </tbody> </table>			Revision No.	Date Issued	Reason/Comments	0	13/11/2017	Initial Issue	1	23/11/2017	Client Requested	2		
Revision No.	Date Issued	Reason/Comments												
0	13/11/2017	Initial Issue												
1	23/11/2017	Client Requested												
2														
DISTRIBUTION <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; width: 30%;">Copy No. <u>2</u></th> <th style="text-align: left; width: 40%;">Location</th> <th style="text-align: left; width: 30%;"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Project</td> <td></td> </tr> <tr> <td>2</td> <td>Client (PDF Format)</td> <td>Uncontrolled Copy</td> </tr> <tr> <td>3</td> <td></td> <td></td> </tr> </tbody> </table>			Copy No. <u>2</u>	Location		1	Project		2	Client (PDF Format)	Uncontrolled Copy	3		
Copy No. <u>2</u>	Location													
1	Project													
2	Client (PDF Format)	Uncontrolled Copy												
3														
KEYWORDS:														

NOTE: This is a controlled document within the document control system. If revised, it must be marked SUPERSEDED and returned to the Vipac QA Representative. This document contains commercial, conceptual and engineering information that is proprietary to Vipac Engineers & Scientists Ltd. We specifically state that inclusion of this information does not grant the Client any license to use the information without Vipac's written permission. We further require that the information not be divulged to a third party without our written consent

EXECUTIVE SUMMARY

Vipac Engineers & Scientists Ltd (Vipac) has completed a noise impact assessment for the proposed large format retail development including a Spotlight and other tenancies, to be located on Lot 1 on SP202103, 53-91 Dalton Drive East, Maroochydore. The impacts of noise emissions from the development on neighbouring Noise Sensitive Receivers have been considered and assessed according to Economic Development Queensland (EDQ), State Planning Policy 5/10 (SPP 5/10) and the Department of Environment and Heritage Protection (EHP) noise criteria.

Noise sources associated with the proposed development that may potentially impact on NSRs include:

- Car parking;
- Refuse collection,
- Truck deliveries; and
- Mechanical plant.

The following noise mitigation is proposed by Vipac for noise levels at NSRs to comply with applicable noise limits:

- A 2m high noise barrier is required with no gaps adjacent to the residential townhouses along the eastern site boundary as shown in Figure 5-2;

Noise barriers should be constructed in accordance with Chapter 7 (Integrated Noise Barrier Design) of the Transport Noise Management Code of Practice: Volume 1 (Road Traffic Noise), Department of Transport and Main Roads, 2013. Barriers should have no gaps between palings, or between palings and posts and ground. A minimum surface density of 12.5kg/m² should be used;

- Selection of the total mechanical plant system (including rooftop plant, plant rooms, exhaust and inlet vents and any other plant) to have a total sound power level of 83 dB(A). Higher noise levels may be permitted with additional noise mitigation measures such as acoustic screens or enclosures or by locating plant away from nearby residences;
- Truck deliveries should not occur (and forklifts should not operate) between the hours of 10pm and 7am; and
- Refuse collection should not occur between the hours of 10pm and 7am.

In conclusion, noise impacts associated with the proposed development can be controlled to an acceptable level by implementing the recommendations in this report.

TABLE OF CONTENTS

1	INTRODUCTION	5
2	PROPOSED DEVELOPMENT AND SURROUNDING AREA	5
3	EXISTING NOISE LEVELS	6
4	NOISE POLICY	7
5	NOISE MODELLING METHODOLOGY	7
5.1	Car Park Noise	8
5.2	Truck Deliveries Noise	8
5.3	Refuse Collection Noise	8
5.4	Mechanical Plant Noise	8
5.5	Noise Source Locations	9
5.6	Acoustic Fence	10
6	NOISE MODELLING RESULTS	11
6.1	Car Park Noise Predictions	11
6.2	Truck Deliveries Noise Predictions	11
6.3	Refuse Collection Noise Predictions	11
6.4	Mechanical Plant Noise Predictions	12
7	RECOMMENDATIONS	12
8	CONCLUSIONS	13
APPENDIX A	NOISE MEASUREMENT DETAILS	14
A.1	Weather Data	16
APPENDIX B	NOISE POLICY	17
B.1	Applicable Noise Policies	17
B.2	Mechanical Plant Associated With the Proposed Development	17
B.2.1	EPA 1994	17
B.2.2	EPP 2008	17
B.3	Refuse Collection, Truck Deliveries and Car Parking	18
B.4	Noise Limits	18
APPENDIX C	BUILDING PLANS	19
APPENDIX D	EXAMPLE NOISE CALCULATION	33

1 INTRODUCTION

Vipac Engineers & Scientists Ltd (Vipac) was commissioned by Maroochydhore Spotlight Property 2 Pty Ltd to provide a noise impact assessment for the proposed large format retail development including a Spotlight and other tenancies, to be located on Lot 1 on SP202103, 53-91 Dalton Drive East, Maroochydhore.

The purpose of this assessment is to determine the impacts of any potential noise emissions from the development onto neighbouring noise sensitive receivers (NSRs).

Noise impacts have been assessed in accordance with Economic Development Queensland (EDQ), State Planning Policy 5/10 (SPP 5/10) and the Department of Environment and Heritage Protection (EHP) noise criteria.

2 PROPOSED DEVELOPMENT AND SURROUNDING AREA

The proposed development is to consist of a Spotlight and other tenancies located in an area zoned as Principal Centre (CBD) Zone under the Maroochydhore City Centre Priority Development Area Development Scheme.

The following information about the surrounding area was observed on site and presented in Figure 2-1:

- North: Vacant land and golf course;
- East: Two storey townhouses on Dalton Drive and golf course;
- South: Dalton Drive, and further south two storey townhouses on Dalton Drive; and
- West: Dalton Drive, and large commercial and retail spaces (Bunnings, Officeworks etc.).

The nearest NSRs are the two storey townhouses immediately east of the development at 47 to 49 Dalton Drive and the townhouses south of the site at 54 Dalton Drive.

Noise sources associated with the proposed development that may potentially impact on NSRs include:

- Car parking;
- Refuse collection,
- Truck deliveries; and
- Mechanical plant.



Figure 2-1: Aerial Photograph of the Site, NSRs and Noise Monitoring Location [Google Earth 2017]

3 EXISTING NOISE LEVELS

Unattended noise logging was conducted to obtain background noise levels for the purposes of calculating noise limits.

An environmental noise logger was used to measure the existing noise levels on site. The location of the noise logger is shown in Figure 2-1. Noise monitoring was conducted between 7th of November, 2014 and the 18th of November 2014 on site. A Bruel & Kjaer 4231 calibrator was used to calibrate the instruments, with less than 0.5dB drift before and after the measurement. The instrumentation, measurement details and measurement results are presented in Appendix A.

Background noise levels used to determine noise limits are presented in Table 3-1.

Table 3-1: Measured Background Noise Levels Used to Calculate Noise Limits

Noise Descriptor	Day (7am to 6pm)	Evening (6pm to 10 pm)	Night (10pm to 7am)
LA90	45	50	46

4 NOISE POLICY

The major noise sources and the applicable noise criteria are summarised in Table 4-1.

Table 4-1: Noise Sources and Applicable Noise Policies

Noise Source	Applicable Noise Criteria
Mechanical plant noise	Environmental Protection Act 1994 (Current as at 3 July 2017), Division 3, Default Noise Standards, Section 440U Air Conditioning and Section 440V Refrigeration Equipment (EPA 1994) Economic Development Queensland's (EDQ's) PDA Guideline no. 14, "Environmental values and sustainable resource use" State Planning Policy 5/10 Guideline, "Air Noise and Hazardous Materials" Environmental Protection (Noise) Policy 2008 - Acoustic Quality Objectives
Truck deliveries, refuse collection, car parking	Economic Development Queensland's (EDQ's) PDA Guideline no. 14, "Environmental values and sustainable resource use" State Planning Policy 5/10 Guideline, "Air Noise and Hazardous Materials" Environmental Protection (Noise) Policy 2008 - Acoustic Quality Objectives

Based on the noise criteria presented in Table 4-1 and the noise monitoring results presented in Section 3, the applicable noise limits for all noise sources are presented in Table 4-2. The noise limits have been derived from the strictest noise limits in the applicable noise policies. A full discussion of all applicable noise criteria is presented in Appendix B.

Table 4-2: All Applicable Noise Limits

Noise Source	Noise Criteria	Noise Limit	Period	Where
Air-conditioning and mechanical plant	EPP 2008 Acoustic Quality Objectives	50 dB(A) L_{Aeq}	Day (7am to 6pm)	At the external façade of neighbouring residences
		50 dB(A) L_{Aeq}	Evening (6m to 10pm)	At the external façade of neighbouring residences
		35 dB(A) L_{Aeq}^1	Night (10pm to 7am)	At the external façade of neighbouring residences
Truck deliveries, refuse collection, car parking	EPP 2008 Acoustic Quality Objectives	65 dB(A) L_{A1}	Day (7am to 10pm)	At the external façade of neighbouring residences
		65 dB(A) L_{A1}	Evening (6m to 10pm)	At the external façade of neighbouring residences
		45 dB(A) L_{A1}^1	Night (10pm to 7am)	At the external façade of neighbouring residences

¹ Noise limit includes a 5 dB(A) factor for attenuation of noise from outdoors to indoors, assuming partially open windows

5 NOISE MODELLING METHODOLOGY

Noise calculations were carried out using SoundPLAN noise modelling software. A 3D computational model was created based on the data in Table 5-1 and the drawings in Appendix C.

Table 5-1: Data and Assumptions Used in Noise Modelling

Parameter	Data
Neighbouring residence locations	Site inspection and Google Earth geographical software
Neighbouring residence receiver heights	1.8m above and 4.6m above natural terrain as obtained from elevation data for ground floor and first floor receivers respectively
Calculation method	International standard ISO 9613 2:1996, "Acoustics - Attenuation of sound during propagation outdoors - Part 2: General method of calculation" (ISO 9613) as implemented in SoundPLAN software. An example noise calculation is included in Appendix D
Terrain Data	2014.11.11-From Civil N-B9083.30 - X - SURVEY.dwg, received from Cardno HRP 24/11/2014
Site Layout	A-DA-0102 - PROPOSED MASTERPLAN - STAGE 01.dwg, received from The Buchan Group 10/11/2017

5.1 CAR PARK NOISE

Potential car park noise emissions include:

- Engine starts,
- Car revving; and
- Car door slams.

The highest noise emissions associated with a car park is typically a car door slam. A point noise source was entered in the noise model to represent noise emissions in a representative worst-case location. An L_{Amax} sound power spectra with an overall level of 93 dB(A) was used for the point source. This value has been previously measured by Vipac.

The location of the car park noise source is presented in Figure 5-1.

5.2 TRUCK DELIVERIES NOISE

Delivery trucks will enter and exit from the west entrance of the site off Dalton Drive and deliver to the main receiving dock. The site layout has been designed to allow trucks to reverse into the loading dock (see Figure 5-1).

The highest noise source associated with delivery trucks is the reverse beepers. A truck reverse beeper noise source with a sound power of 104 dB(A) (including a tonal penalty of 5 dB(A)) has been entered into the noise model. Noise sources were also entered in the noise model to represent the noise emissions from truck engine noise. Sound power spectra with an overall level of 94 dB(A) previously measured by Vipac was used for these noise sources.

Forklifts may help transfer the delivered items from the loading bay into the building via the service lift and the roller doors. Noise sources associated with forklifts include forklift engine noise, pallet jack noise, and reverse beepers. Of these, the highest noise source is expected to be forklift reverse beepers. A forklift reverse beeper noise source with a sound power of 104 dB(A) (including a tonal penalty of 5 dB(A)) has been entered into the noise model near the main receiving dock area of the Spotlight building in close proximity to the service lift.

5.3 REFUSE COLLECTION NOISE

Refuse collection was modelled as a bin being lifted by a truck by means of a hydraulic system and then being put down (dropped) on the ground. The sound power levels used for the bin lifting and dropping noise sources were 88 dB(A) for the hydraulic lift system and 108 dB(A) for the bin dropping.

Additionally, a truck engine noise source was incorporated in the noise model to predict truck movements. A sound power level of 94 dB(A) for engine noise has been used for this noise source. Refuse trucks will enter and exit from the west entrance of the site off Dalton Drive to the main receiving dock where the bin area will be located.

Bin lifting and dropping noise sources were located at the bin area at the main loading dock as presented in Figure 5-1.

5.4 MECHANICAL PLANT NOISE

At this stage, mechanical plant specifications are unknown. In order to predict noise impacts, a point source was entered in the noise model on the Spotlight building roof in a representative worst-case location. The purpose was to determine a maximum permitted sound power level that would achieve compliance with the noise criteria.

A sound power spectrum with overall level of 93 dB(A) L_{Aeq} was used. The location of the mechanical plant noise source is presented in Figure 5-1.

5.5 NOISE SOURCE LOCATIONS

Figure 5-1 shows the location of all the noise sources, as entered in the noise model. Note that the mechanical plant noise source is located on the rooftop level.

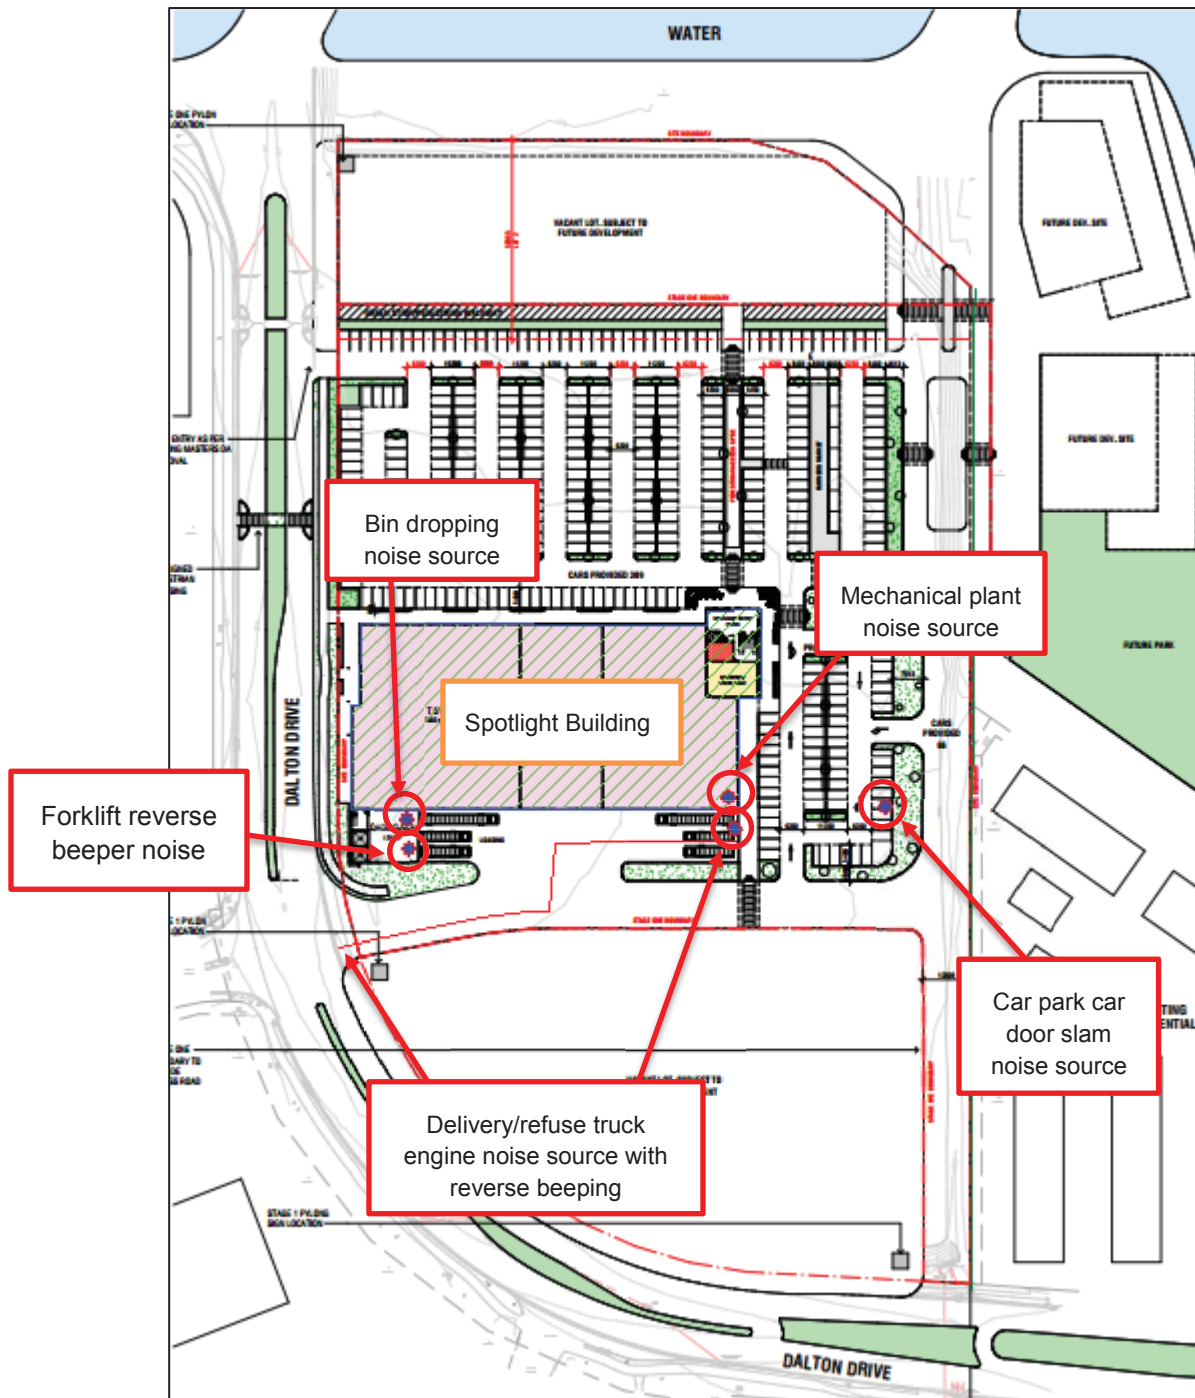


Figure 5-1: Location of the Noise Sources in the SoundPLAN Noise Model

A 2m high noise barrier is required with no gaps adjacent to the residential townhouses along the eastern site boundary, as presented in Figure 5-2. The noise modelling results include the 2m noise barrier.



6 NOISE MODELLING RESULTS

6.1 CAR PARK NOISE PREDICTIONS

Table 6-1 shows the results of the car park noise predictions at the most exposed NSR.

Table 6-1: Car Park Noise Predictions at the Most Exposed NSR with a 2m Acoustic Fence

Noise Source	Predicted Outdoors L _{A1} , in dB(A)	Outdoors L _{A1} noise criteria, in dB(A)			Noise criteria exceedance, in dB(A)		
		Day	Evening	Night	Day	Evening	Night
Car door slam	50	65	65	45	Complies	Complies	5

Car park noise complies with applicable noise limits during the day and evening, and exceeds the applicable noise limits at night.

The car park is not expected to be used by patrons outside the hours of 7am to 10pm, as the store will be closed during this period. The eastern car parks closest to the most exposed NSRs may be utilised by staff of the store, however the staff will not be on site after 10pm, or before 7am.

6.2 TRUCK DELIVERIES NOISE PREDICTIONS

Table 6-2 shows the results of truck deliveries noise and forklift noise predictions at the most exposed NSR.

Table 6-2: Truck Deliveries and Fork Lift Noise Predictions at the Most Exposed NSR with a 2m Acoustic Fence

Noise Source	Predicted Outdoors L _{A1} , in dB(A)	Outdoors L _{A1} noise criteria, in dB(A)			Noise criteria exceedance, in dB(A)		
		Day	Evening	Night	Day	Evening	Night
Truck engine with Reverse Beeper	54	65	65	45	Complies	Complies	9
Forklift Reverse Beeper	47	65	65	45	Complies	Complies	2

Predicted noise levels comply with applicable noise limits during the day and evening, and exceed the applicable noise limits at night. It is recommended that deliveries do not occur (and forklift should not operate) between the hours of 10pm and 7am to comply with the applicable noise limits.

6.3 REFUSE COLLECTION NOISE PREDICTIONS

Table 6-3 shows the results of refuse collection noise predictions at the most exposed NSR.

Table 6-3: Refuse Collection Noise Predictions at the Most Exposed NSR with a 2m Acoustic Fence

Noise Source	Predicted Outdoors L _{A1} , in dB(A)	Outdoors L _{A1} noise criteria, in dB(A)			Noise criteria exceedance, in dB(A)		
		Day	Evening	Night	Day	Evening	Night
Truck Engine	54	65	65	45	Complies	Complies	9
Bin dropping	52	65	65	45	Complies	Complies	7

Predicted noise levels comply with applicable noise limits during the day and evening, and exceed the applicable noise limits at night. It is recommended that refuse collection does not occur between the hours of 10pm and 7am to comply with the applicable noise limits.

6.4 MECHANICAL PLANT NOISE PREDICTIONS

Table 6-4 shows the results of mechanical plant noise predictions at the most exposed NSR.

Table 6-4: Mechanical Plant Noise Predictions at the Most Exposed NSR with a 2m Acoustic Fence

Noise Source	Predicted Outdoors L_{A90} , in dB(A)	Outdoors L_{A90} noise criteria, in dB(A)			Noise criteria exceedance, in dB(A)		
		Day	Evening	Night	Day	Evening	Night
Mechanical Plant	44	50	50	35	Complies	Complies	9

The maximum sound power level for the total mechanical plant system (including rooftop plant, plant rooms, exhaust and inlet vents and any other plant) that results in compliance with the noise criteria is 83 dB(A). Higher levels may be permitted with additional noise treatments such as noise screens, or placing mechanical plant noise sources away from the closest residences.

7 RECOMMENDATIONS

- A 2m high noise barrier is required with no gaps adjacent to the residential townhouses along the eastern site boundary as shown in Figure 5-2;

Noise barriers should be constructed in accordance with Chapter 7 (Integrated Noise Barrier Design) of the Transport Noise Management Code of Practice: Volume 1 (Road Traffic Noise), Department of Transport and Main Roads, 2013. Barriers should have no gaps between palings, or between palings and posts and ground. A minimum surface density of 12.5kg/m² should be used;

- Selection of the total mechanical plant system (including rooftop plant, plant rooms, exhaust and inlet vents and any other plant) to have a total sound power level of 83 dB(A). Higher noise levels may be permitted with additional noise mitigation measures such as acoustic screens or enclosures or by locating plant away from nearby residences;
- Truck deliveries should not occur (and forklifts should not operate) between the hours of 10pm and 7am; and
- Refuse collection should not occur between the hours of 10pm and 7am.

8 CONCLUSIONS

Vipac Engineers & Scientists Ltd (Vipac) has completed a noise impact assessment for the proposed large format retail development including a Spotlight and other tenancies, to be located on Lot 1 on SP202103, 53-91 Dalton Drive East, Maroochydore. The impacts of noise emissions from the development on neighbouring Noise Sensitive Receivers have been considered and assessed according to Economic Development Queensland (EDQ), State Planning Policy 5/10 (SPP 5/10) and the Department of Environment and Heritage Protection (EHP) noise criteria.

A 2m noise adjacent to the residential townhouses along the eastern site boundary will be sufficient to comply with the noise criteria applicable for the development. Additional recommendations are given in this report for noise impacts to reduce noise emissions associated with the development.

In conclusion, noise impacts associated with the proposed development can be controlled to an acceptable level by implementing the recommendations in this report.

Appendix A NOISE MEASUREMENT DETAILS

Table A-1: Instrumentation

Instrument	Serial Number	Lab calibration due (at time of measurement)	Field Calibration
Larson Davis LD-831 Noise logger	831-7	17-Mar-2016	<0.5dB deviation between start and end of measurement
Ono Sokki SC2120 Calibrator	35100926	4-Dec-2014	N/A

Table A-2: Measurement Details for Noise Monitoring

Microphone Height	1.5m
Microphone Orientation	Pointing vertically upwards
SLM Time Weighting	Fast
SLM Frequency Weighting	A
Measurement Interval Period	15 minute intervals
Logger location	On the site as presented in Figure 2-1
Measurement weather	Some rain, noise measurement data was excluded for the 7 th and 8 th of November. Weather data is included in Section A.1
Date of measurement	Between the 7 th of November, 2014 and the 18 th of November 2014

Table A-3: Noise Monitoring Results (Free Field)

Noise Descriptor	Noise Level (dB(A))
Average LA10, 18hr (6am to 12am)	51
Average LA90, 8hr (10pm to 6am)	46
L _{Amax} (24hr)	91
L _{Amax,Night} (10pm to 7am)	79
Average LA _{eq,Day} (7am to 6pm)	52
Average LA _{eq,Evening} (6pm to 10pm)	56
Average LA _{eq,Night} (10pm to 7am)	51
LA _{eq,Max} 1hr Day (7am to 6pm)	57
LA _{eq,Max} 1hr Evening(6pm to 10pm)	58
LA _{eq,Max} 1hr Night(10pm to 7am)	54
Average LA _{eq} , 15hr (7am to 10pm)	54
Average LA _{eq} , 9hr (10pm to 7am)	51
Average LA90(7am to 6pm)	45
Average LA90(6pm to 10pm)	50
Average LA90(10pm to 7am)	46
RBL Day	43
RBL Evening	45
RBL Night	42




Figure A-1: Monitoring Results (Free Field) – 7th to 13th of November




Figure A-2: Monitoring Results (Free Field) – 14th to 18th of November

A.1 Weather Data

Weather data during the measurement period was obtained from the Bureau of Meteorology weather station 040861 (Sunshine Coast Airport) and is presented in Table A- 4. Noise measurement data for the 7th and 8th of November was excluded due to rain.

Table A- 4: Weather During Logging Period

Date	Day	Temps		Rain	Evap	Sun	Max wind gust			9 am						3 pm					
		Min	Max				Dir	Spd	Time	Temp	RH	Cld	Dir	Spd	MSLP	Temp	RH	Cld	Dir	Spd	MSLP
		°C	°C	mm	mm	hours		km/h	local	°C	%	g th		km/h	hPa	°C	%	g th		km/h	hPa
1	Sa	19.0	28.1	0			NNE	56	14:47	26.6	63		N	28	1015.6	26.4	71		NNE	39	1010.1
2	Su	19.7	30.0	0			SE	43	14:11	26.8	63		NW	13	1014.6	25.7	69		SE	26	1015.2
3	Mo	21.4	24.0	0			SE	43	03:48	22.6	69		SE	28	1021.5	22.5	61		ESE	26	1020.4
4	Tu	20.8	25.9	0			E	37	02:42	22.8	54		E	20	1023.7	24.2	47		E	19	1020.6
5	We	15.6	26.4	0			NE	30	16:50	24.3	53		ENE	17	1021.4	24.8	51		ENE	19	1017.5
6	Th	15.3	27.3	0			NNE	46	15:17	25.5	44		NNE	22	1016.0	25.5	68		NNE	33	1012.1
7	Fr	17.4	27.4	8.4			NNE	30	12:02	24.2	74		NE	13	1017.5	26.3	65		NE	24	1015.4
8	Sa	20.2	26.7	2.8			ESE	33	07:42	24.0	64		SE	22	1021.3	25.3	58		ESE	22	1018.5
9	Su	14.0	27.2	0			E	26	12:53	24.4	55		ESE	13	1020.5	25.6	52		NE	19	1017.7
10	Mo	16.7	28.0	0			NE	33	13:36	26.1	60		NE	13	1019.4	25.9	58		NE	24	1016.4
11	Tu	16.0	27.5	0			NNE	39	12:23	26.1	53		NE	19	1017.3	26.0	56		NNE	28	1014.1
12	We	15.9	28.6	0			NNE	28	12:07	26.6	55		ENE	15	1017.2	26.9	57		ENE	20	1014.3
13	Th	17.2	28.7	0			NE	33	14:33	26.9	61		NE	17	1018.2	26.5	58		NE	24	1016.1
14	Fr	17.6	29.9	0			NNE	50	13:47	27.2	57		NNE	26	1019.2	26.7	65		NNE	39	1014.5
15	Sa	19.3	33.3	0			NNE	57	13:44	29.6	52		NNW	20	1014.2	28.4	64		N	43	1008.1
16	Su	22.1	41.0	0			NNE	50	13:17	32.0	48		WNW	24	1008.7	28.3	68		NNE	30	1003.2
17	Mo	21.8	28.9	0			SE	43	09:05	28.3	66		SSE	31	1012.8	25.6	65		SE	24	1012.1
18	Tu	23.7	29.4	0			NNE	31	10:48	25.6	85		NE	11	1016.0	24.3	90		NE	17	1012.8
19	We	20.1	28.5	5.0			NNE	39	16:17	24.7	82		NNE	19	1017.7	25.6	81		NNE	24	1014.3
20	Th	16.4	29.0	7.8			NNE	37	16:00	25.2	73		ENE	6	1018.5	27.7	70		NNE	28	1015.1
21	Fr	21.4	30.7	0			N	50	17:47	27.9	72		NNE	26	1016.2	28.1	71		NNE	35	1011.7
22	Sa	22.7	30.5	0			N	52	15:07	30.2	59		N	22	1015.6	28.0	68		NNE	35	1012.2
23	Su	22.0	29.6	0			NNE	39	10:17	27.2	67		NNE	26	1018.3	27.6	63		NNE	28	1015.0
24	Mo	19.6	29.5	0			NNE	46	15:06	27.1	65		NNE	24	1018.3	27.6	66		NNE	35	1013.6
25	Tu	17.5	31.0	0			NNE	43	13:15	28.2	42		NNW	19	1016.1	28.3	68		NNE	28	1012.2
26	We	20.4	29.7	0			NE	33	14:18	26.5	75		NNE	17	1017.3	27.5	64		NE	24	1014.9
27	Th	19.5	30.2	0			NE	30	12:21	27.8	63		NE	15	1016.6	28.6	60		NE	20	1013.4
28	Fr	20.3	26.5	9.0			ESE	48	17:56	24.8	78		ESE	19	1018.3	23.8	78		ESE	26	1017.1
29	Sa	21.3	27.4	3.4			E	39	06:07	26.0	48		SE	22	1018.9	25.5	49		ESE	22	1016.7
30	Su	13.4	28.3	0			ENE	28	15:13	25.4	50		E	15	1017.1	26.1	51		ENE	19	1014.3

Appendix B NOISE POLICY

B.1 Applicable Noise Policies

The development is located in a “Priority Development Area”. Therefore, Economic Development Queensland’s (EDQ’s) PDA Guideline no. 14, “Environmental values and sustainable resource use” is applicable.

The EDQ policy refers to the Environmental Protection Act 1994 (EPA 1994), the Environmental Protection (Noise) Policy 2008 (EPP 2008) and State Planning Policy 5/10 Guideline, “Air Noise and Hazardous Materials”. (SPP 5/10). SPP 5/10 has no specific noise limits, but in turn refers to the EPA 1994 and EPP 2008. Therefore, the EPP 2008 and EPA 1994 are the applicable noise policies.

The major noise sources and the applicable noise policies are summarised in Table B-5.

Table B-5: Noise Sources and Applicable Noise Policies

Noise Source	Applicable Noise Criteria
Mechanical plant noise	Environmental Protection Act 1994 (Current as at 3 July 2017), Division 3, Default Noise Standards, Section 440U Air Conditioning and Section 440V Refrigeration Equipment (EPA 1994) Environmental Protection (Noise) Policy 2008 - Acoustic Quality Objectives
Truck deliveries, refuse collection, car parking	Environmental Protection (Noise) Policy 2008 - Acoustic Quality Objectives

B.2 Mechanical Plant Associated With the Proposed Development

B.2.1 EPA 1994

Sections 440U and 440V of the *Environmental Protection Act 1994* apply to premises at or for which there is air conditioning equipment and refrigeration equipment, respectively.

An occupier of premises must not use, or permit the use of, the equipment on any day-

- Before 7a.m., if it makes a noise of more than 3 dB(A) above the background level; or
- From 7a.m. to 10 p.m, if it makes a noise of more than 5 dB(A) above the background level; or
- After 10p.m, if it makes a noise of more than 3 dB(A) above the background level.

B.2.2 EPP 2008

The acoustic quality objectives from the Environmental Protection (Noise) Policy 2008 (EPP 2008) have been adopted to assess noise emissions from mechanical plant. The acoustic quality objectives are included in Table B-6.

Table B-6: EPP 2008 Acoustic Quality Objectives

NSRs	Time of Day	Acoustic Quality Objectives, dB(A)		
		L _{Aeq,adj,1hr}	L _{A10,adj,1hr}	L _{A1,adj,1hr}
Dwelling (Outdoors)	Day and Evening (7am –10pm)	50	55	65
Dwelling (Indoors)	Day and Evening (7am –10pm)	35	40	45
Dwelling (Indoors)	(10pm – 7am)	30	35	40
Commercial and Retail activity (Indoors)	When the activity is open for business	45	-	-

The applicable noise limit during the day / evening is 50 dB(A) L_{Aeq,1hr}(7am to 10pm) at the external façade of a residence.

During the night period (10pm to 7am), the applicable noise limit is 30 dB(A) $L_{Aeq,1hr}(10pm\ to\ 7am)$, indoors. A factor of 5 dB(A) has been added to take into account noise attenuation from outdoors to indoors, assuming partially open windows, to obtain a night-time noise limit of 35 dB(A) $L_{Aeq,1hr}(7am\ to\ 10pm)$ at the external façade of a residence.

B.3 Refuse Collection, Truck Deliveries and Car Parking

Noise from truck deliveries, refuse collection, and car parking is transient, and has been described using the L_{A1} noise descriptor. The applicable EPP 2008 Acoustic Quality Objective noise limit during the day /evening is 65 dB(A) L_{A1} at the external façade of a residence.

During the night period (10pm to 7am), the applicable noise limit is 40 dB(A) L_{A1} , indoors (as presented in Table B-6). A factor of 5 dB(A) has been added to take into account noise attenuation from outdoors to indoors, assuming partially open windows, to obtain a night-time noise limit of 45 dB(A) L_{A1} at the external façade of a residence.

B.4 Noise Limits


Based on the noise criteria presented in Sections B.2 to B.3 and the noise monitoring results presented in Section 3, the applicable noise limits for all noise sources are presented in Table B-7. The noise limits for air conditioning and mechanical plant have been derived from the strictest of the EPA 1994 and the EPP 2008 Acoustic Quality Objective noise limits.

Table B-7: All Applicable Noise Limits


Noise Source	Noise Criteria	Noise Limit	Period	Where
Air-conditioning and mechanical plant	EPP 2008 Acoustic Quality Objectives	50 dB(A) L_{Aeq}	Day (7am to 6pm)	At the external façade of neighbouring residences
		50 dB(A) L_{Aeq}	Evening (6m to 10pm)	At the external façade of neighbouring residences
		35 dB(A) L_{Aeq}^1	Night (10pm to 7am)	At the external façade of neighbouring residences
Refuse collection, truck deliveries, car parking	EPP 2008 Acoustic Quality Objectives	65 dB(A) L_{A1}	Day (7am to 10pm)	At the external façade of neighbouring residences
		65 dB(A) L_{A1}	Evening (6m to 10pm)	At the external façade of neighbouring residences
		45 dB(A) L_{A1}^1	Night (10pm to 7am)	At the external façade of neighbouring residences

¹ Noise limit includes a 5 dB(A) factor for attenuation of noise from outdoors to indoors, assuming partially open windows


Appendix C BUILDING PLANS




23 November 2017





23 November 2017








23 November 2017













3D STUDY MODEL - VIEW 01
NORTH WEST CORNER, FROM DALTON DRIVE

Michael Buchan Ltd & Associates Pty Ltd
 PO Box 668 0851 Adelaide SA 5001
 Architecture • Interior Planning • Interiors • Graphics
 343 Mawson Road (pre Box 343)
 Fortitude Valley, Brisbane QLD 4005 Australia
 t +61 7 3859 9372 f +61 7 3859 9324
 www.buchan.com.au

	1972-77	1978-82	1983-87	1988-92	1993-97
1. 1972-77	100.00	100.00	100.00	100.00	100.00
2. 1978-82	100.00	100.00	100.00	100.00	100.00
3. 1983-87	100.00	100.00	100.00	100.00	100.00
4. 1988-92	100.00	100.00	100.00	100.00	100.00
5. 1993-97	100.00	100.00	100.00	100.00	100.00

MAROOCHYDORE LARGE FORMAT RETAIL - STAGE 01
DLJ TON DRILL MAROOCHYDORE

purpose FOR INFORMATION		
proj no	71-7058	
scale	3/4"	
created	11/19/17	
plotted		


DATE	ISSUE NO.	ISSUE
05	A-DA-J109	D











3D STUDY MODEL - VIEW 05
SOUTH WEST CORNER, DALTON DRIVE

Walsingham Limited is a member of the
 A20 240 080 040 440 540 640 740 840 940
 Automobile - Glass - Plastic - Lenses - Lenses - Lenses
 200 Walsingham Drive (PO Box 341)
 North York, Ontario M2N 6K6
 Tel: (416) 291-1234 Fax: (416) 291-1235
 www.walsingham.com

[illegible]

MAROOCHYDRE LARGE P
DALTON DRIVE, MAROOCHYDRE

TAIL - STAGE 01

3D STUDY MODEL - VIEW 09

purpose FOR INFORMATION	
proj no	11-7026
author	GRAT
contract	11-7026-1
grantee	
date	10/17/1966

State	City and	State
IN	A-DA-J113	B

THE BUCHAN GROUP

Appendix D EXAMPLE NOISE CALCULATION

Table D-8: Example Noise Calculation (from SoundPLAN Noise Modelling Software) – Noise from Car Door Slamming at Most Exposed NSR

Noise Source	Noise Source Sound Power Level (dB(A))	Distance from Source to Receiver (m)	Attenuation Due to Distance (dB(A))	Attenuation Due to Ground Absorption (dB(A))	Attenuation Due to Barrier (dB(A))	Attenuation Due to Air Absorption (dB(A))	Predicted External Free Field Sound Pressure Levels at NSR (dB(A))
Car Park	93	27.51	-39.78	-2.38	-0.15	-0.21	50.48