





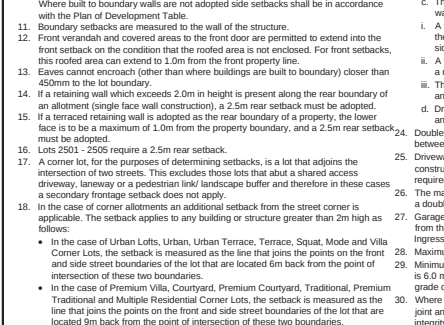




Plan of Development Table	Urban Loft Allotments		Urban Allotments		Urban Terrace Allotments		Rear Loaded Terrace Allotments		Squat Allotments		Mode Allotments		Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Premium Courtyard Allotments		Traditional Allotments		Premium Traditional Allotments		Multiple Residential Allotment (MR)	
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor
	1.5m	1.5m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	4.5m	4.5m	4.5m	4.5m	3.0m	3.0m
Garage	1.5m	n/a	4.5m	n/a	4.5m	n/a	n/a	n/a	4.5m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a
Additional setback required on some allotments - refer POD Notes 13-15.																										
Side - General Lots																										
Built to Boundary																										
Maximum BTB Wall Length																										
% of boundary length)																										
Non Built to Boundary																										
Corner Lots - Secondary Frontage																										
Laneway Lots																										
Rear of Lot																										
(from laneway boundary including garage)																										
Site Cover																										





- Legend**
- General**
- Proposed Precinct Boundary
 - Proposed Stage Boundary
 - Proposed Sub Stage Boundary
 - Possible Multiple Residential Allotment (Max. no. of dwellings)
- Open Space**
- District Recreation Park
 - Corridor Park
 - Neighbourhood Recreation Park
 - Local Recreation Park
 - Local Linear Recreation Park
 - Stormwater Detention
 - Linear Connections
- Allotment Details**
- Preferred Private Open Space Location
 - Maximum Building Location Envelope
 - Mandatory Built to Boundary Wall
 - Nominal Built to Boundary Wall
 - No Vehicle Access
 - Primary Frontage
 - 1.8m High Solid Timber Fence
 - 1.5m High Solid Timber Fence
 - Preferred Garage Location
 - Preferred Single Garage Location
 - Letterbox Location for Primary Dwelling (on a laneway)
 - Lot Impacted by Potential Acoustic Requirements
 - Bin Pad
- Notes:**
- General**
- All development is to be undertaken in accordance with the Development Approval, and Queensland Development Code (QDC), except as varied below.
 - The maximum height of buildings shall not exceed two (2) storeys except for Urban Loft allotments where three (3) storeys are acceptable.
 - Maximum building location envelopes are subject to future proposed easements and/or other underground services.
 - All lots subject to an acoustic assessment to determine level of acoustic treatments.
 - Buildings shall be constructed in accordance with Bushfire AS3959.
 - Secondary dwellings are not permitted on lots less than 400m².
 - Provisions in this POB do not relate to the Medium Density Allotment (lot 50021), the Commercial Allotment (lot 50019) or the Community Facility Allotment (lot 50023). A separate MCU application will need to be submitted for development on these lots.
 - Approved uses are House, Multiple Residential, Home Based Business, Display Home and Sales Office.
- Setbacks**
- Setbacks are as per the Plan of Development Table unless otherwise dimensioned. If a lot is not developed for a Multiple Residential (MR) site, then the equivalent size detached lot setbacks will apply.
- The location of the built to boundary walls are indicated on the Plan of Development. Where built to boundary walls are not adopted side setbacks shall be in accordance with the Plan of Development Table.
- Boundary setbacks are measured to the wall of the structure.
 - Front verandah and covered areas to the front door are permitted to extend into the front setback on the condition that the roofed area is not enclosed. For front setbacks, this roofed area can extend to 1.0m from the front property line.
 - Eaves cannot encroach (other than where buildings are built to boundary) closer than 450mm to the lot boundary.
 - If a retaining wall which exceeds 2.0m in height is present along the rear boundary of an allotment (single face wall construction), a 2.5m rear setback must be adopted.
 - If a retaining wall is adopted as the rear boundary of a property, the lower face is to be a maximum of 1.0m from the property boundary, and a 2.5m rear setback must be adopted.
 - Lots 2501 - 2505 require a 2.5m rear setback.
 - A corner lot, for the purposes of determining setbacks, is a lot that adjoins the intersection of two streets. This excludes those lots that abut a shared access driveway, laneway or a pedestrian link/landscape buffer and therefore in these cases a secondary frontage setback does not apply.
 - In the case of corner allotments an additional setback from the street corner is applicable. The setback applies to any building or structure greater than 2m high as follows:
 - In the case of Urban Lot, Urban Terrace, Terrace, Squat, Mode and Villa Corner Lots, the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 5m back from the point of intersection of these two boundaries.
 - In the case of Premium Villa, Courtyard, Premium Courtyard, Traditional, Premium Traditional and Multiple Residential Corner Lots, the setback is measured as the line that joins the points on the front and side street boundaries
- Private Open Space**
19. Private open space must measure a minimum of 10m² with a minimum dimension in any direction of 2.4 metres and must be uncovered (no roof) except for Urban Loft Allotments.
20. Urban Loft Allotments private open space must be provided in accordance with the following minimum requirements. This area may be roofed and take the form of an upper floor balcony or rooftop terrace.
- 1 Bedroom / Studio - 5m² (minimum dimension of 1.2m);
 - 2 Bedroom - 9m² (minimum dimension on 2.4m);
 - 3+ Bedroom - 12m² (minimum dimension of 2.4m).
21. Private open space must be directly accessible from a living space.
- On-site car parking and driveways**
22. On-site car parking is to be provided in accordance with the following minimum requirements:
- For lots up to 12.4 metres wide - 1 covered space per dwelling;
 - For lots 12.5 metres wide or greater - 2 covered spaces per dwelling;
 - For Multiple Residential sites, at least 1 covered space per dwelling, plus 0.5 spaces per dwelling (can be uncovered).
23. Garages for any single storey dwelling on a Lot between 10.0m and 12.49m in width must adhere to the following design criteria:
- The front facing building wall, which comprises the garage door, must not exceed an external width of 5.7m.
 - The garage door:
 - Width must not exceed 4.8m
 - Must have a minimum 450mm eave above it
 - Must be setback a minimum of 240mm behind the pillar of the garage door, and
 - Must have a sectional, tilt or roller door.
 - The front facade of the dwelling must be forward of the alignment of the garage wall, and must include the following:
 - A front entrance door with glass inserts and/or windows or with a side/side light where the front door is solid. If the front facade includes a habitable room with window, a side/side light is not required.
 - A front verandah, porch or porch located over the front entrance, which extends a minimum of 1600mm forward of the entrance door
 - The verandah, porch or porch is to include front piers with distinct materials and/or colours.
 - Driveways cannot exceed 3.0m across the verge on Lots between 10.0m and 12.49m wide.
24. Double car garages are permitted on any double storey dwelling built on a Lot between 10.0m and 12.49m or laneway dwelling.
25. Driveways are to be constructed in accordance with Logan City Council's (LCC) standards. Prior to construction, approval from LCC for Vehicular Access to Residential Premises is required.
26. The maximum width of a driveway at the lot boundary shall be 4.8 metres for a lot with a double car width garage and 3.0 metres for a lot with a single car width garage.
27. Garages and carports accessed from a Laneway must be built setback 0.9 metres from the boundary unless otherwise dimensioned on the Plan of Development. Ingress/egress must be achieved for a B99 Vehicle.
28. Maximum of one driveway per dwelling unless it is a MR lot.
29. Minimum dimension of a driveway from an intersection of one street with another street is 6.0 metres. The Driveway must be laid at the grade of the adjacent verge area. No grade changes to the verge for the driveway will be allowed.
30. Where there is a footpath within the verge, the footpath should be cut at the nearest point and the footpath reinstated to the driveway without compromising the structural integrity of the footpath.
31. Driveways must be completed prior to occupation of the dwelling.
- Fencing**
32. Fencing erected by Peet must not be altered, modified or removed without prior written approval from Peet.
33. Fencing on all park or street frontages has a maximum height of 1.2metres where solid or have a maximum height of 1.8 metres where containing openings that make the fence more than 50% transparent.
34. Fencing on all park or street frontages is constructed with visible posts, which are at least 120mm x 120mm and 100mm higher than the infill panels or panels.
- Additional Criteria for Multiple Residential Allotments (excluding Lot 50021)**
- All buildings with a width of more than 10 metres that are visible from a street or park are to include articulation to reduce the mass of the building by one or more of the following:
 - Windows recessed into the facade or bay windows;
 - Balconies, porches or verandahs;
 - Articulation of roof lines
 - Window hoods; and/or
 - Use of multiple cladding materials
 - Where adjoining an area of open space, housing design must facilitate passive surveillance of the open space, which can be achieved through the incorporation of at least one (1) habitable room orientated towards the open space.
 - Carports and garages are to be compatible with the main building design in terms of height, roof form, detailing, materials and colours.
 - All building materials must be suitably coloured, stained or painted, including retaining, fences, walls and roofs. Untreated materials, such as zinc coated steel, bare metal, concrete block or masonry panels are not permitted.
 - Air-conditioners, gas bottles, hot water systems, clothes lines and other household services must be screened and/or located to minimise visual impact to public streets or parks.
 - Homes must include a clearly identifiable and addressed front door and undercover point of entry.
 - Screened drying and rubbish bins area must be behind the main face of the dwelling.
 - At least two openings to all habitable rooms to facilitate cross flow ventilation are required.
- Slope and Building Footings**
- Buildings on sloping sites must be built to the boundary on the low side of the lot and the footing must be projected deep enough to be below the adjoining property building pad level.
 - If the nominated pad level is not provided, the pad level is to be assumed as the average of the four corners of the adjacent block, using the as constructed levels.
 - Building footings are to be designed in accordance with the appropriate Australian Standard. Building footings are to be designed to ensure that there are no adverse impacts (functional, financial or construction limitations) on adjoining allotments, particularly in relation to retaining walls.
- Additional Criteria for Secondary Dwellings**
- Floor area must be between a minimum of 30m² and 75m².
 - Materials, detailing, colours and roof form are consistent with those of the primary house.
 - Outdoor living space must measure a minimum of 9m² with a minimum dimension in any direction of 3 metres.
 - Outdoor living space must be directly accessible from the main living space and can be combined with the primary dwelling outdoor space.
 - Outdoor living space on a corner allotment must be suitably screened if located within the secondary street boundary setback.
 - A minimum of one (5m x 3m) car parking space must be provided for the secondary dwelling, in addition to parking for the primary dwelling.
 - The driveway must be shared with the primary house, however on corner allotments a separate driveway may be provided with a minimum width of 3 metres and a maximum width of 5 metres.
 - Corner allotments must provide dedicated pedestrian entry and a visible door from addressing the secondary street to the secondary dwelling.
 - Corner allotments must provide a minimum of one habitable room, with large windows or balconies, fronting the secondary street.
- Definitions**
- LaneWAY Allotment - Allotments serviced by a laneway.





Plan of Development Table	Urban Loft Allotments		Urban Terrace Allotments		Urban Terrace Allotments		Rear Loaded Terrace Allotments		Squat Allotments		Mode Allotments		Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Premium Courtyard Allotments		Traditional Allotments		Premium Traditional Allotments		Multiple Residential Allotment (MR)		
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	
Front/Primary Frontage	1.5m	1.5m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	
Garage	1.5m	n/a	4.5m	n/a	4.5m	n/a	n/a	n/a	4.5m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	
Rear	0.0m*	0.0m*	1.5m*	1.5m*	0.0m*	0.0m*	0.9m*	0.9m*	1.0m*	1.5m*	0.9m*	0.9m*	0.9m*	0.9m*	1.0m*	1.0m*	1.0m*	1.5m*	1.0m*	1.5m*	1.5m*	2.0m*	1.5m*	2.0m*	1.5m*	1.5m*	
* Additional setback required on some allotments - refer POD Notes 13-15.																											
Side - General Lots																											
Built to Boundary	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	n/a	n/a	
Maximum BTB Wall Length (% of boundary length)	85%		75%				90%		90%		75%		75%		70%		65%		65%		60%		n/a		n/a	n/a	
Non Built to Boundary	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	1.0m	1.0m	0.9m	0.9m	0.9m	0.9m	1.0m	1.0m	1.0m	1.5m	1.0m	1.5m	1.5m	2.0m	1.5m	2.0m	1.0m	1.5m	
Corner Lots - Secondary Frontage	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	2.0m	1.5m	2.0m	1.5m	1.5m	
Laneway Lots																											
Rear of Lot (from laneway boundary including garage)	n/a	n/a	n/a	n/a	n/a	n/a	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	n/a	n/a	n/a	n/a	n/a	
Site Cover	90%		75%		75%		75%		75%		75%		75%		60%		60%		60%		60%		60%		60%	75%	



Slope and Building Footings

- Buildings on sloping sites must be built to the boundary on the low side of the lot and the footing must be projected deep enough to be below the adjoining property building pad level.
- If the nominated pad level is not provided, the pad level is to be assumed as the average of the four corners of the adjacent block, using the as constructed levels.
- Building footings are to be designed in accordance with the appropriate Australian Standard. Building footings are to be designed to ensure that there are no adverse impacts (functional, financial or construction limitations) on adjoining allotments, particularly in relation to retaining walls.

Additional Criteria for Multiple Residential Allotments (excluding Lot 50021)

- Buildings must address all street frontages with driveways, pedestrian entries or both.
- All dwellings must have a clearly identifiable front door, which is undercover.
- Drying and rubbish bin areas must be located behind the main face of the dwelling or suitably screen from public streets and park frontages.
- Maximum number of dwellings on each multiple residential lot is annotated on the Plan of Development.



Additional Criteria for Secondary Dwellings

- Floor area must be between a minimum of 30m² and 75m².
- Materials, detailing, colours and roof form are consistent with those of the primary house.
- Outdoor living space must measure a minimum of 9m² with a minimum dimension in any direction of 3 metres.
- Outdoor living space must be directly accessible from the main living space and can be combined with the primary dwelling outdoor space.
- Outdoor living space on a corner allotment must be suitably screened if located within the secondary street boundary setback.
- A minimum of one (5m x 3m) car parking space must be provided for the secondary dwelling, in addition to parking for the primary dwelling.
- The driveway must be shared with the primary house, however on corner allotments a separate driveway may be provided with a minimum width of 3 metres and a maximum width of 5 metres.
- Cornor allotments must provide dedicated pedestrian entry and a visible door from and addressing the secondary dwelling.
- Cornor allotments must provide a minimum of one habitable room, with large windows or balconies, fronting the secondary street.

Definitions


Laneway Allotment - Allotments serviced by a laneway.





- Notes:**
- General**
- All development is to be undertaken in accordance with the Development Approval, and Queensland Development Code (QDC), except as varied below.
 - The maximum height of buildings shall not exceed two (2) storeys except for Urban Loft allotments where three (3) storeys are acceptable.
 - Maximum building location envelopes are subject to future proposed easements and/or other underground services.
 - All lots subject to an acoustic assessment to determine level of acoustic treatments.
 - Buildings shall be constructed in accordance with Building AS1959.
 - Secondary dwellings are not permitted on lots less than 400m².
 - Provisions in this POD do not relate to the Medium Density Allotment (lot 50021), the Commercial Allotment (lot 50019) or the Community Facility Allotment (lot 50025). A separate MCU application will need to be submitted for development on these lots.
 - Approved uses are House, Multiple Residential, Home Based Business, Display Home and Sales Office.
- Setbacks**
- Setbacks are as per the Plan of Development Table unless otherwise dimensioned. If a lot is not developed for a Multiple Residential (MR) site, then the equivalent size detached lot setbacks will apply.
 - The location of the built to boundary walls are indicated on the Plan of Development. Where built to boundary walls are not adopted side setbacks shall be in accordance with the Plan of Development Table.
 - Boundary setbacks are measured to the wall of the structure.
 - Front verandah and covered areas to the front door are permitted to extend into the front setback on the condition that the roofed area is not enclosed. For front setbacks, this roofed area can extend to 1.0m from the front property line.
 - Eaves cannot encroach (other than where buildings are built to boundary) closer than 450mm to the lot boundary.
 - If a retaining wall which exceeds 2.0m in height is present along the rear boundary of an allotment (single face wall construction), a 2.5m rear setback must be adopted.
 - If a tenanted retaining wall is adopted as the rear boundary of a property, the lower face is to be a maximum of 1.0m from the property boundary, and a 2.5m rear setback must be adopted.
 - Lots 2501 - 2505 require a 2.5m rear setback.
 - A corner lot, for the purposes of determining setbacks, is a lot that adjoins the intersection of two streets. This excludes those lots that share a shared access driveway, laneway or a pedestrian link/ landscape buffer and therefore in these cases a secondary frontage setback does not apply.
 - In the case of corner allotments an additional setback from the street corner is applicable. The setback applies to any building or structure greater than 2m high as follows:
 - In the case of Urban Lofts, Urban, Urban Terrace, Terrace, Squat, Mode and Villa Corner Lots, the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 6m back from the point of intersection of these two boundaries.
 - In the case of Premium Villa, Courtyard, Premium Courtyard, Traditional, Premium Traditional and Multiple Residential Corner Lots, the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 9m back from the point of intersection of these two boundaries.
- Private Open Space**
- Private open space must measure a minimum of 10m² with a minimum dimension in any direction of 2.4 metres and must be uncovered (no roof) except for Urban Loft Allotments.
 - Urban Loft Allotments private open space must be provided in accordance with the following minimum requirements. This area may be roofed and take the form of an upper floor balcony or rooftop terrace.
 - 1 Bedroom / Studio - 5m² (minimum dimension of 1.2m);
 - 2 Bedroom - 9m² (minimum dimension on 2.4m);
 - 3+ Bedroom - 12m² (minimum dimension of 2.4m)
 - Private open space must be directly accessible from a living space.
- On-site car parking and driveways**
- On-site car parking is to be provided in accordance with the following minimum requirements:
 - For lots up to 12.4 metres wide - 1 covered space per dwelling;
 - For lots 12.5 metres wide or greater - 2 covered spaces per dwelling;
 - For Multiple Residential sites, at least 1 covered space per dwelling, plus 0.5 spaces per dwelling (can be uncovered).
 - Garages for any single story dwelling on a Lot between 10.0m and 12.4m in width must adhere to the following design criteria:
 - The front facing building wall, which comprises the garage door, must not exceed an external width of 5.7m
 - The garage door:
 - Width must not exceed 4.8m
 - Must have a minimum 450mm eave above it
 - Must be setback a minimum of 240mm behind the pillar of the garage door, and
 - Must have a sectional, tilt or roller door.
 - The front facade of the dwelling must be forward of the alignment of the garage wall, and must include the following:
 - A front entrance door with glass inserts and / or windows or with a sidelight where the front door is solid. If the front facade includes a habitable room with window, a sidelight is not required.
 - A front verandah, portico or porch located over the front entrance, which extends a minimum of 1600mm forward of the entrance door.
 - The verandah, portico or porch is to include front fliers with distinct materials and/or colours.
 - Driveways cannot exceed 3.0m across the verge on Lots between 10.0m and 12.4m wide."



Plan of Development Table	Urban Loft Allotments		Urban Allotments		Urban Terrace Allotments		Rear Loaded Terrace Allotments		Squat Allotments		Mode Allotments		Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Premium Courtyard Allotments		Traditional Allotments		Premium Traditional Allotments		Multiple Residential Allotment (MR)																		
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor																	
	Front/Primary Frontage	1.5m	1.5m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	2.4m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	4.5m	4.5m	4.5m	4.5m	3.0m	3.0m														
Garage	1.5m	n/a	4.5m	n/a	4.5m	n/a	n/a	n/a	4.5m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a															
Rear * Additional setback required on some allotments - refer POD Notes 13-15.																																											
	0.0m *	0.0m *	1.5m *	1.5m *	0.0m *	0.0m *	0.9m *	0.9m *	1.0m *	1.5m *	0.9m *	0.9m *	0.9m *	0.9m *	1.0m *	1.0m *	1.0m *	1.5m *	1.0m *	1.5m *	1.5m *	2.0m *	1.5m *	2.0m *	1.5m *	2.0m *	1.5m *	1.5m *															
Side - General Lots																																											
Built to Boundary		0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	n/a	n/a	n/a	n/a	n/a															
Maximum STB Wall Length (% of boundary length)		85%				75%		90%				75%				70%				65%				65%				60%				n/a				n/a				n/a			
Non Built to Boundary		0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	1.0m	1.0m	0.9m	0.9m	0.9m	0.9m	1.0m	1.0m	1.0m	1.5m	1.5m	1.5m	1.5m	1.5m	2.0m	1.5m	2.0m	1.0m	1.5m															
Corner Lots - Secondary Frontage		1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	2.0m	1.5m	2.0m	1.5m	2.0m	1.5m	1.5m														
Laneway Lots																																											
Rear of Lot (from laneway boundary including garage)		n/a	n/a	n/a	n/a	n/a	n/a	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	n/a	n/a	n/a	n/a	n/a	n/a															
Site Cover		90%		75%		75%		75%		75%		75%		60%		60%		60%		60%		60%		60%		60%		60%		60%		60%		75%									




- Notes:**
- All dimensions and areas are approximate only, and are subject to survey and Council approval. Dimensions have been rounded to the nearest 0.1 metres. Areas have been rounded down to the nearest 5m². The boundaries shown on this plan should not be used for final detailed engineers design.
- Road linemarkings and turn slots are indicative only and subject to detailed design.
- Source Information:**
- Site boundaries: Registered Survey Plans / Veris.
- Adjoining information: DCDB.
- Contours: Bradies.
- Scale 1 : 1000 @ A1
- 0 5 10 20 30 40 50 60
- Double car garages are permitted on any double storey dwelling built on a Lot between 10.0m and 12.4m or laneway dwelling.
 - Driveways are to accord with Logan City Council's (LCC) standards. Prior to construction, approval from LCC for Vehicular Access to Residential Premises is required.
 - The maximum width of a driveway at the lot boundary shall be 4.8 metres for a lot with a double car width garage and 3.0 metres for a lot with a single car width garage.
 - Garages and carports accessed from a Laneway must be built setback 0.9 metres from the boundary unless otherwise dimensioned on the Plan of Development. Ingress/egress must be achieved for a B99 Vehicle.
 - Maximum of one driveway per dwelling unless it is a MR lot.
 - Minimum distance of a driveway from an intersection of one street with another street is 6.0 metres. The Driveway must be laid at the grade of the adjacent verge area. No grade changes to the verge for the driveway will be allowed.
 - Where there is a footpath within the verge, the footpath should be cut at the nearest joint and the footpath reinstated to the driveway without compromising the structural integrity of the footpath.
 - Driveways must be completed prior to occupation of the dwelling.
- Fencing**
- Fencing erected by Peet must not be altered, modified or removed without prior written approval from Peet.
 - Fencing on all park or street frontages has a maximum height of 1.2metres where solid or have a maximum height of 1.8 metres where containing openings that make the fence more than 50% transparent.
 - Fencing on all park or street frontages is constructed with visible posts, which are at least 120mm x 120mm and 100mm higher than the infill palings or panels.
 - Fencing on lanes can be screen fencing at 1.8m high where along private open space, carparking and service areas.
 - Fencing on corner lots is to be designed as front fences addressing both streets (rather than a front and a side fence).
 - Notwithstanding the above, solid front fences and walls may be 1.8 metres in height if the dwelling has a frontage to a street with traffic volumes in excess of, or projected to exceed, 10,000 vehicles per day.
- Retaining Walls**
- For retaining walls not constructed by the developer:
 - Retaining walls must not exceed more than 1.0m where fronted to a public street or park. Retaining walls to side and rear boundaries (which are not adjoining a public street or park) can be up to 2.0m. Retaining in excess of this must use terraced retaining.
 - Where retaining walls are terraced, the lower face is to be a maximum of 1.0m from the property boundary.
 - No timber retaining walls over 1.0m or adjoining parks or public streets.
 - Walls over 1.0m require RPEQ certification.
- Building Articulation**
- All buildings with a width of more than 10 metres that are visible from a street or park are to include articulation to reduce the mass of the building by one or more of the following:
 - Windows recessed into the facade or bay windows;
 - Balconies, porches or verandahs;
 - Articulation of roof lines
 - Window hoods; and/or
 - Use of multiple cladding materials
 - Where adjoining an area of open space, housing design must facilitate passive surveillance of the open space, which can be achieved through the incorporation of at least one (1) habitable room orientated towards the open space.

REVISION	PROJECT	CLIENT	Scale	Sheet	Plan Ref	Rev
A: 17/07/18 - Amend District Recreation Park B: 31/07/18 Amend Sub-Site 1 Open Space C: 21/11/2018 Further Issues Amendments D: 22/02/2019 Further Issues Amendments E: 07/03/2019 Further Issues Amendments F: 15/07/2019 Stage 2-5 Layout Amendments G: 24/07/2019 Incorporate EDQ Feedback H: 28/09/2019 Stage 2 & 3 Layout Amendments	Flagstone Precinct 1 Job Ref. 110056 Comp By. WW / JC / MD Chkd By. DG / MD Local Authority. Economic Development Queensland	PEET Plan of Development Stage 3J - 3L Residential Allotments	1 : 1000	A1	110056 - 389	H

© 2006 THE AUTHOR
JOURNAL COMPILATION © 2006 BLACKWELL PUBLISHING LTD







Date:	23 September 2019
Comp By:	WMW / JC / MD
Checked By:	DG / MD
DWG Name:	Precinct 1 Stage 4
Job Ref:	110056
Local Authority:	Economic Development Queensland
Locality:	Flagstone
Scale	1 : 1000
Sheet	A1
Plain Ref	Rev
	110056 – 399
	H





© 1999 Blackwell Science Ltd *Journal of Internal Medicine* 245: 399–407

Definitions
Lane-way Allotment - Allotments serviced by a laneway.


[illegible]

Scale: 1 : 7,500

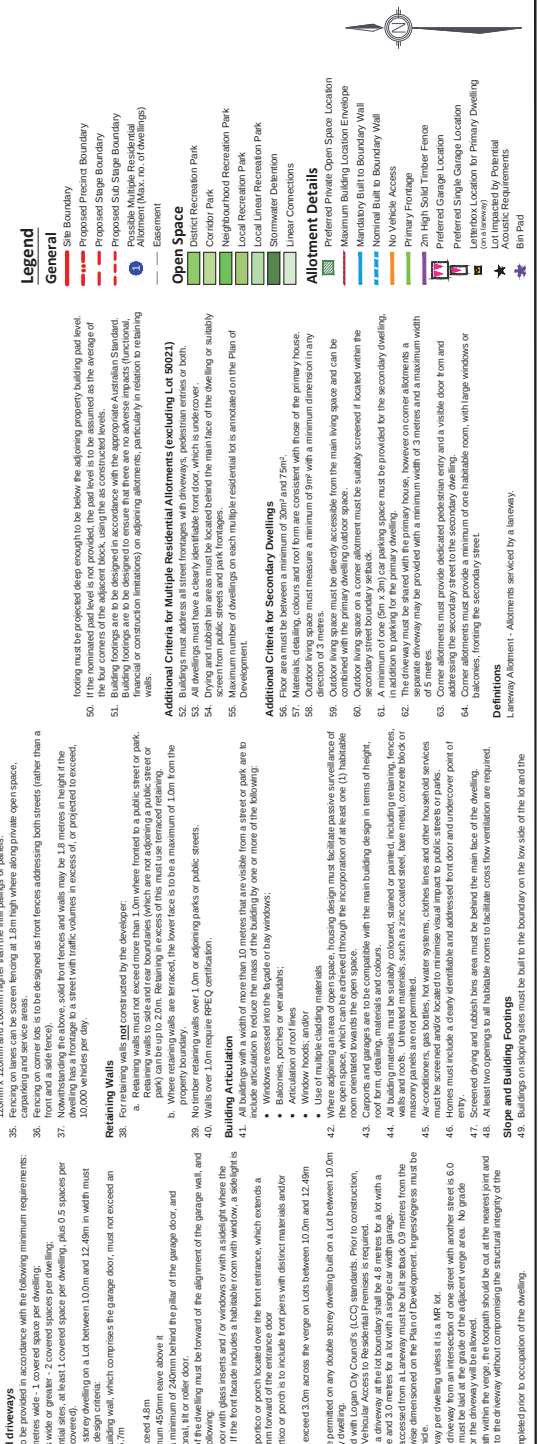

[illegible]

Scale: 1 : 7.500



General

 Proposed Precinct Boundary
 Proposed Stage Boundary
 Proposed Sub Stage Boundary
 Possible Multiple Residential Allotment (Max. no. of dwellings)

Local Linear Recreation Park

Linear Connections

- Preferred Private Open Space Location
- Maximum Building Location Envelope
- Mandatory Built to Boundary Wall
- Nominal Built to Boundary Wall
- No Vehicle Access

- 2m High Solid Timber Fence
- Preferred Double Garage Location
- Preferred Single Garage Location
- Letterbox Location for Primary Dwelling (on a laneway)
- Lot Impacted by Potential Acoustic Requirements

All dimensions and areas are approximate only, and are subject to survey and Council approval.

Dimensions have been rounded to the nearest 0.1 metres.

Areas have been rounded down to the nearest 5m².

The boundaries shown on this plan should not be used for final detailed engineers design.



Road linemarkings and turn slots are indicative only and subject to detailed design.

Source Information:
Site boundaries: Registered
Survey Plans / Veris.
Adjoining information: DCDB.
Copyright: Meinhardt

Scale 1 : 1000 @ A1

General

2. The maximum height of buildings shall not exceed two (2) stories except for Urban Loft allotments where three (3) stories are acceptable.
3. Maximum building location envelopes are subject to future proposed easements and/or other underground services.
4. All lots subject to an acoustic assessment to determine level of acoustic treatments.
5. Buildings shall be constructed in accordance with Building Act AS3959.
6. Secondary dwellings are not permitted on lots less than 400m².
7. Provisions in this POD do not relate to the Medium Density Apartment (lot 50021), the Commercial Allotment (lot 50019) or the Community Facility Allotment (lot 50025). A separate MCI application will need to be submitted for development on these lots.
8. Approved uses are House, Multiple Residential, Home Based Business, Display Home and Sales Office.

10. The location of the built boundary walls are indicated on the Plan of Development. Where built to boundary walls are not adopted side setbacks shall be in accordance with the Plan of Development Table.
11. All areas are measured to the face of the building.
12. Front verandah and covered areas to the front door are permitted to extend into the front setback on the condition that the roofed area is not enclosed. For front setbacks, this roofed area can extend to 1.0m from the front property line.
13. Easement boundaries (other than where buildings are built to boundary) closer than 450mm to the lot boundary shall be indicated on the Plan of Development.
14. If a retaining wall which exceeds 2.0m in height is present along the rear boundary of an allotment (single face wall construction), a 2.5m rear setback must be adopted.
15. If a terraced retaining wall is adopted as the rear boundary of a property, the lower face is to be a maximum 1.0m from the property boundary, and a 2.5m rear setback must be adopted.
16. Lots 2501 - 2505 require a 2.5m rear setback.
17. A corner lot, for the purposes of determining setbacks, is a lot that adjoins the intersection of two streets. Lots 2501, 2502, 2503, 2504 and 2505 are corner lots. The intersection of the street and pedestrian link/ landscape buffer and therefore in these cases a secondary frontage setback does not apply.
18. In the case of corner allotments an additional setback to the street corner is applicable. The setback applies to any building or structure greater than 2m high as follows:
 - a. In the case of Urban Village, the setback is 1.0m from the street corner.
 - b. In the case of Terrace, the setback is 1.0m from the street corner.
19. The setback is measured along the line that joins the points on front and side side boundaries of the lot that are located 6m back from the point of intersection of these two boundaries.
20. In the case of Premium Villa, Courtyard, Premium Courtyard, Traditional, Premium Traditional and Multiple Premium Corner Lots, the setback is 1.0m from the street corner. The setback is measured along the line that joins the points on front and side side boundaries of the lot that are located 5m back from the point of intersection of these two boundaries.

19. Private open space must measure a minimum of 10m² with a minimum dimension in any direction of 2.4 metres and must be uncovered (no roof) except for Urban Lot Allotments.
20. Urban Lot Allotments private open space must be provided in accordance with the following minimum requirements. This area may be roofed and take the form of an upper floor balcony or rooftop terrace.
 - 1 Bedroom / Studio - 5m² (minimum dimension of 1.2m);
 - 2 Bedroom - 9m² (minimum dimension on 2.4m);
 - 3+ Bedroom - 12m² (minimum dimension of 2.4m)
21. Private open space must be directly accessible from a living space.

22. On-site car parking is to be provided in accordance with the following minimum requirements:

- For lots up to 12.4 metres wide - 1 covered space per dwelling;

[illegible]

Where retaining walls are terraced, the lower face is to be a maximum of 1.0m from the property boundary to timber retaining walls over 1.0m or adjoining parks or public streets.

41. All buildings with a width of more than 10 metres that are visible from a street or park are to include articulation to reduce the mass of the building by one or more of the following:
 - Windows recessed into the facade or bay windows;
 - Balconies, porches or verandahs;
 - Articulation of roof lines
 - Window hoods; and/or
 - Use of multiple cladding materials.
42. Where adjoining an area of open space, housing design must facilitate passive surveillance of the open space, which can be achieved through the incorporation of at least one (1) habitable room oriented towards the open space.
43. Carports and garages are to be compatible with the main building design in terms of height, roof form, detailing, materials and colours.
44. All building materials must be zinc-coated, stained or painted, including retaining, fences, walls and roofs. Materials such as zinc coated steel, bare metal, concrete block or masonry panels are not permitted.
45. Air-conditions, gas bottles, hot water systems, clothes lines and other household services must be screened and/or located to minimise visual impact to public streets or parks.
46. Homes must include a clearly identifiable and addressed front door and undercover point of entry.
47. Screened doors and rubbish bins are must be located at the rear of the dwelling.
48. At least two openings to all habitable rooms to facilitate cross flow ventilation are required.

49. Buildings on sloping sites must be built to the boundary on the low side of the lot and the footing must be projected deep enough to be below the adjoining property building pad level.

50. If the nominated pad level is not provided, the pad level is to be assumed as the average of the four corners of the adjacent block, using the as constructed levels.

51. Building footings are to be designed in accordance with the appropriate Australian Standard. Building footings are to be designed to ensure that there are no adverse impacts (functional, financial or construction limitations) on adjoining allotments, particularly in relation to retaining walls.


52. Buildings must address all street frontages with driveways, pedestrian entries or both.
53. All dwellings must have a clearly identifiable front door, which is undercover.
54. Drying and rubbish bin areas must be located behind the main face of the dwelling or suitably screen from public streets and park frontages.
55. Maximum number of dwellings on each multiple residential lot is annotated on the Plan of Development.

56. Floor area must be between a minimum of 30m² and 75m².
57. Materials, detailing, colours and roof form are consistent with those of the primary house.
58. Outdoor living space must measure a minimum of 3 metres in minimum dimension in any direction of 3 metres.
59. Outdoor living space must be directly accessible from the main living space and can be combined with the secondary dwelling outdoor space.
60. Outdoor living space on a corner allotment must be suitably screened if located within the secondary street boundary setback.
61. A minimum of one (5m x 3m) car parking space must be provided for the secondary dwelling, in addition to carport for the primary dwelling.
62. The driveway must be shared with the primary house, however on corner allotments a separate driveway may be provided with a minimum width of 3 metres and a maximum width of 5 metres.
63. Corner allotments must provide dedicated pedestrian entry and a visible door from and addressing the secondary street to the secondary dwelling.
64. Corner allotments must provide a minimum of one habitable room, with large windows or balconies, fronting the secondary street.

Laneway Allotment - Allotments serviced by a laneway.

REVISION A. 31/07/18 Amend Sub-Staging & Open Space B. 24/10/18 Amended Layout C. 03/12/2018 Further Issues Amendments D. 22/02/2019 Further Issues Amendments E. 07/03/2019 Further Issues Amendments F. 15/07/2019 Amended Layout G. 24/07/2019 Incorporate EDQ Feedback H. 23/09/2019 Stage 2 & 3 Layout Amendments	PROJECT Flagstone Precinct 1	CLIENT PEET Plan of Development Stage 5A - C & F Residential Allotments	URBAN DESIGN Level 4 HQ South 520 Wickham Street PO Box 1559 Fortitude Valley QLD 4006 T +61 7 3539 9500 W ipdesign.com.au			
	Job Ref. 110056		Date. 23 September 2019	© COPYRIGHT PROTECTS THIS PLAN Unauthorized reproduction or amendment not permitted. Please contact the author.		
	Comp By. WW/JC/MD		DWG Name. Precinct 1 Stage 5			
	Chkd By. DG/MD		Locality. Flagstone			
	Local Authority. Economic Development Queensland					
		Scale 1 : 1000	Sheet A1	Plan Ref 110056 – 411	Rev H	





Note:
All dimensions and areas are approximate only, and are subject to survey and Council approval. Dimensions have been rounded to the nearest 0.1 metres. Areas have been rounded down to the nearest 5m². The boundaries shown on this plan should not be used for final detailed engineers design.

Road line markings and turn slots are indicative only and subject to detailed design.
Source Information:
Site boundaries: Registered Survey Plans / Veris.
Adjoining information: DCDB.
Contours: Meinhardt.

Legend

- General**
- Proposed Precinct Boundary
 - Proposed Stage Boundary
 - Proposed Sub Stage Boundary
 - Possible Multiple Residential Allotment (Max. no. of dwellings)

Open Space

- Linear Connections

Allotment Details

- Preferred Private Open Space Location
- Maximum Building Location Envelope
- Mandatory Built to Boundary Wall
- Nominal Built to Boundary Wall
- No Vehicle Access
- Primary Frontage
- 2m High Solid Timber Fence
- Preferred Double Garage Location
- Preferred Single Garage Location
- Letterbox Location for Primary Dwelling (on a laneway)
- Lot Impacted by Potential Acoustic Requirements

Notes:

- General:**
- All development is to be undertaken in accordance with the Development Approval, and Queensland Development Code (QDC), except as varied below.
 - The maximum height of buildings shall not exceed two (2) storeys except for Urban Loft allotments where three (3) storeys are acceptable.
 - Maximum building location envelopes are subject to future proposed easements and/or other underground services.
 - All lots subject to an acoustic assessment to determine level of acoustic treatments.
 - Buildings shall be constructed in accordance with Bushfire AS3959.
 - Secondary dwellings are not permitted on lots less than 400m².
 - Provisions in this PCD do not relate to the Medium Density Allotment (lot 50021), the Commercial Allotment (lot 50019) or the Community Facility Allotment (lot 50025). A separate MCU application will need to be submitted for development on these lots.
 - Approved uses are House, Multiple Residential, Home Based Business, Display Home and Sales Office.

Setbacks

- Setbacks are as per the Plan of Development Table unless otherwise dimensioned. If a lot is not developed for a Multiple Residential (MR) site, then the equivalent site detached lot setbacks will apply.
- The location of the built to boundary walls are indicated on the Plan of Development. Where built to boundary walls are not adopted side setbacks shall be in accordance with the Plan of Development Table.
- Boundary setbacks are measured to the wall of the structure.
- Front verandah and covered areas to the front door are permitted to extend into the front setback on the condition that the roofed area is not enclosed. For front setbacks, this roofed area can extend to 1.0m from the front property line.
- Eaves cannot encroach (other than where buildings are built to boundary) closer than 450mm to the lot boundary.
- If a retaining wall which exceeds 2.0m in height is present along the rear boundary of an allotment (single face wall construction), a 2.5m rear setback must be adopted.
- If a terraced retaining wall is adopted as the rear boundary of a property, the lower face is to be a maximum of 1.0m from the property boundary, and a 2.5m rear setback must be adopted.
- Lots 2501 - 2505 require a 2.5m rear setback.
- A corner lot, for the purposes of determining setbacks, is a lot that adjoins the intersection of two streets. This excludes those lots that abut a shared access driveway, laneway or a pedestrian link/ landscape buffer and therefore in these cases a secondary frontage setback does not apply.
- In the case of corner allotments an additional setback from the street corner is applicable. The setback applies to any building or structure greater than 2m high as follows:
 - In the case of Urban Lots, Urban, Urban Terrace, Terrace, Squat, Mode and Villa Corner Lots, the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 6m back from the point of intersection of these two boundaries.
 - In the case of Premium Villa, Courtyard, Premium Courtyard, Traditional, Premium Traditional and Multiple Residential Corner Lots, the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 9m back from the point of intersection of these two boundaries.

Private Open Space

- Private open space must measure a minimum of 10m² with a minimum dimension in any direction of 2.4 metres and must be uncovered (no roof) except for Urban Loft Allotments.
- Urban Loft Allotments private open space must be provided in accordance with the following minimum requirements. This area may be roofed and take the form of an upper floor balcony or rooftop terrace.
 - 1 Bedroom / Studio - 5m² (minimum dimension of 1.2m);
 - 2 Bedroom - 9m² (minimum dimension of 2.4m);
 - 3+ Bedroom - 12m² (minimum dimension of 2.4m)
- Private open space must be directly accessible from a living space.

On-site car parking and driveways


- On-site car parking is to be provided in accordance with the following minimum requirements:
 - For lots up to 12.4 metres wide - 1 covered space per dwelling;
 - For lots 12.5 metres wide or greater - 2 covered spaces per dwelling;
 - For Multiple Residential sites, at least 1 covered space per dwelling, plus 0.5 spaces per dwelling (can be uncovered).
- Garages for any single story dwelling on a Lot between 10.0m and 12.49m in width must adhere to the following design criteria:
 - The front facing building wall, which comprises the garage door, must not exceed an external width of 5.7m
 - The garage door:
 - Width must not exceed 4.8m
 - Must have a minimum 450mm eave above it
 - Must be setback a minimum of 240mm behind the pillar of the garage door, and
 - Must have a sectional, lift or roller door.
 - The front facade of the dwelling must be forward of the alignment of the garage wall, and must include the following:

Plan of Development Table		Urban Loft Allotments	Urban Allotments	Urban Terrace Allotments	Rear Loaded Terrace Allotments	Squat Allotments	Mode Allotments	Villa Allotments	Premium Villa Allotments	Courtyard Allotments	Premium Courtyard Allotments	Traditional Allotments	Premium Traditional Allotments	Multiple Residential Allotment (MR)
Front/Primary Frontage		Ground Floor 1.5m	First Floor 1.5m	Ground Floor 2.4m	First Floor 2.4m	Ground Floor 2.4m	First Floor 2.4m	Ground Floor 2.4m	First Floor 3.0m	Ground Floor 3.0m	First Floor 3.0m	Ground Floor 4.5m	First Floor 4.5m	Ground Floor 4.5m
Rear		0.0m*	0.0m*	1.5m*	1.5m*	0.0m*	0.0m*	0.9m*	0.9m*	0.9m*	1.0m*	1.0m*	1.5m*	1.5m*
Side - General Lots		0.0m*	0.0m*	0.0m*	0.0m*	0.0m*	0.0m*	0.0m*	0.0m*	0.0m*	0.0m*	0.0m*	0.0m*	0.0m*
Built to Boundary		0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m
Maximum BTB Wall Length (% of boundary length)		85%	75%	90%	90%	75%	75%	70%	65%	65%	60%	n/a	n/a	n/a
Non Built to Boundary		0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	1.5m	1.5m	1.5m
Corner Lots - Secondary Frontage		0.9m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	2.0m	2.0m
Laneway Lots		0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m
Rear of Lot (from laneway boundary including garage)		n/a	n/a	n/a	n/a	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	n/a	n/a	n/a
Site Cover		90%	75%	75%	75%	75%	75%	60%	60%	60%	60%	60%	60%	75%

PLANS AND DOCUMENTS referred to in the PDA DEVELOPMENT APPROVAL

Approval no: DEV2012/403

Date: 25 November 2019



Building Articulation

- All buildings with a width of more than 10 metres that are visible from a street or park are to include articulation to reduce the mass of the building by one or more of the following:
 - Windows recessed into the facade or bay windows;
 - Balconies, porches or verandahs;
 - Articulation of roof lines
 - Window hoods; and/or
 - Use of multiple cladding materials
- Where adjoining an area of open space, housing design must facilitate passive surveillance of the open space, which can be achieved through the incorporation of at least one (1) habitable room orientated towards the open space.
- Carports and garages are to be compatible with the main building design in terms of height, roof form, detailing, materials and colours.
- All building materials must be suitably coloured, stained or painted, including retaining, fences, walls and roofs. Materials, detailing, colours and roof form are to be consistent with those of the primary house.
- Air-conditioners, gas bottles, hot water systems, clothes lines and other household services must be screened and/or located to minimise visual impact to public streets or parks.
- Homes must include a clearly identifiable and addressed front door and undercover point of entry.
- Screened drying and rubbish bins area must be behind the main face of the dwelling.
- At least two openings to all habitable rooms to facilitate cross flow ventilation are required.

Slope and Footing Footings

- Buildings on sloping sites must be built to the boundary on the low side of the lot and the footing must be projected deep enough to be below the adjoining property building pad level.
- If the nominated pad level is not provided, the pad level is to be assumed as the average of the four corners of the adjacent block, using the as constructed levels.
- Building footings are to be designed in accordance with the appropriate Australian Standard. Building footings are to be designed to ensure that there are no adverse impacts (functional, financial or construction limitations) on adjoining allotments, particularly in relation to retaining walls.
- Buildings must address all street frontages with driveways, pedestrian entries or both.
- All dwellings must have a clearly identifiable front door, which is undercover.
- Drying and rubbish bin areas must be located behind the main face of the dwelling or suitably screen from public streets and park frontages.
- Maximum number of dwellings on each multiple residential lot is annotated on the Plan of Development.

Additional Criteria for Multiple Residential Allotments (excluding Lot 50021)

- Buildings must address all street frontages with driveways, pedestrian entries or both.
- All dwellings must have a clearly identifiable front door, which is undercover.
- Drying and rubbish bin areas must be located behind the main face of the dwelling or suitably screen from public streets and park frontages.
- Maximum number of dwellings on each multiple residential lot is annotated on the Plan of Development.
- Additional Criteria for Secondary Dwellings
- Flora area must be between a minimum of 30m² and 75m².
- Materials, detailing, colours and roof form are to be consistent with those of the primary house.
- Outdoor living space must measure a minimum of 9m² with a minimum dimension in any direction of 3 metres.
- Outdoor living space must be directly accessible from the main living space and can be combined with the primary dwelling outdoor space.
- Outdoor living space on a corner allotment must be suitably screened if located within the secondary street boundary setback.
- A minimum of one (5m x 3m) car parking space must be provided for the secondary dwelling, in addition to parking for the primary dwelling.
- The driveway must be shared with the primary house, however on corner allotments a separate driveway may be provided with a minimum width of 3 metres and a maximum width of 5 metres.
- Corner allotments must provide dedicated pedestrian entry and a visible door from and addressing the secondary street to the secondary dwelling.
- Corner allotments must provide a minimum of one habitable room, with large windows or balconies, fronting the secondary street.

Definitions

Laneway Allotment - Allotments serviced by a laneway.

REVISION	PROJECT	Flagstone Precinct 1	CLIENT
A: 31/07/18 Amend Sub-Staging & Open Space B: 24/10/18 Amended Layout C: 03/12/2018 Further Issues Amendments D: 22/02/2019 Further Issues Amendments E: 07/03/2019 Further Issues Amendments F: 15/07/2019 Amended Layout G: 24/07/2019 Incorporate EDQ Feedback H: 28/08/2019 Stage 2 & 3 Layout Amendments	Job Ref. 110056	Date: 23 September 2019	
	Comp By: WW/JC/MD	DWG Name: Precinct 1 Stage 5	
	Chk'd By: DG/MD	Locality: Flagstone	
	Local Authority: Economic Development Queensland		

PEET

Plan of Development
Stage 5L & M
Residential Allotments

rps

© COPYRIGHT PROTECTS THIS PLAN
Unauthorised reproduction or amendment not permitted. Please contact the author.

URBAN DESIGN
Level 4 HQ South
530 Wickham Street
PO Box 1559
Fortitude Valley QLD 4006
T +61 7 2328 9500
W rpsgroup.com

Scale	Sheet	Plan Ref	Rev
1 : 500	A1	110056 - 415	H