

SILKWOOD HOMES
PACIFIC 230 - PLANTATION
PROPOSED DWELLINGS FOR:
JOANNE MARIE KERIN
JOB NO.: SILK1279
LOT 8235 #26, NAPIER CRESCENT
BANYA, QLD 4551

Layout Index	
Layout No.	Layout Name
01	COVER PAGE
02	GENERAL NOTES
03	ADDITIONAL NOTES
04	SITE PLAN
05	DRIVEWAY SECTIONS
06	LANDSCAPE PLAN
07	FLOOR PLAN
08	CIRCULATION PLAN
09	ELEVATIONS
10	ELEVATIONS
11	SECTION
12	SLAB PLAN
13	FRAME LAYOUT PLAN
14	FLOOR COVERINGS & LIGHTING/FAN/USB/DAT...
15	POWER POINT PLAN
16	EMERGENCY CIRCUIT PLAN
17	ROOF PLAN
18	INTERNALS
19	INTERNALS
20	INTERNALS
21	INTERNALS
22	NDIS FIXING DETAILS
23	DETAILS
24	FIRE SAFETY PLAN
25	1:150 HYDRAULIC PLAN



PLANS AND DOCUMENTS
referred to in the PDA
DEVELOPMENT APPROVAL

Approval no: DEV2025/1597

Date: 1 April 2025



GENERAL NOTES

1. THE BUILDING CODE OF AUSTRALIA (B.C.A.) & RELEVANT AMENDMENTS AND UPDATES, INCLUDING THE STANDARDS ASSOCIATION OF AUST. (AS.) CODES SHALL BE THE MINIMUM STANDARDS FOR COMPLIANCE.
2. CHECK ALL DIMENSIONS OF SITE AND BUILDING(S) SETOUT PLANS AND CHECK AGAINST SURVEYORS SITE SETOUT. CLARIFY ANY DISCREPANCY TO NOTED DIMENSIONS OR OFFSETS PRIOR TO CONSTRUCTION OF ANY WORK. ENSURE SURVEYORS WORK RELATES TO CURRENT SITE FIELD WORK
3. NOTED DIMENSIONS SHALL TAKE PRECEDENCE TO SCALED DIMENSIONS.
4. CHECK HYDRAULIC AND MECHANICAL PLANS FOR SETOUT AND SIZING OF SERVICE DUCT(S) WHERE & IF APPLICABLE.
5. CO-ORDINATE ALL CONSULTANTS DOCUMENTS AND BRING ANY DISCREPANCIES TO THE ATTENTION OF THE RELEVANT CONSULTANT(S) PRIOR TO THE CONSTRUCTION OF THAT PART OF THE WORKS.
6. CHECK ON SITE - OPENINGS BEFORE FABRICATION OF DOORS, WINDOWS & ANY OTHER FIXTURES. GIVEN SIZES ARE FOR QUOTATION PURPOSES ONLY AND MUST BE CONFIRMED ON SITE.
7. CHECK THE CONSTRUCTION PLAN IS THE MOST RECENT AMENDMENT. IF IN DOUBT CONFIRM WITH THE RELEVANT CONSULTANT.
8. REFER SPECIFIC CONDITIONS OF BUILDING APPROVAL FOR ANY ADDITIONAL REQUIREMENTS.
9. ENSURE DOORS TO SANITARY COMPARTMENTS COMPLY WITH THE BUILDING CODE OF AUSTRALIA F2.5 AND HAVE EITHER :
- (a) LIFT OFF HINGES FOR INWARD SWINGING DOORS or
- (b) OUTWARD SWINGING DOORS.
10. ALL AREAS UNDER BUILDING WORK TO BE PROTECTED FROM TERMITE ATTACK IN ACCORDANCE WITH AN APPROVED METHOD UNDER AS.3660.1
11. TIMBER FRAMING SHALL BE IN ACCORDANCE WITH THE BUILDING CODE OF AUSTRALIA (B.C.A.) , PLUS ALL AMENDMENTS, AND THE 'LIGHT TIMBER FRAMING CODE' AS.1684, PART 2 FOR NON-CYCLONIC AREAS AND AS.1684 PART 1 FOR CYCLONIC AREAS.

AUSTRALIAN STANDARDS

ALL WORKMANSHIP AND MATERIALS SHALL COMPLY WITH RELEVANT CURRENT AUSTRALIAN STANDARDS AND THE CURRENT BUILDING ACT.

SMOKE ALARMS TO COMPLY WITH NCC 2022 ABCA HOUSING PROVISIONS PART 9.5

ALUMINIUM FRAMED, GLAZED JOINERY SHALL BE INSTALLED IN ACCORDANCE WITH A.S.1288 "INSTALLATION OF GLASS IN BUILDINGS"

- WATERPROOFING TO BE IN ACCORDANCE WITH NCC 2022 SECTION 10.2 OF THE ABCB HOUSING PROVISIONS AREAS OF BUILDING TO BE TERMITE PROTECTED SHALL BE DONE SO IN ACCORDANCE WITH AS.3660.1 "PROTECTION OF BUILDING FROM SUBTERRANEAN TERMITES" PART 1:NEW BUILDINGS.

REQUIREMENTS FOR SUSTAINABLE BUILDINGS

FOR NEW CLASS 1 BUILDING AND SOLE-OCCUPANCY UNIT OF A NEW CLASS 2 BUILDING, AND RENOVATED BATHROOMS IN AN EXISTING CLASS 1 AND A SOLE-OCCUPANCY UNIT OF AN EXISTING CLASS 2 FOR BUILDING.

ACCEPTABLE SOLUTIONS:

SHOWER ROSES: (TO RETICULATED MAINS WATER SUPPLY AREAS ONLY)

THIS APPLIES TO NEW CLASS 1 BUILDINGS AND SOLE-OCCUPANCY UNITS OF NEW CLASS 2 BUILDINGS, OR WHERE THE BATHROOM OF THESE BUILDING RENOVATIONS. SHOWER ROSES TO BE 3 STAR RATING UNDER WATER EFFICIENCY LABELLING SCHEME (WELS) OR A AAA RATING WHEN ASSESSED AGAINST AS/NZ 6400:2005 WATER EFFICIENT PRODUCTS- RATING AND LABELLING.

WATER PRESSURE LIMIT: (TO RETICULATED MAINS WATER SUPPLY AREAS ONLY)

THE MAXIMUM PRESSURE LEVEL OF WATER FROM ANY OUTLET WITHIN THE PROPERTY BOUNDARIES OF A NEW CLASS 1 BUILDING MUST NOT EXCEED 500KPA. COMPLIANCE CAN BE ACHIEVED THROUGH THE INSTALLATION OF A WATER PRESSURE LIMITING DEVICE IN LINE WITH THE WATER METER. WHERE IT IS KNOWN THAT THE PRESSURE LEVEL OF THE WATER SUPPLY DOES NOT EXCEED 500KPA, WATER PRESSURE LIMITING DEVICE IS NOT REQUIRED.

DUAL FLUSH TOILETS:

THIS APPLIES TO NEW CLASS 1 BUILDINGS AND SOLE-OCCUPANCY UNITS OF NEW CLASS 2 BUILDINGS OR WHERE TOILETS ARE REPLACED IN THE BATHROOMS OF THESE BUILDING CLASSIFICATIONS UNDERGO RENOVATIONS. A TOILET MUST HAVE A DUAL FLUSH CAPACITY THAT DOES NOT EXCEED 6 LITRES ON FULL FLUSH AND 3 ON HALF FLUSH

ENERGY EFFICIENT LIGHTING:

THIS APPLIES TO NEW CLASS 1 BUILDINGS AND SOLE-OCCUPANCY UNITS IN CLASS 2 BUILDINGS. ENERGY EFFICIENT LIGHTING INCLUDES FLUORESCENT AND LED LIGHTS. IT DOES NOT INCLUDE INCANDESCENT OR HALOGEN LIGHTS. COMPLIANCE IS ACHIEVED WHEN ENERGY EFFICIENT LIGHTS ARE USED FOR ABOUT 80% OF THE TOTAL FLOOR AREA OF THE BUILDING OR SOLE-OCCUPANCY UNIT. (FLOOR AREA MEANS THE AREA OF A ROOM MEASURED WITHIN THE FINISHED SURFACES OF THE WALLS, AND INCLUDES THE AREA OCCUPIED BY ANY CUPBOARD OR OTHER BUILT IN FURNITURE, FIXTURE OR FITTING) THIS AREA INCLUDES ASSOCIATED GARAGES.

WHERE PART OF A HOUSE IS LIT BY MORE THEN ONE LIGHT SOURCE, AND ONE MORE OF THOSE LIGHT SOURCES IS NOT DEEMED TO BE EFFICIENT LIGHTING, THEN THAT PART OF THE HOUSE IS NOT CONSIDERED TO HAVE EFFICIENT LIGHTING, AND THEN THEREFORE DOES NOT QUALIFY TOWARDS THE 80% EFFICIENT LIGHT REQUIREMENT.

HOT WATER SUPPLY: IN A NEW CLASS 1

A SUITABLE HOT WATER SYSTEM INCLUDES:

A) A GAS HOT WATER SYSTEM WITH A FIVE STAR ENERGY RATING; OR

B) A HEAT PUMP OR A SOLAR HOT WATER SYSTEM WHERE:

I) IN A BUILDING 3 OR MORE BEDROOMS , THE HOT WATER SYSTEM, MUST BE ELIGIBLE TO RECEIVE AT LEAST 22 RENEWABLE ENERGY CERTIFICATES; OR

II)IN A BUILDING WITH 1 OR 2 BEDROOMS THE HOT WATER SYSTEM MUST BE ELIGIBLE TO RECEIVE AT LEAST 14 RENEWABLE ENERGY CERTIFICATES.

NOTES:

* METER BOX & HWS POSITIONS TO BE DETERMINED BY SUPERVISOR.

* L.O.H. DOORS TO W.C.

* SHOWERS - NO DOOR 900 CLEAR OPENING U.N.O.

* Smoke alarms to comply with the Building Regs 06 Part 3A, Fire & Emergency Services Bill 2016 & the NCC.

PLANS AND DOCUMENTS referred to in the PDA DEVELOPMENT APPROVAL

Approval no: DEV2025/1597

Date: 1 April 2025



- ## 1. PEDESTRIAN ENTRY

- STEP FREE LEVEL TRANSITION OF SURFACE MATERIALS TO ALL DOORWAYS WITH **MAX 3MM (SQUARE EDGE) OR 5MM (ROUNDED EDGE)** IF HEIGHT DIFFERENCE REQUIRED
- STEP FREE, EVEN, FIRM P4 / R11 SLIP RESISTANT SURFACE TO THE MIN 1200MM CLEAR WIDTH WALKWAYS (ACCESS-WAY) FROM THE FRONT BOUNDARY TO THE DWELLING ACCESS AND PARTICIPANT PARKING SPACE, WITH A CROSS FALL OF LESS THAN 1:40 GRADE (2.5% GRADE) AND A GRADE IN THE DIRECTION OF TRAVEL OF LESS THAN 1:21 GRADE (4.7% GRADE) & 65MM HIGH KERB RAILS TO EACH SIDE OF THE ACCESS-WAYS
 - STEP FREE, EVEN, FIRM P4 / R11 SLIP RESISTANT SURFACE TO 1500MM X 1500MM LANDING RAMPS (MIN 9.0M INTERVALS IN AN ACCESS RAMP AND CHANGE OF DIRECTION WITH A CROSS FALL OF LESS THAN 1:40 GRADE (2.5% GRADE) AND A GRADE IN THE DIRECTION OF TRAVEL OF LESS THAN 1:40 GRADE (2.5% GRADE)
 - 280MM DEEP X 35MM HIGH (1:10 GRADE) X FULL WIDTH OF DOOR, STEP RAMP, WITH P5 R12 SLIP RESISTANCE TO ALL EXTERNAL DOORS
 - CLEAR OPENING OF 950MM MIN WHEN DOOR OPEN AT 90 DEGREE ANGLE TO THE JAMB

- ## 2. CAR PARKING

- EVEN, FIRM P4 R11 SLIP RESISTANT SURFACE TO THE WALKWAYS, LANDINGS AND RAMP
- TO THE DWELLING ACCESS & ACCESSIBLE PATH OF TRAVEL & GARAGE FLOOR
- MIN PARKING DIMENSIONS FOR PARTICIPANT CAR 3800MM WIDTH 5400MM LENGTH
- MAXIMUM GRADE OF 1:40 (2.5% GRADE) IN ALL DIRECTION
- STEP FREE LEVEL TRANSITION TO ALL DOORWAYS WITH **MAX** 3MM (SQUARE EDGE) OR
- 5MM (ROUNDED EDGE) IF HEIGHT DIFFERENCE REQUIRED
- GARAGE CEILING HEIGHT MIN 2500MM - GARAGE DOOR HEAD HEIGHT MIN 2200MM
- (2250MM IDEALLY)

- ### 3. ENTRANCE DOORS AND HARDWARE

- MIN CLEAR, UNDER ROOF DOOR LANDING 1500MM X 1500MM WITH MAXIMUM GRADE OF 1:40 (2.5% GRADE) IN ANY DIRECTION
- DOOR HARDWARE TO BE LEVER TYPE AND 1050MM AFFL (BETWEEN 900MM - 1100MM)
- CONTRAST COLOUR (MIN 30% CONTRAST) PAINT TO ALL INTERNAL & INSIDE OF EXTERNAL DOOR FRAMES / ARCHITRAVES (MIN 50MM WIDE)
- STEP FREE LEVEL TRANSITION TO ALL DOORWAYS WITH **MAX** 3MM (SQUARE EDGE) OR 5MM (ROUNDED EDGE) IF HEIGHT DIFFERENCE REQUIRED
- CLEAR OPENING OF 950MM MIN WHEN DOOR OPEN AT 90 DEGREE ANGLE TO THE JAMB
- POWER AND CONTROL CABLING TO HEAD OF ALL EXTERNAL DOORS - INSIDE HINGED SIDE ABOVE THE DOOR
- LEVER TYPE DOOR HANDLES WITH BETWEEN 35MM - 45MM SPACE BETWEEN INSIDE OF HANDLE AND THE DOOR FACE & A MIN 20MM CRANKED (CURVED) END ON THE HANDLE
- MIN 530MM CLEARANCE FROM ADJOINING WALL SKIRTING TO LATCH SIDE OF ALL DOORS (EXCLUDES OOA BEDROOM, BATHROOM & UTILITY AREAS)

- #### 4. INTERNAL CORRIDORS

- CONTRAST COLOUR (MIN 30% CONTRAST) PAINT TO ALL INTERNAL & INSIDE OF EXTERNAL DOOR FRAMES / ARCHITRAVES (MIN 50MM WIDE)
- POWER AND CONTROL CABLEING TO HEAD OF ALL INTERNAL PARTICIPANT BEDROOM DOORS - INSIDE HINGED SIDE ABOVE THE DOOR
- MIN CLEAR WIDTH OF 1200MM MEASURED SKIRTING TO SKIRTING

- ## 5. WINDOWS - SLIDING DOORS

- ALL WINDOW SILLS TO THE PARTICIPANT BEDROOMS AND LIVING AREA WINDOWS TO BE
MAX 1000MM AFFL (EXCLUDES KITCHEN, BATHROOMS & UTILITY AREAS)
ALL WINDOW CONTROLS / LOCKS TO THE PARTICIPANT BEDROOMS AND LIVING AREA
WINDOWS TO BE OPERABLE FROM A SEATED POSITION - MAX 1100MM AFFL (BETWEEN 600MM -
1100MM (EXCLUDES KITCHEN, BATHROOMS & UTILITY AREAS)
ALL WINDOWS TO BE KEY LOCKED
STEP FREE LEVEL TRANSITION TO ALL DOORWAYS WITH **MAX** 3MM (SQUARE EDGE) OR
5MM (ROUNDED EDGE) IF HEIGHT DIFFERENCE REQUIRED
CLEAR OPENING OF 950MM MIN WHEN DOOR OPEN AT 90 DEGREE ANGLE TO THE
JAMB
POWER AND CONTROL CABLING TO ONE SIDE OF EACH WINDOW TO PARTICIPANT
BEDROOMS & LIVING ROOMS (EXCLUDES KITCHEN, BATHROOMS & UTILITY AREAS)

- ## 6. SANITARY ROOMS

- MIN CLEAR CIRCULATION SPACE OF THE SHOWER RECESS OF 1600MM WIDE X 2500MM DEEP - CLEAR OF SWING DOOR, & BASIN
 - MIN CLEAR CIRCULATION SPACE OF THE VANITY BASIN OF 850MM WIDE X 1500MM DEEP
 - CLEAR OF SWING DOOR AND SHOWER FIXTURES
 - MIN CLEAR CIRCULATION SPACE IMMEDIATELY FORWARD OF THE PAN OF 1900MM WIDE X 2300MM LONG - CLEAR OF SWING DOOR, BASIN AND SHOWER FIXTURES
 - TOILET SEAT TO BE BETWEEN 460MM - 480MM AFFL AND 450MM - 460MM FROM THE SIDE WALL TO THE CENTRE OF THE TOILET PAN AND 790MM - 810MM FROM THE REAR WALL TO THE FRONT OF THE PAN
 - TOILET SEAT TO BE CONTRASTING COLOUR TO THE PAN AND CISTERN
 - TOILET FLUSHING CONTROLS TO BE PROUD OF THE CISTERN SURFACE
 - MIN 300MM LUX TASK LIGHTING ABOVE ALL WORKSPACES - VANITY SINKS (DOWN LIGHTS ABOVE SINK)
 - STEP FREE, HOBLESS SHOWER (**MAX** 3MM (SQUARE EDGE) OR 5MM (ROUNDED EDGE) STEP - IF REQUIRED)
 - SHOWER ROSE AND TAP TO BE ON REAR WALL OF SHOWER RECESS - REFER A.S. 1428.1
- PAGE FOR SETOUT MEASUREMENTS
- 1X VERTICAL SHOWER SUPPORT GRAB RAIL TO BE INSTALLED IN SHOWER WALL - AS RAIL FOR SHOWER HEAD - 580MM - 600MM FROM THE INTERNAL CORNER, 900MM - 1100MM TO THE BOTTOM OF THE RAIL & 1880MM - 1900MM TO THE TOP OF THE RAIL

- SHOWER CURTAIN TO PARTICIPANT SHOWER RECESS (1160MM X 1100MM) - CURTAIN RAIL MIN 2000MM AFFL
- LEVER STYLE MIXER TAP LOCATED BETWEEN 900MM - 1100MM AFFL AND 300MM - 800MM FROM THE INTERNAL CORNER
 - SHOWER HEAD WATER OUTLET TO BE 700MM AFFL (695MM - 705MM) TO THE CENTRE - NO SPECIFIC MEASUREMENT FROM THE INTERNAL CORNER
 - FLOOR GRADIENT 1:80 GRADE (1.25% GRADE) MAX/MIN TO THE ENTIRE FLOOR - ALTERNATIVELY 1:60 - 1:80 GRADE TO SHOWER RECESS & 1:80 - 1:100 GRADE TO THE REMAINDER OF THE ENSUITE
 - WASH BASIN TO BE MAX 830MM AFFL TO THE TOP LIP OF THE BASIN
 - MIN BASIN DEPTH 430MM & MIN CIRCULATION SPACE UNDER THE BASIN FOR 850MM WIDTH - CENTRED ON BASIN
 - LEVER TAPWARE TO VANITY SINKS ALL OPERABLE PARTS (HANDLE & SPOUT) TO BE WITHIN 300MM OF THE FRONT OF THE BENCH - MEASURED THROUGH MOVEMENT ARC
 - P3 / R10 CERTIFIED SLIP RESISTANCE TO ALL ENSUITE FLOORS
 - 12MM STRUCTURAL PLY TO THE ENTIRE PARTICIPANT ENSUITE WALLS SURROUNDING THE TOILET, SHOWER AND BATHROOM (ENSUITE 1,2,3)
 - PROVIDE IN-USE SNIB LOCKS WITH 4500 LATCH LEVER TO POWDER ROOM & ENSUITE 1

- ## 7. KITCHEN

- FLOOR FINISHES (VINYL) TO EXTEND UNDER THE 2X KITCHEN REMOVABLE CUPBOARDS TO ENABLE EASY ADAPTATION
- MIN 1550MM CLEARANCE IN FRONT OF ALL BENCHES / FIXED APPLIANCES (OUTERMOST BENCH EDGE - NOT HANDLE) APPLIANCES ASSUMED 700MM DEEP
 - MIN 300MM LUX TASK LIGHTING ABOVE ALL WORKSPACES IN KITCHEN (INCLUDING HEIGHT ADJUSTABLE BENCH), LAUNDRY BENCH AND VANITY SINKS (DOWN LIGHTS @ 1200MM CENTRES MIN)
 - FREESTANDING HEIGHT ADJUSTABLE MOVABLE BENCH (HEIGHT RANGE 720MM CLEAR UNDERNEATH - 1020MM UNDERNEATH)
 - D PULL HANDLES TO ALL CUPBOARD DOORS, CUPBOARD DRAWERS AND OVER HEAD CUPBOARD DOORS - 35MM SPACE BEHIND OR 20MM OVERHANGING DOOR LIP - TO OVERHEAD CUPBOARDS ONLY
 - OVEN TO BE SIDE HINGED DOOR - PART OF DOOR HANDLE LOCATED BETWEEN 600MM TO 1100MM AFFL
 - OVEN TO HAVE A MIN 1X TELESCOPIC SHELF (NON-REMOVABLE)
 - ELECTRIC CERAMIC COOKTOP WITH KNOB OR TOUCH CONTROLS TO THE FRONT LOCATED MIN 300MM FROM INTERNAL CORNER OR WALL
 - REMOVABLE CUPBOARD (ACCESSIBLE BENCHTOP) SECTION TO THE BENCH BETWEEN THE OVEN TOWER AND THE COOKTOP - MIN 900MM WIDE X 440MM DEEP WITH 720MM CLEAR SPACE UNDER - ACCESSIBLE FROM A SEATED POSITION
 - REMOVABLE CUPBOARD SECTION TO THE BENCH UNDER THE KITCHEN SINK - MIN 900MM WIDE X 440MM DEEP WITH 720MM CLEAR SPACE UNDER - ACCESSIBLE FROM A SEATED POSITION
 - STONE BENCH SPACES TO BE MIN 600MM DEEP - CLEAR OF SPLASH TILES AND POWER POINTS (MIN 630MM STONE SLAB)
 - LEVER TAPWARE TO THE KITCHEN SINK, LAUNDRY SINK, VANITY SINKS ALL OPERABLE PARTS (HANDLE & SPOUT) TO BE WITHIN 300MM OF THE FRONT OF THE BENCH - MEASURED THROUGH MOVEMENT ARC
 - 1X DOUBLE POWER POINT (35MM ROCKER ACTION), WITHIN 300MM OF THE FRONT EDGE OF THE KITCHEN BENCH MAX 1100MM AFL LOCATED ADJACENT TO MIN 600MM DEEP BENCHTOP
 - DRAWER STYLE DISHWASHER
 - PANTRY CUPBOARD TO HAVE BASKET TYPE PULL OUT SHELVES
 - P3 / R10 CERTIFIED SLIP RESISTANCE TO KITCHEN FLOORS

- ## 8. LAUNDRY

- MIN 1550MM CLEARANCE IN FRONT OF ALL BENCHES / FIXED APPLIANCES (OUTERMOST BENCH EDGE - NOT HANDLE) APPLIANCES ASSUMED 700MM DEEP
- MIN 300MM LUX TASK LIGHTING ABOVE ALL WORKSPACES - LAUNDRY (DOWN LIGHTS ABOVE BENCH)
- D PULL HANDLES TO ALL CUPBOARD DOORS, CUPBOARD DRAWERS AND OVERHEAD CUPBOARD DOORS - 35MM SPACE BEHIND OR 20MM OVERHANGING DOOR LIP - TO OVERHEAD CUPBOARDS ONLY
- STEP FREE LEVEL TRANSITION TO ALL DOORWAYS WITH **MAX** 3MM (SQUARE EDGE) OR 5MM (ROUNDED EDGE) IF HEIGHT DIFFERENCE REQUIRED
- CLEAR OPENING OF 950MM MIN WHEN DOOR OPEN AT 90 DEGREE ANGLE TO THE JAMB
- LEVER TAPWARE TO THE LAUNDRY SINK ALL OPERABLE PARTS (HANDLE & SPOUT) TO BE WITHIN 300MM OF THE FRONT OF THE BENCH - MEASURED THROUGH MOVEMENT ARC
- P3 / R10 CERTIFIED SLIP RESISTANCE TO LAUNDRY FLOORS

- ## 9. BEDROOMS

- CLEAR OPENING OF 950MM MIN WHEN DOOR OPEN AT 90 DEGREE ANGLE TO THE
- | | |
|------|--|
| JAMB | |
| · | P3 / R10 CERTIFIED SLIP RESISTANCE TO BEDROOM FLOORS |
| · | BEDROOMS MIN SIZES MEASURED TO WALLS (NOT SKIRTING) |
| · | 1400MM MIN INTERNAL ROBE MEASUREMENT |
| · | QUEEN BED SIZE 1530MM WIDE X 2100MM MIN |
| · | MIN 1540MM DISTANCE TO ROBE FACE OR AT LEAST 1X WALL (WHERE NO ROBE) & MIN 1000MM TO THE OTHER 2X SIDES OF THE BED - MEASURED FROM THE WALL SURFACE TO THE EDGE OF THE BED |
| · | MIN DOOR CIRCULATION SPACE OF THE BEDROOM DOOR (INTERNALLY) IS 1540MM WIDE X 1450MM DEPTH (CLEAR OF THE BED) |
| · | 3X DOUBLE POWER POINTS ON THE HEAD OF THE BED WALL & 1X DOUBLE POWER POINT ON THE WALL OPPOSITE THE BED HEAD |

- ## 10. LIVING ROOMS

- FAMILY / LIVING ROOM MIN CIRCULATION SPACE OF 2250MM DIAMETER CIRCLE

- ## 11. SWITCHES AND POWER POINTS

- LIGHT SWITCHES (35MM ROCKER ACTION), AC CONTROLS, FAN CONTROLS, VIDEO INTERCOM SCREENS ALL TO BE 1050MM AFFL (900MM - 1100MM)
- POWER POINTS (35MM ROCKER ACTION), NBN CONNECTION, USB CONNECTION, TV POINTS, EMERGENCY POWER POINTS (35MM ROCKER ACTION TO BE EITHER 700MM OR 900MM TO CENTRE OF PLATE (BETWEEN 600- 900) & 500MM TO ANY INTERNAL CORNER
- SINGLE POWER POINT (STD PLATE) ON EMERGENCY BATTERY CIRCUIT TO BE ABOVE INTERNAL HINGED SIDE OF PARTICIPANT BEDROOM ENTRY DOOR, FRONT ENTRY DOOR, LAUNDRY DOOR (INTERNAL & EXTERNAL DOORS), GARAGE INTERNAL DOOR AND ALL GLASS SLIDING DOORS
- SINGLE POWER POINT (STD PLATE) ON MAINS CIRCUIT TO BE ABOVE EITHER SIDE OF THE PARTICIPANT BEDROOM WINDOWS, ALL LIVING AREA WINDOWS (EXCLUDES WET AREAS AND KITCHEN)
- SINGLE POWER POINT (STD PLATE) ON MAINS CIRCUIT TO THE CEILING OF THE PARTICIPANTS BEDROOM (FOR FUTURE HOIST)
- DIMMER CONTROL (ROTARY) SWITCHES TO ALL PARTICIPANTS BEDROOMS, LIVING AREAS LIGHTS LEVEL WITH DOOR HANDLE

- ## 12. FLOORING AND SLIP RESISTANCE

- P3 / R10 CERTIFIED SLIP RESISTANCE TO ALL INTERNAL FLOOR SURFACES (KITCHEN, LAUNDRY, BEDROOMS, WET AREAS, MAIN FLOOR)
- EVEN, FIRM P4 / R11 SLIP RESISTANT SURFACE TO THE WALKWAYS, LANDINGS AND RAMPS OF THE DWELLING ACCESS & ACCESSIBLE PATH OF TRAVEL & GARAGE FLOOR

- 13. INTERNAL STAIRS - NOT APPLICABLE**

- 14. USE OF LIFTS - NOT APPLICABLE**

- ## 15. COMMON USE AREAS POS AND LANDSCAPING

- LETTERBOXES ARE TO BE LOCKABLE, BE ON 1540MM X 2070MM HARDSTAND WITH A MAX GRADE IN ANY DIRECTION OF 1:40 (2.5% GRADE) ACCESSED BY CONTINUOUS PATH, LETTERBOX 600MM - 1100MM AFFL

- ## 16. STORAGE

- MIN 600MM WIDTH STORAGE CUPBOARD WITH ADJUSTABLE SHELVING

- 17. BREAKOUT ROOM - NOT APPLICABLE**

- ## 18. LUMINANCE CONTRAST REQUIREMENTS

- CONTRAST COLOUR (MIN 30% CONTRAST) PAINT TO ALL INTERNAL & INSIDE OF EXTERNAL DOOR FRAMES / ARCHITRAVES (MIN 50MM WIDE)
- SOLID - NON-TRANSLUCENT GLAZING STRIP 75MM WIDE BETWEEN 900 - 1000MM AFFL TO FULL WIDTH OF THE SLIDING GLASS DOORS
- TOILET SEAT MIN 30% CONTRAST TO THE PAN, WALL OR FLOOR
- WALL TO FLOOR MIN 30% CONTRAST

- ## 19. CEILING HOISTS

- SINGLE POWER POINT (STD PLATE) ON MAINS CIRCUIT TO THE CEILING OF THE PARTICIPANTS BEDROOM (FOR FUTURE HOIST)
- 240MM X 45MM WALL FIXED BEAMS TO EACH SIDE OF THE PARTICIPANTS BEDROOM - AS PER ENGINEERS CERTIFIED DETAIL (FOR FUTURE HOIST)
- PROVISION TO SUIT HOIST THAT IS ABLE TO GO UP/DOWN THE BED AS WELL AS SIDE TO SIDE - MIN LOAD CAPACITY OF 250KG

- ## 20. HEATING AND COOLING

- A/C CONTROLS, FAN CONTROLS ALL TO BE 1050MM AFFL (900MM - 1100MM) & MIN 500MM FROM ANY INTERNAL CORNER
- ALL SPLIT SYSTEM UNITS TO BE REVERSE CYCLE AND PLACED APPROX 300MM FROM THE TRUSS BOTTOM CHORD TO THE TOP OF THE EVAPORATOR UNIT TO ACCOMMODATE BEAM
- DUCTED A/C REQUIRED ZONING TO HABITABLE ROOMS

- ## 21. EMERGENCY POWER SOLUTIONS

- BATTERY UPS EMERGENCY POWER CIRCUIT TO CATER FOR A MIN 2HOUR POWER OUTAGE - MIN 2X
- DOUBLE POWER POINTS TO BEDROOMS AND ALL AUTOMATED DOOR USED FOR ENTRY AND EGRESS

- ## 22. ASSISTIVE TECHNOLOGY

- HI SPEED, STABLE INTERNET COVERAGE BY WIFI ROUTER NETGEAR NIGHTHAWK 8 STREAM AX8 STREAM AX6600 TRIBAND WIFI (SPEED UP TO 4.8 GBPS 6 600MBPS) 20M COVERAGE OR EQUAL, LOCATED IN THE GARAGE AND COVERAGE TO ENTIRE HOME
- VIDEO INTERCOM SCREENS (TABLET TYPE) ALL TO BE 1050MM AFFL (900MM - 1100MM)
- VIDEO INTERCOM WITH TABLET SCREENS TO EACH BEDROOM (INCLUDING OOA) AND CAMERA / DOORBELL TO FRONT DOOR EXTERNAL WALL

- ## 23. FIRE SAFETY

- SMOKE ALARMS TO BEDROOM AND LIVING SPACES WITH VISUAL AS WELL AS AUDITORY
- ALARM
- EMERGENCY FIRE EVACUATION PLAN PROVIDED TO OCCUPANTS
- EVACUATION LIGHT SIGNS TO HALLWAYS

- 24. ROBUST DESIGN - NOT APPLICABLE**

PLANS AND DOCUMENTS
referred to in the PDA
DEVELOPMENT APPROVAL

Approval no: DEV2025/1597
Date: 1 April 2025




	TELEPHONE 0756448644	© Silkwood Homes. The copyright of these plans are owned by Silkwood Homes. The plans may not be reproduced, copied or dealt with in any manner which infringes the exclusive rights of Silkwood Homes.	I/ WE APPROVE THESE DRAWINGS TO BE CORRECT AS PER CONTRACT	Issue	Date	Drawn	Amendments	CLIENT: CJM AUSTRALIA PTY LTD ATF THE CJM FAMILY TRUST AT: LOT 8235 #26, NAPIER CRESCENT BANYA, QLD 4551	Facade:	Title: ADDITIONAL NOTES	Issue: F	Scale: AS SHOWN
	WEBSITE: www.silkwoodhomes.com.au			B	12.12.2024	SP	CONTRACT PLAN		PLANTATION			
	QLD LICENSE #:1218048 ABN 65767966			C	03.02.2025	PP	WORKING DRAWINGS					
	NSW LICENSE #: 248052C ABN 14156406352			D	17.02.2025	MB	PERFORMANCE SOL.					
	UNIT 4/13 INDY COURT			E	21.02.2025	MB	BA SET					
	NERANG, QLD 4211 AUSTRALIA			F	20.03.2025	MB	PLAN UPDATES					
							PACIFIC 230	03	N2	Drawn By: PP		
										Checked By: MB		

 NBN PIT

Issue: F	Scale: AS SHOWN
	Plot Date: 20/03/2025
Wind Rating: N2	Drawn By: PP
	Checked By: MB



Date: 1 April 2025

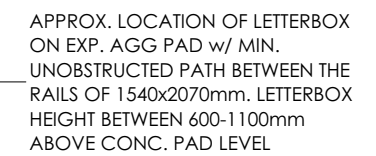

MAX. 1:40 FALL IN ANY DIRECTION TO LANDINGS


NOTE:- PROVIDE LETTERBOX;

- SITUATED ON A HARD STANDING AREA OF 1540x2070mm AND HAVE A GRADIENT AND CROSSFALL DIRECTLY IN FRONT WHICH IS LESS THAN 1:40 IN ANY DIRECTION,
- SHALL HAVE WHEELCHAIR ACCESS BY A CONTINUOUS ACCESSIBLE PATH OF TRAVEL FROM THE DWELLING TO THE LETTERBOX,
- SHALL BE LOCKABLE,
- THE HEIGHT OF THE LETTERBOX SHALL BE BETWEEN 600mm AND 1100mm ABOVE FFL.

NOTE:- PROVIDE A SAFE, CONTINUOUS STEP-FREE ACCESSWAY TO BE PROVIDED FROM THE FRONT BOUNDARY OF THE SITE TO AN ENTRY DOORWAY OF THE DWELLING WITH GRADIENT OF:

- 1:21 IN DIRECTION OF TRAVEL & 1:40 ACROSS PATH GRADIENT WITH KERB RAILS TO BOTH SIDES**
- CLEAR WIDTH 1200mm**
- LANDING AS PER A1428.1**

NOTE:
EXTERNAL HARD STAND AREAS
(CONCRETE) TO HAVE MAX 1:40
GRADIENT. 1:21 IN DIRECTION OF TRAVEL
& 1:40 ACROSS THE DIRECTION OF TRAVEL

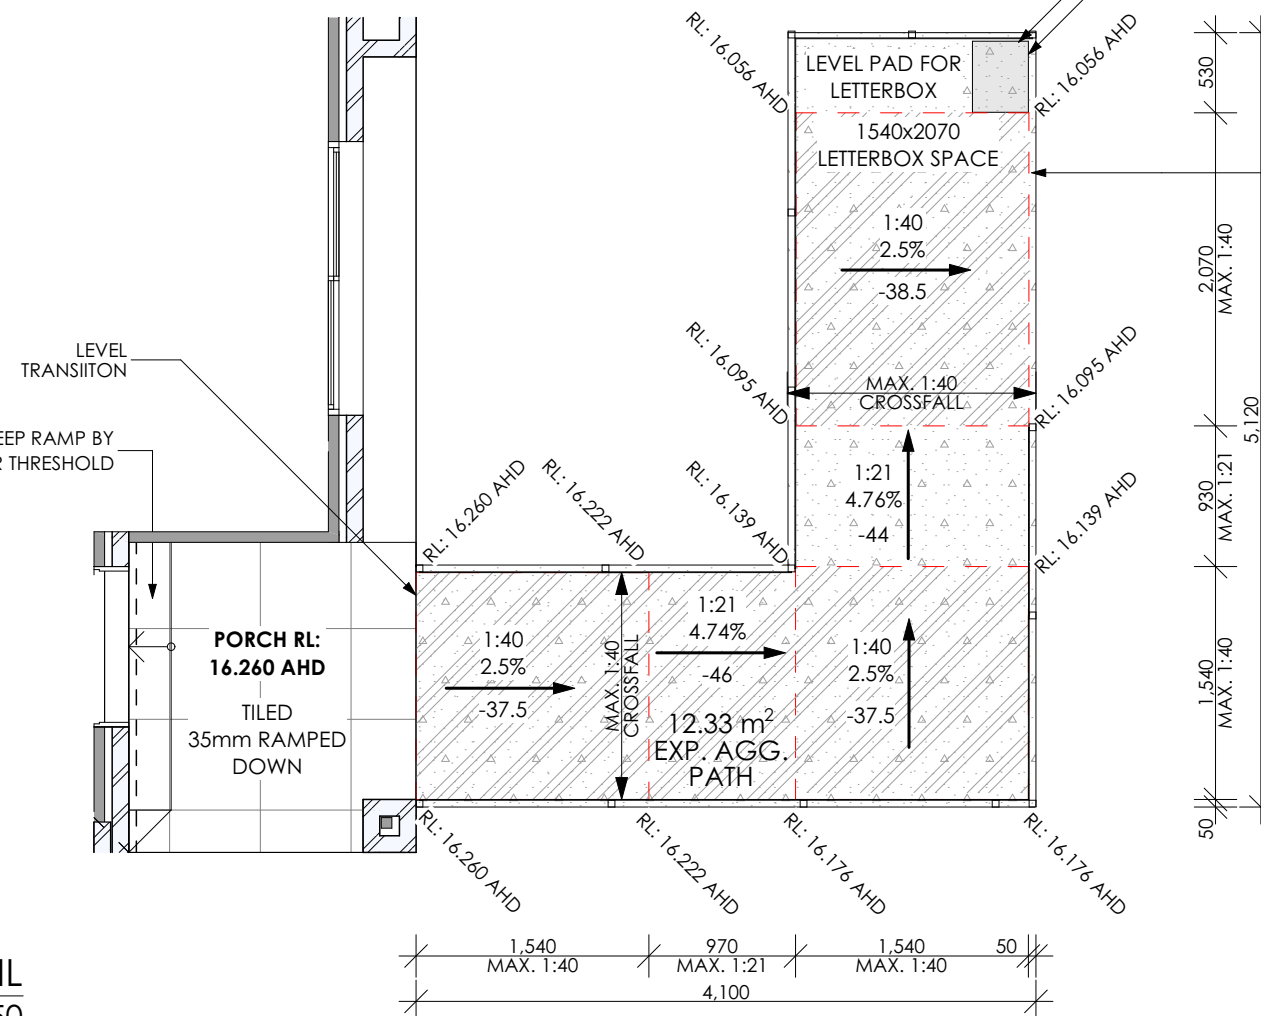


	TELEPHONE 0756448644	© Silkwood Homes. The copyright of these plans are owned by Silkwood Homes. The plans may not be reproduced, copied or dealt with in any manner which infringes the exclusive rights of Silkwood Homes.	I/ WE APPROVE THESE DRAWINGS TO BE CORRECT AS PER CONTRACT	Issue	Date	Drawn	Amendments	CLIENT: CJM AUSTRALIA PTY LTD ATF THE CJM FAMILY TRUST AT: LOT 8235 #26, NAPIER CRESCENT BANYA, QLD 4551	Facade:	Title: DRIVEWAY SECTIONS	Issue:	Scale: AS SHOWN
	WEBSITE: www.silkwoodhomes.com.au		SIGNATURE _____ DATE _____	B	12.12.2024	SP	CONTRACT PLAN		F		Plot Date: 20/03/2025	
	QLD LICENSE #:1218048 ABN 65767966		SIGNATURE _____ DATE _____	C	03.02.2025	PP	WORKING DRAWINGS					
	NSW LICENSE #: 248052C ABN 14156406352			D	17.02.2025	MB	PERFORMANCE SOL.					
	UNIT 4/13 INDY COURT			E	21.02.2025	MB	BA SET					
	NERANG, QLD 4211 AUSTRALIA			F	20.03.2025	MB	PLAN UPDATES					
									Design Name:	Page:	Wind Rating:	Drawn By:
									PACIFIC 230	05	N2	PP
												Checked By:
												MB


LANDSCAPE LEGEND		
NO.	SURFACE	TYPE
1		TURF
2		S&P STONES
3		GARDEN MULCH
4		GARDEN BED EDGING
5		EXPOSED AGGREGATE
6		PLAIN CONCRETE
7		BRUSHED CONCRETE
8		COMPACTED CRUSHER DUST

LANDSCAPE AREAS	
SURFACE	AREA
GARDEN BED EDGING	3.26
GARDEN MULCH	22.29
TURF	241.75

NOTE: - LANDSCAPING PLAN AND PLANTING IS INDICATIVE ONLY; LAYOUT MAY VARY DUE TO SITE CONDITIONS.

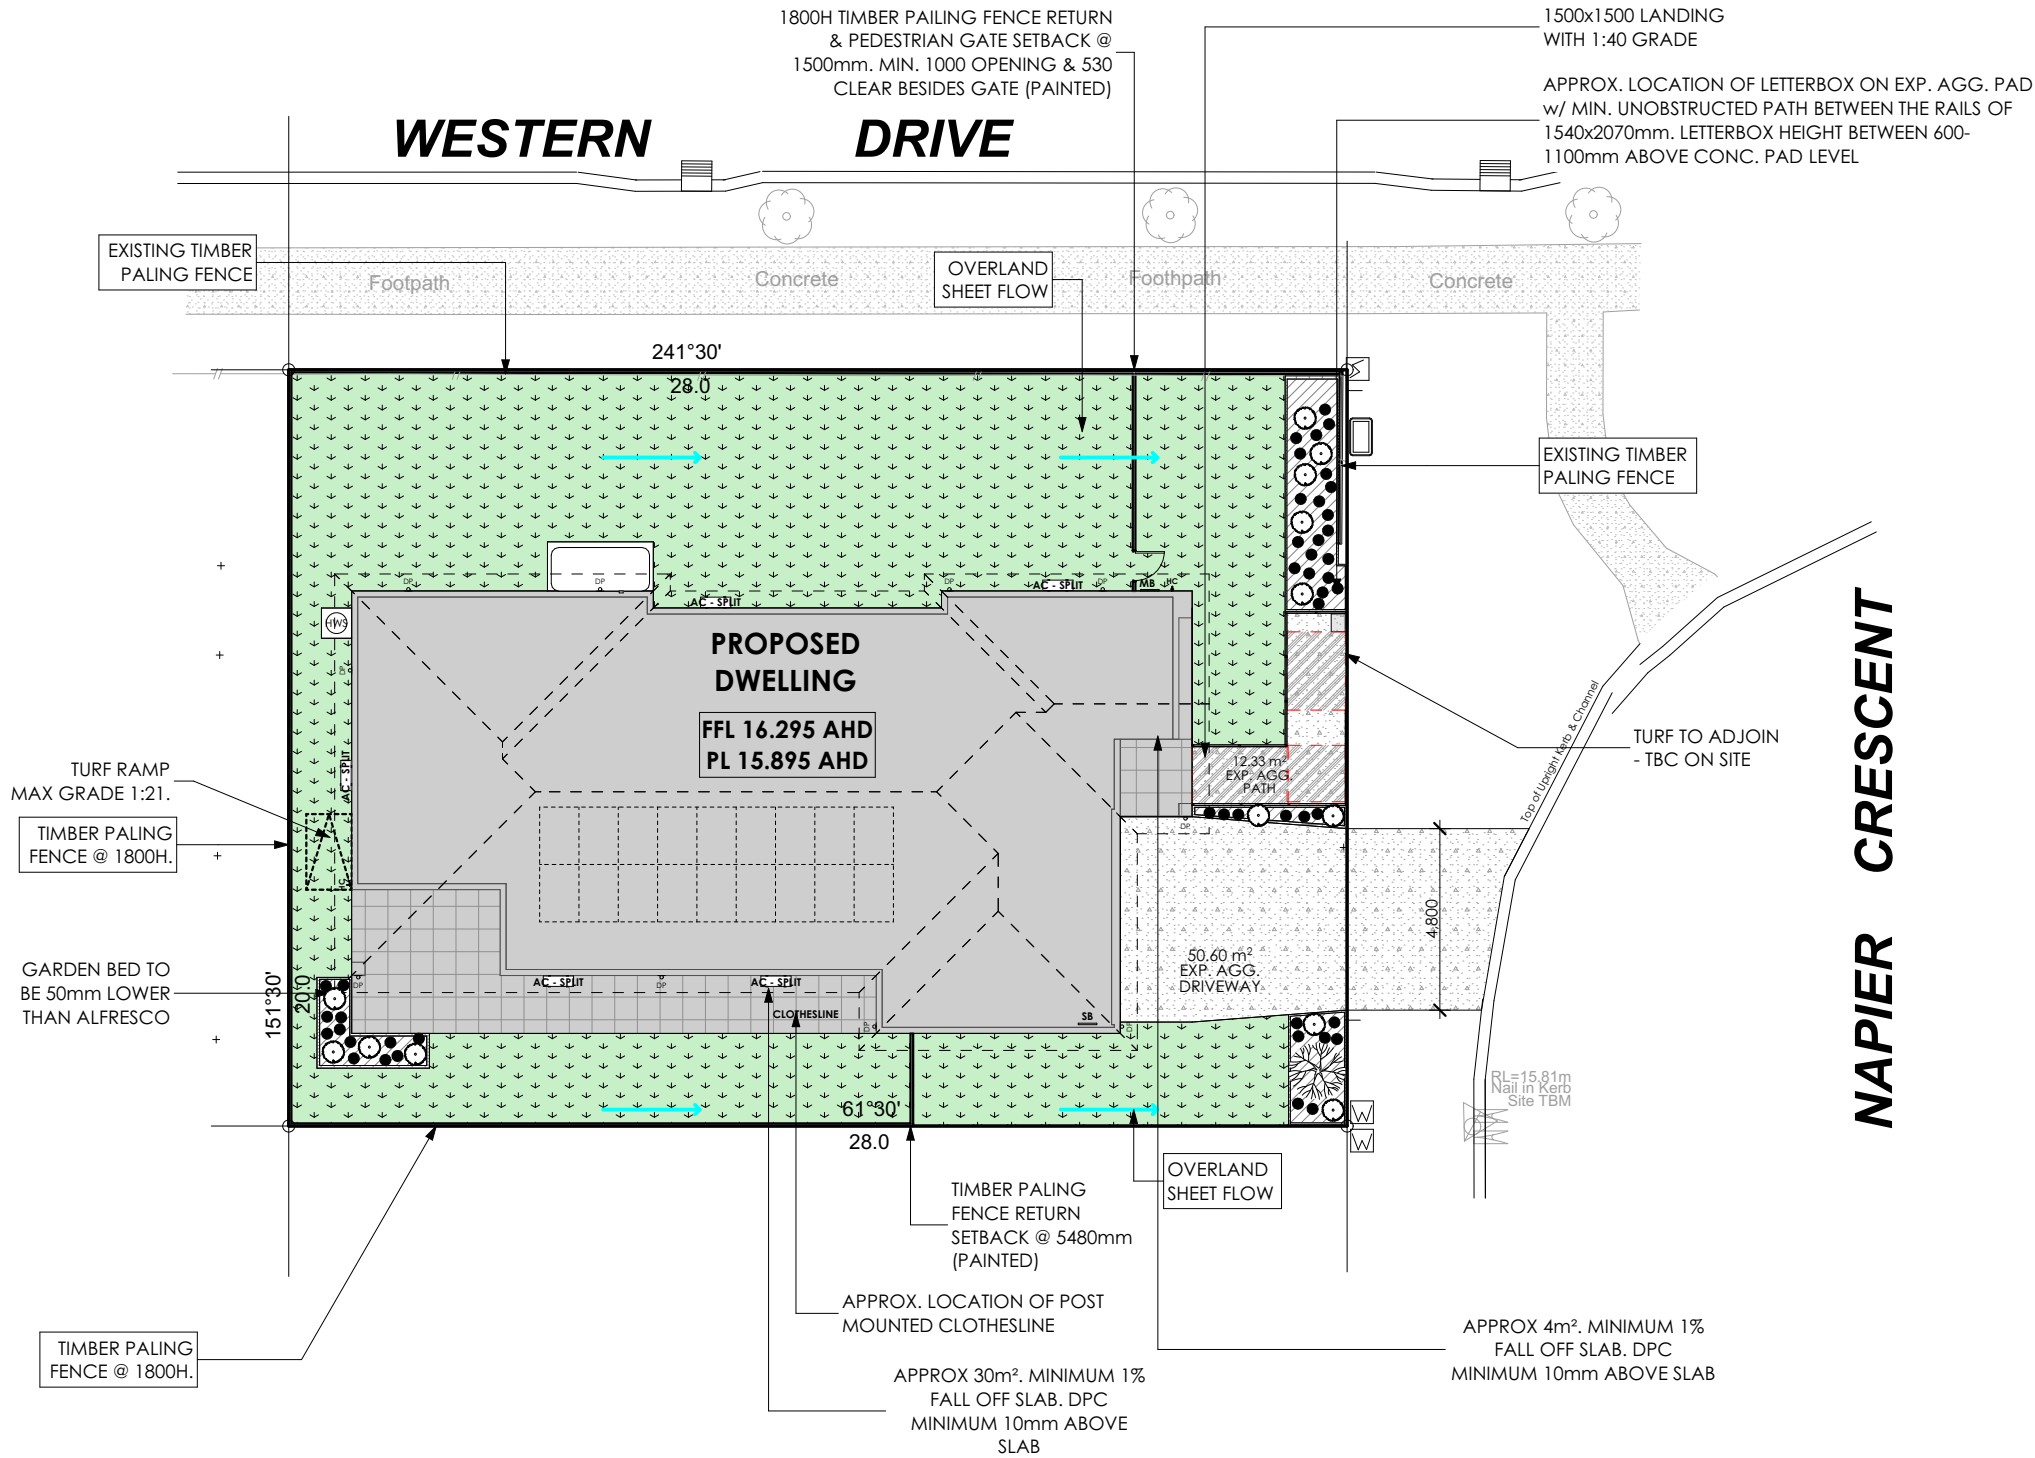

LANDSCAPE PLAN
1:200



NOTE:
EXTERNAL HARD STAND AREAS
(CONCRETE) TO HAVE MAX 1:40
GRADIENT. 1:14 IN DIRECTION OF TRAVEL
& 1:40 ACROSS THE DIRECTION OF TRAVEL

PLANS AND DOCUMENTS
referred to in the PDA
DEVELOPMENT APPROVAL

Approval no: DEV2025/1597
Date: 1 April 2025



	TELEPHONE 0756448644 WEBSITE: www.silkwoodhomes.com.au QLD LICENSE #: 1218048 ABN 65767966 NSW LICENSE #: 248052C ABN 14156406352 UNIT 4/13 INDY COURT NERANG, QLD 4211 AUSTRALIA	© Silkwood Homes. The copyright of these plans are owned by Silkwood Homes. The plans may not be reproduced, copied or dealt with in any manner which infringes the exclusive rights of Silkwood Homes.	I/ WE APPROVE THESE DRAWINGS TO BE CORRECT AS PER CONTRACT	Issue	Date	Drawn	Amendments	CLIENT: CJM AUSTRALIA PTY LTD ATF THE CJM FAMILY TRUST AT: LOT 8235 #26, NAPIER CRESCENT BANYA, QLD 4551	Facade: PLANTATION Design Name: PACIFIC 230	Title: LANDSCAPE PLAN Page: 06	Issue: F Wind Rating: N2	Scale: AS SHOWN Plot Date: 20/03/2025 Drawn By: PP Checked By: MB
				B	12.12.2024	SP	CONTRACT PLAN					
				C	03.02.2025	PP	WORKING DRAWINGS					
				D	17.02.2025	MB	PERFORMANCE SOL.					
				E	21.02.2025	MB	BA SET					
				F	20.03.2025	MB	PLAN UPDATES					


NOTES:
EAVES: 450mm UNLESS NOTED
OTHERWISE
WIND CLASS: N2
SOIL CLASS: P/M
ROOF PITCH: 25°
BAL RATING: **LOW**
ACOUSTICS: N/A
* PROVIDE EXPANSION JOINTS TO
CEILINGS WHERE REQUIRED
* PROVIDE 20mm STONE BENCHTOPS
THROUGHOUT DWELLING
* PROVIDE BARRIER SCREENS TO ALL
SLIDING GLASS DOORS & SLIDING
WINDOWS ONLY

NOTE:
15mm THICK STRUCTURAL PLYWOOD TO ENS 1 + 2

PLANS AND DOCUMENTS
referred to in the PDA
DEVELOPMENT APPROVAL


Approval no: DEV2025/1597

Date: 1 April 2025

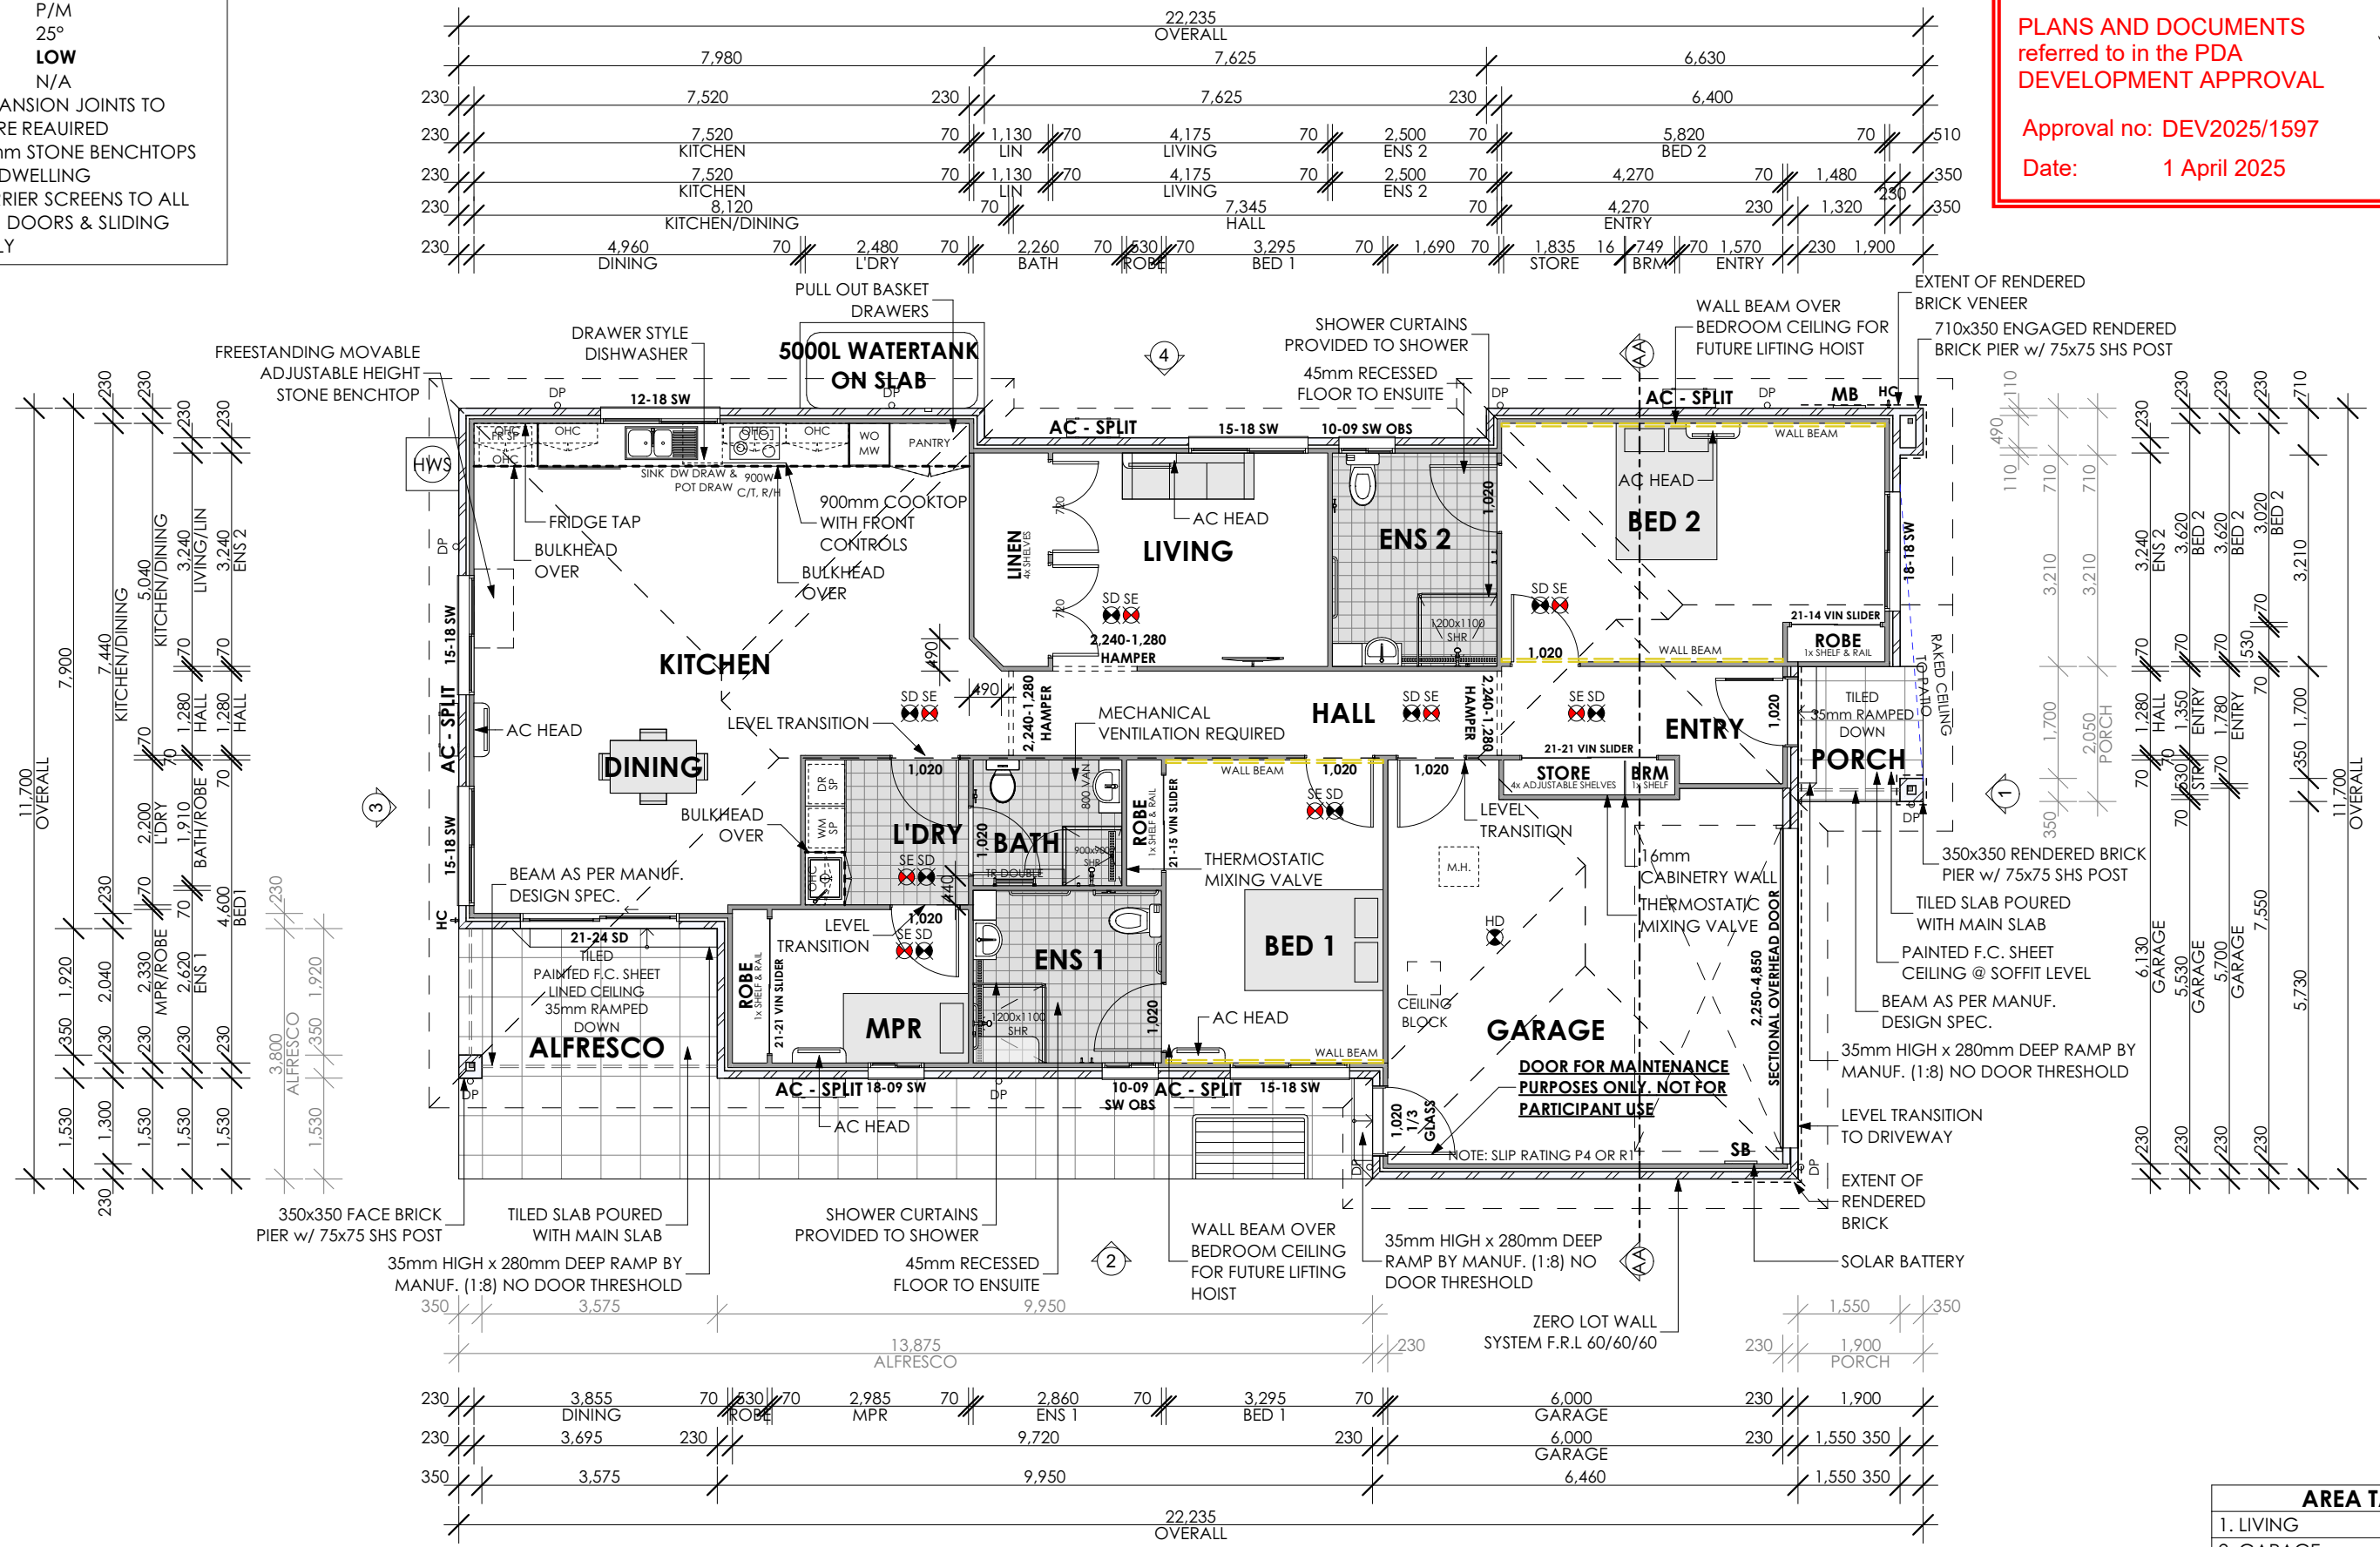


FLOOR PLAN
1:100

AREA TABLE	
1. LIVING	173.12
2. GARAGE	37.56
3. PORCH	3.90
4. ALFRESCO	30.14
244.72 m²	

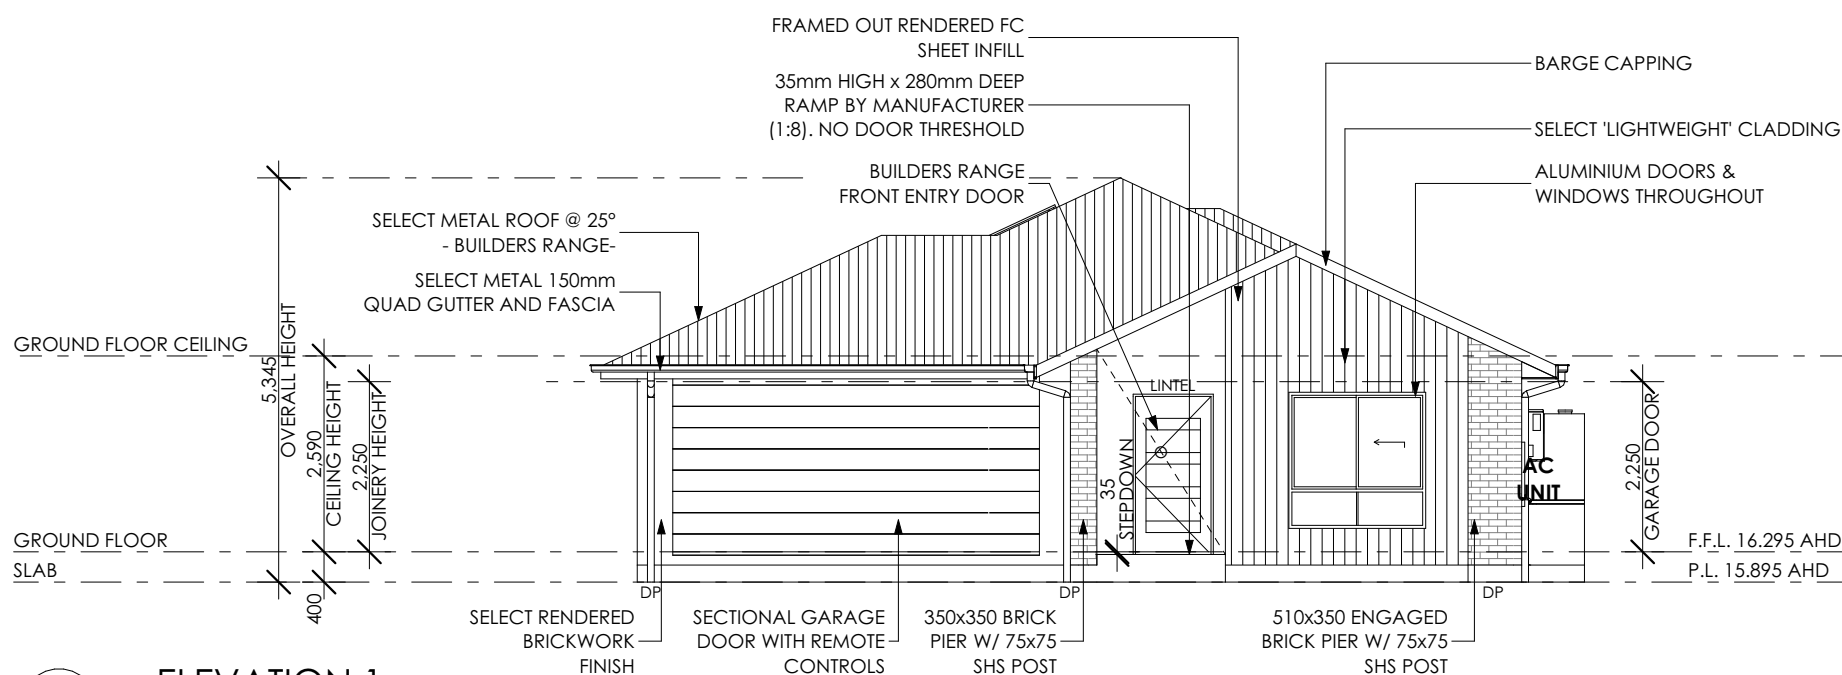

ELEVATION 1
1:100

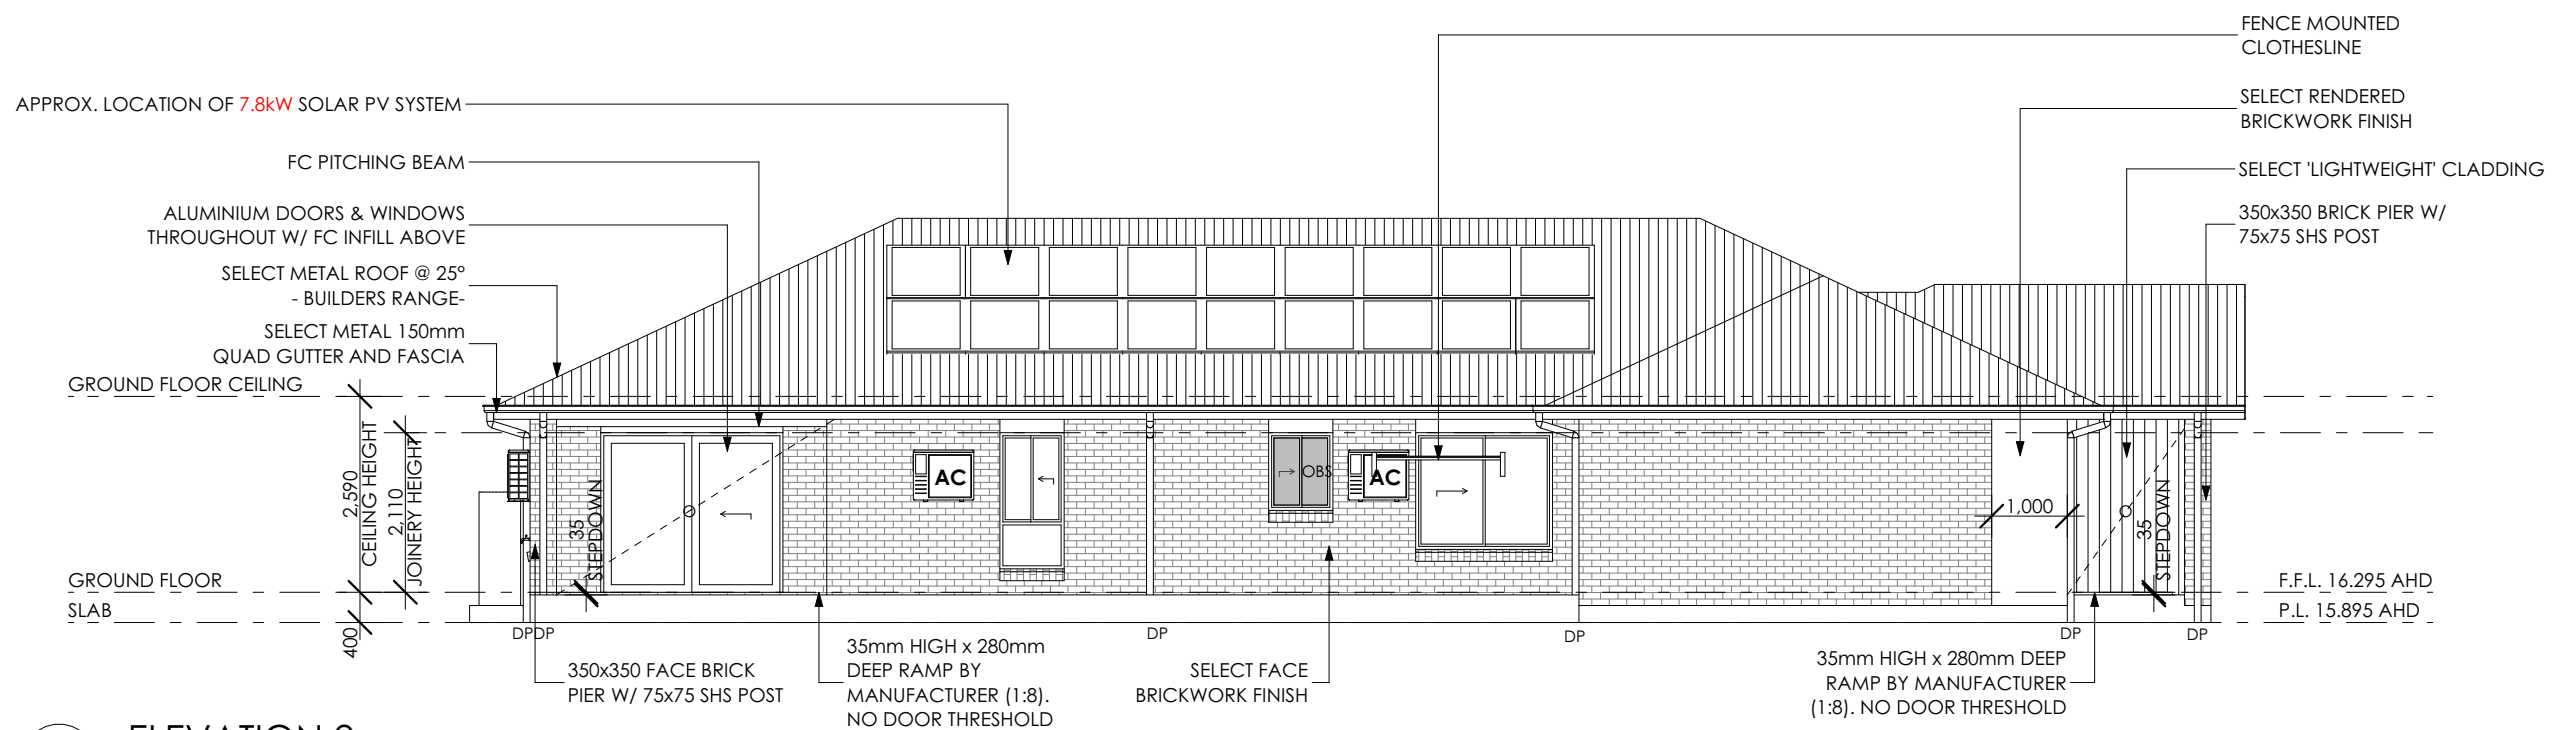

ELEVATION 2
1:100

NOTES:
EAVES: 450mm UNLESS NOTED OTHERWISE
WIND CLASS: N2
SOIL CLASS: P/M
ROOF PITCH: 25°
BAL RATING: LOW
ACOUSTICS: N/A

CLADDING KEY:
4.5mm SOFFIT
6mm FC SHEET
8.5mm EASYLAP
9mm AXON
8mm MATRIX
7.5mm BLUE BOARD
9mm PRIMELINE

NOTES:
-PROVIDE MIN 3 No. STUDS TO SIDES OF DOOR/WINDOW OPENINGS TO SUIT LIGHT WEIGHT CLADDING FIXING
-NOTE: PROVIDE 68x31 TIMBER STOPS TO ALL CORNERS TO SUIT FINISHING OF WEATHERBOARDS.
-42x42 SURROUNDS TO ALL WINDOWS IN LIGHTWEIGHT CLADDING
-42x42 SURROUNDS TO ALL GLASS SLIDING DOORS IN LIGHTWEIGHT CLADDING
-BARRIER SCREENS TO ALL SLIDING GLASS DOORS & SLIDING GLASS WINDOWS ONLY

MASONRY CONTROL JOINTS
-WHERE ARTICULATION IS BESIDE A WINDOW, IT MUST EXTEND FROM THE DAMP-PROOF COURSE, ALONG THE EDGE OF WINDOW TO THE TOP OF THE BRICKWORK OR SOFFIT
-JOINTS MUST HAVE A WIDTH OF AT LEAST 10mm AND MUST BE ADEQUATELY WEATHERPROOFED

PLANS AND DOCUMENTS
referred to in the PDA
DEVELOPMENT APPROVAL

Approval no: DEV2025/1597
Date: 1 April 2025



NOTES:

EAVES: 450mm UNLESS NOTED OTHERWISE
WIND CLASS: N2
SOIL CLASS: P/M
ROOF PITCH: 25°
BAL RATING: LOW
ACOUSTICS: N/A

CLADDING KEY:


4.5mm SOFFIT
6mm FC SHEET
8.5mm EASYLAP
9mm AXON
8mm MATRIX
7.5mm BLUE BOARD
9mm PRIMELINE

NOTES:


-PROVIDE MIN 3 No. STUDS TO SIDES OF DOOR/WINDOW OPENINGS TO SUIT LIGHT WEIGHT CLADDING FIXING
-NOTE: PROVIDE 68x31 TIMBER STOPS TO ALL CORNERS TO SUIT FINISHING OF WEATHERBOARDS.
-42x42 SURROUNDS TO ALL WINDOWS IN LIGHTWEIGHT CLADDING
-42x42 SURROUNDS TO ALL GLASS SLIDING DOORS IN LIGHTWEIGHT CLADDING
-BARRIER SCREENS TO ALL SLIDING GLASS DOORS & SLIDING GLASS WINDOWS ONLY

MASONRY CONTROL JOINTS

-WHERE ARTICULATION IS BESIDE A WINDOW, IT MUST EXTEND FROM THE DAMP-PROOF COURSE, ALONG THE EDGE OF WINDOW TO THE TOP OF THE BRICKWORK OR SOFFIT
-JOINTS MUST HAVE A WIDTH OF AT LEAST 10mm AND MUST BE ADEQUATELY WEATHERPROOFED

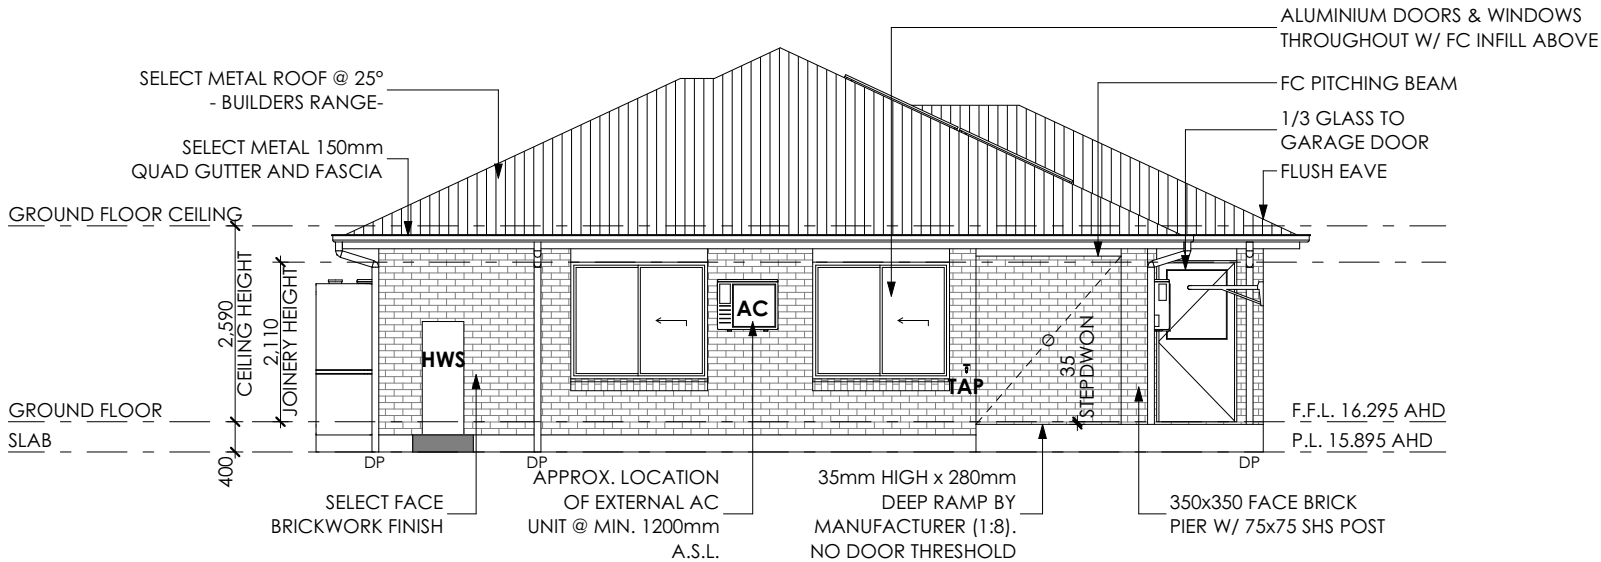

ELEVATION 3
1:100

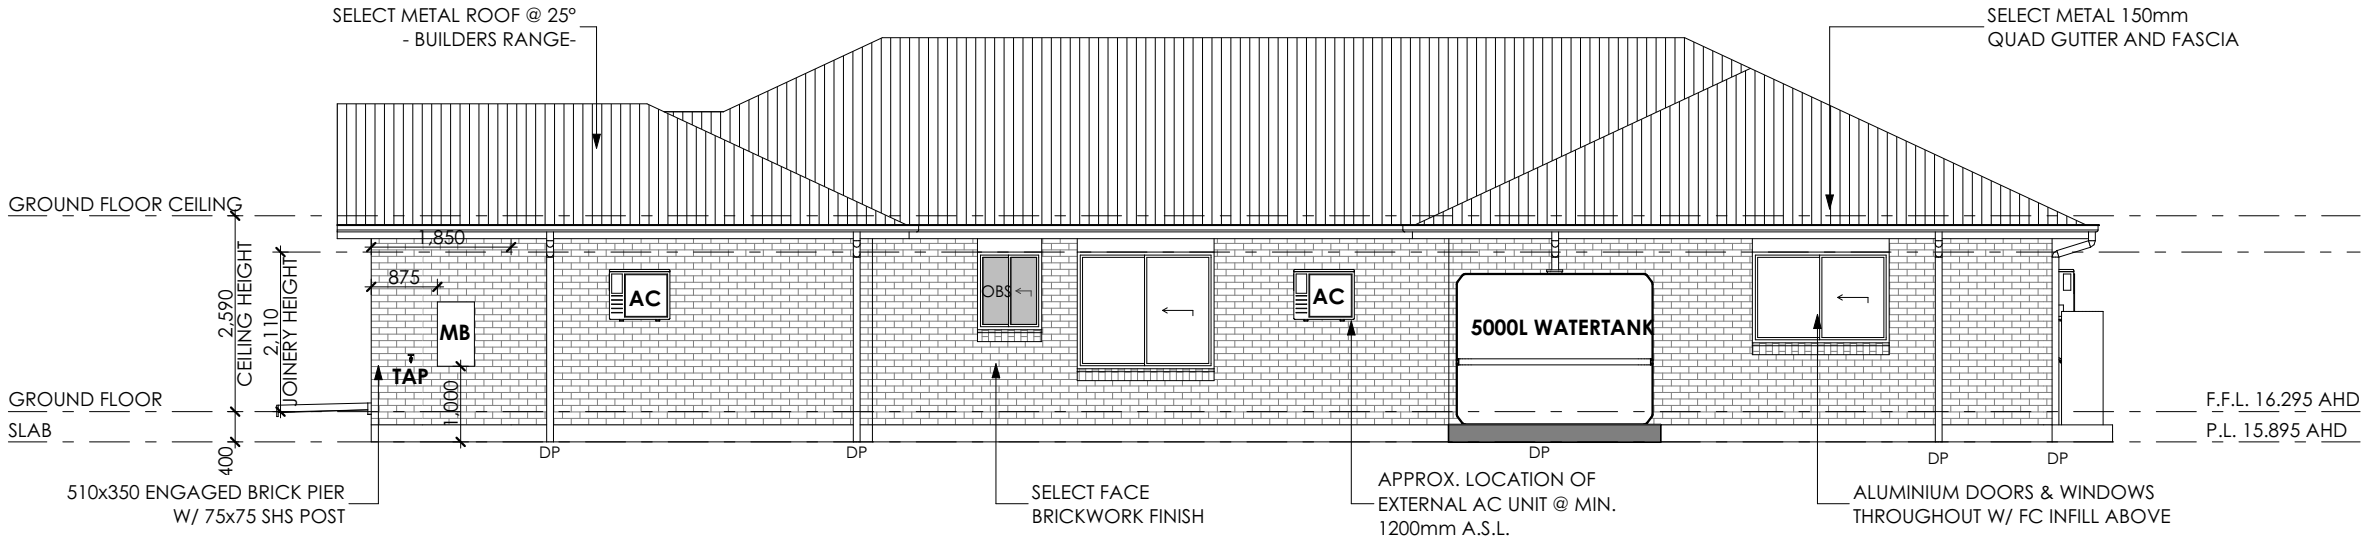

ELEVATION 4
1:100

PLANS AND DOCUMENTS
referred to in the PDA
DEVELOPMENT APPROVAL

Approval no: DEV2025/1597
Date: 1 April 2025



NOTES:
20mm STONE BENCHTOPS
THROUGHOUT HOME

ALL SKIRTING TILES TO BE @
150mm HIGH

RANGEHOODS (1500-1800mm)


VANITY PIPES: 650mm A.F.L.
KITCHEN PIPES: 750mm A.F.L.
LAUNDRY PIPES: 550mm A.F.L.
CISTERN COCK: 100mm A.F.L.

*A.F.L. - ABOVE FLOOR LEVEL


NOTE:
ALL HEIGHTS ARE MEASURED
FROM F.F.L.

NOTE:
FOR ALL FIXING HEIGHTS
REFER TO DETAILS ON PG. 22.


NOTE:
PROVIDE FALL TO FLOOR
WASTE TO
BATHROOM MINIMUM 1:80
AND MAXIMUM 1:80

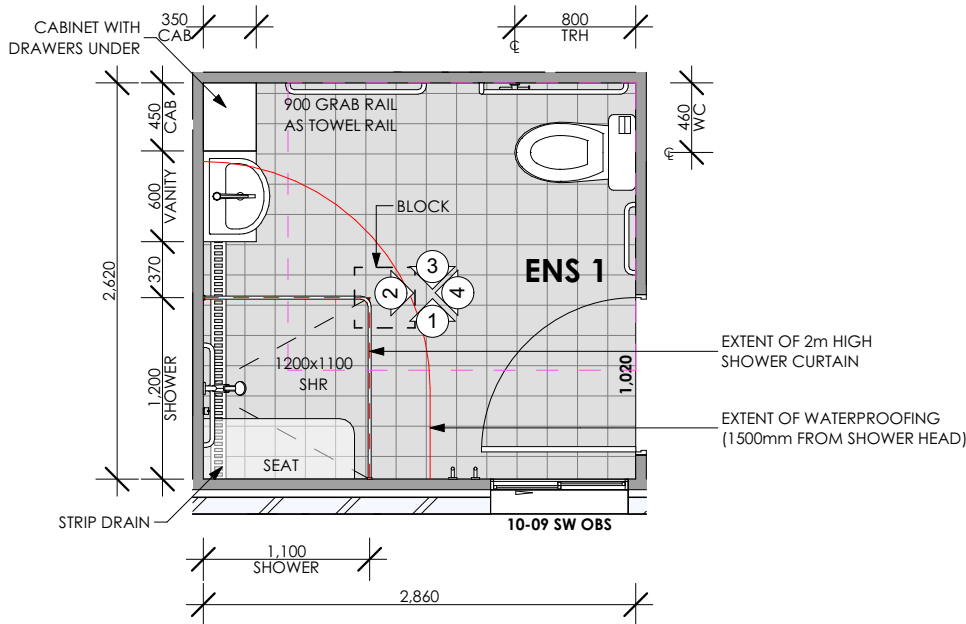


ENS 1 FLOOR PLAN
1:50

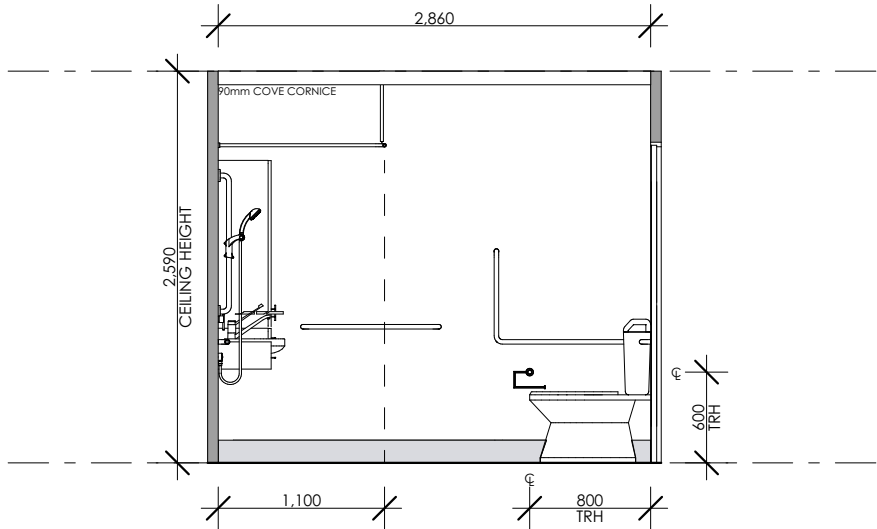


ENS 1 ELEVATION 1
1:50

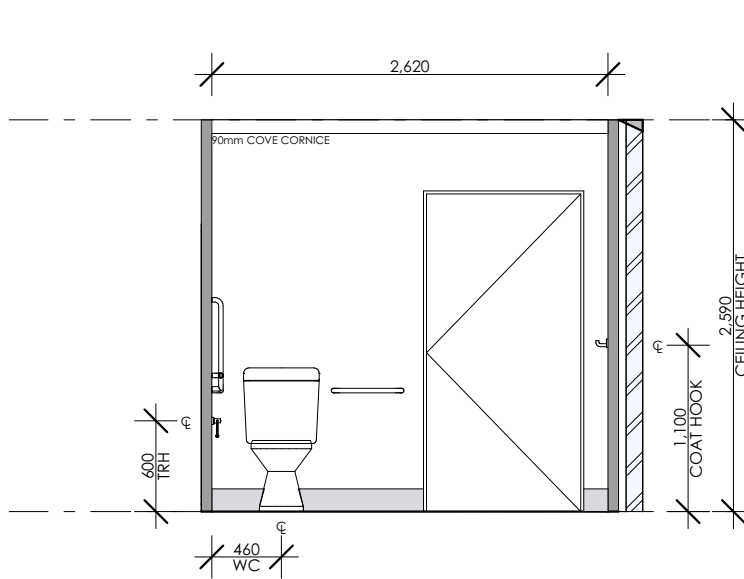

ENS 1 ELEVATION 2
1:50

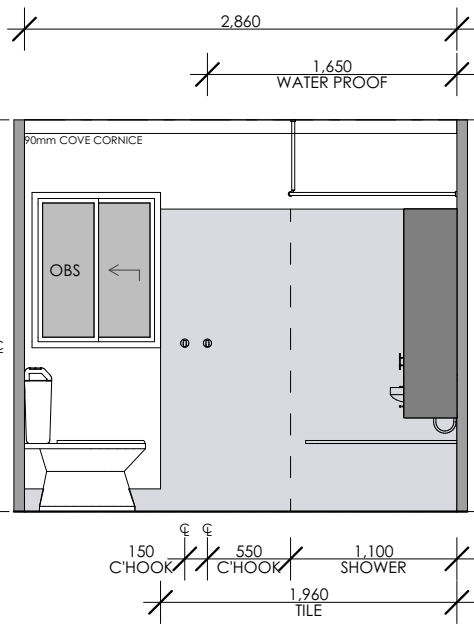

ENS 1 ELEVATION 3
1:50

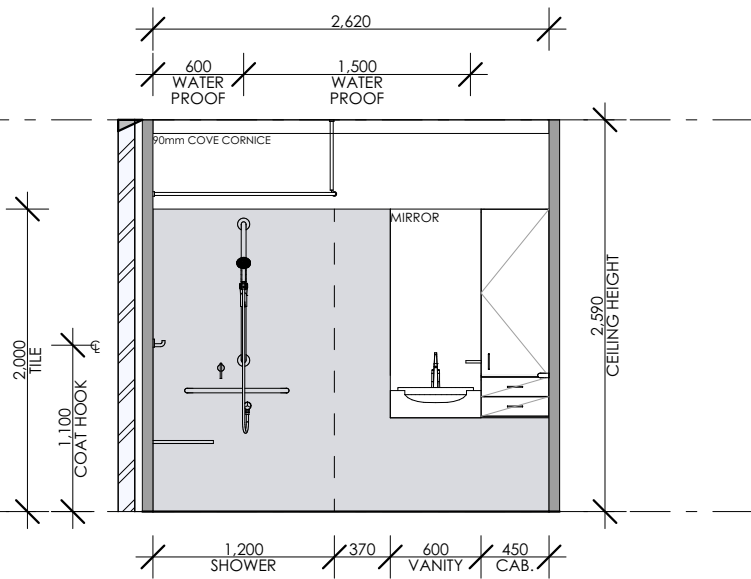

ENS 1 ELEVATION 4
1:50

PLANS AND DOCUMENTS
referred to in the PDA
DEVELOPMENT APPROVAL

Approval no: DEV2025/1597
Date: 1 April 2025



TELEPHONE 0756448644
WEBSITE: www.silkwoodhomes.com.au
QLD LICENSE #: 1218048 ABN 65767966
NSW LICENSE #: 248052C ABN 14156406352
UNIT 4/13 INDY COURT
NERANG, QLD 4211 AUSTRALIA

© Silkwood Homes. The copyright
of these plans are owned by
Silkwood Homes. The plans may
not be reproduced, copied or
dealt with in any manner which
infringes the exclusive rights of
Silkwood Homes.

I/ WE APPROVE THESE DRAWINGS TO BE CORRECT AS PER
CONTRACT
SIGNATURE _____ DATE _____
SIGNATURE _____ DATE _____

Issue	Date	Drawn	Amendments
B	12.12.2024	SP	CONTRACT PLAN
C	03.02.2025	PP	WORKING DRAWINGS
D	17.02.2025	MB	PERFORMANCE SOL.
E	21.02.2025	MB	BA SET
F	20.03.2025	MB	PLAN UPDATES

CLIENT:
CJM AUSTRALIA PTY LTD ATF THE CJM FAMILY TRUST
AT: LOT 8235 #26, NAPIER CRESCENT BANYA, QLD 4551

Facade:
PLANTATION
Design Name:
PACIFIC 230

Title:
INTERNALS
Page:
19

Issue:
F
Scale: AS SHOWN
Plot Date: 20/03/2025
Wind Rating:
N2
Drawn By:
PP
Checked By:
MB

NOTES:
20mm STONE BENCHTOPS
THROUGHOUT HOME

ALL SKIRTING TILES TO BE @
150mm HIGH

RANGEHOODS (1500-1800mm)






VANITY PIPES: 650mm A.F.L.
KITCHEN PIPES: 750mm A.F.L.
LAUNDRY PIPES: 550mm A.F.L.
CISTERN COCK: 100mm A.F.L.

*A.F.L. - ABOVE FLOOR LEVEL

NOTE:
ALL HEIGHTS ARE MEASURED
FROM F.F.L.

NOTE:
FOR ALL FIXING HEIGHTS
REFER TO DETAILS ON PG. 22.

NOTE:
PROVIDE FALL TO FLOOR
WASTE TO
BATHROOM MINIMUM 1:80
AND MAXIMUM 1:80

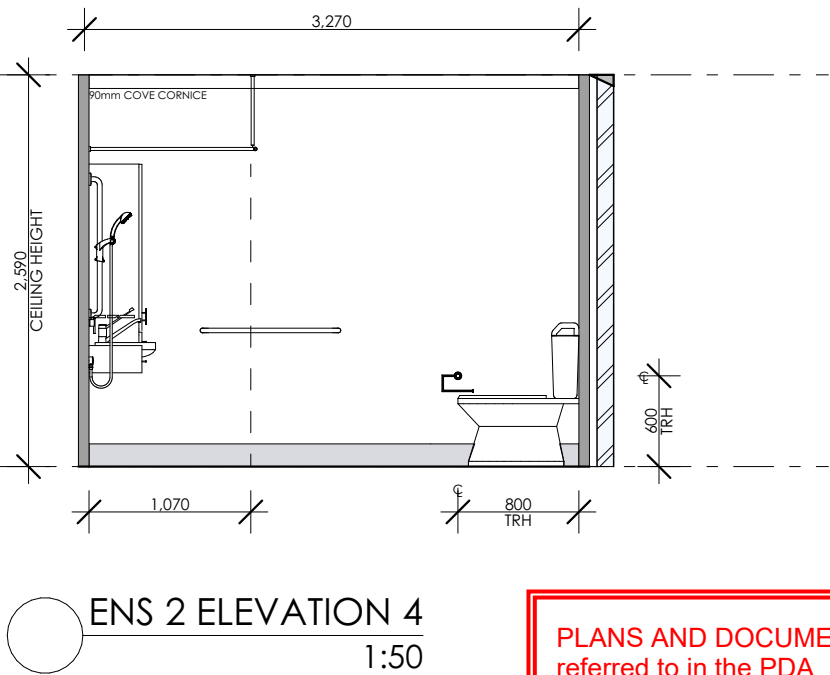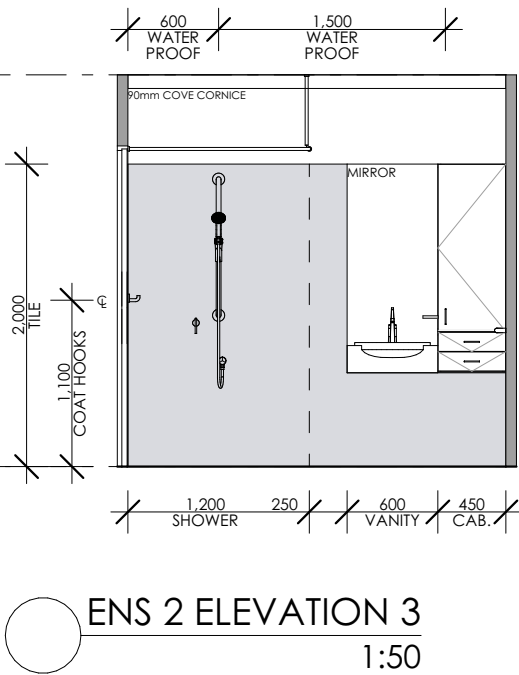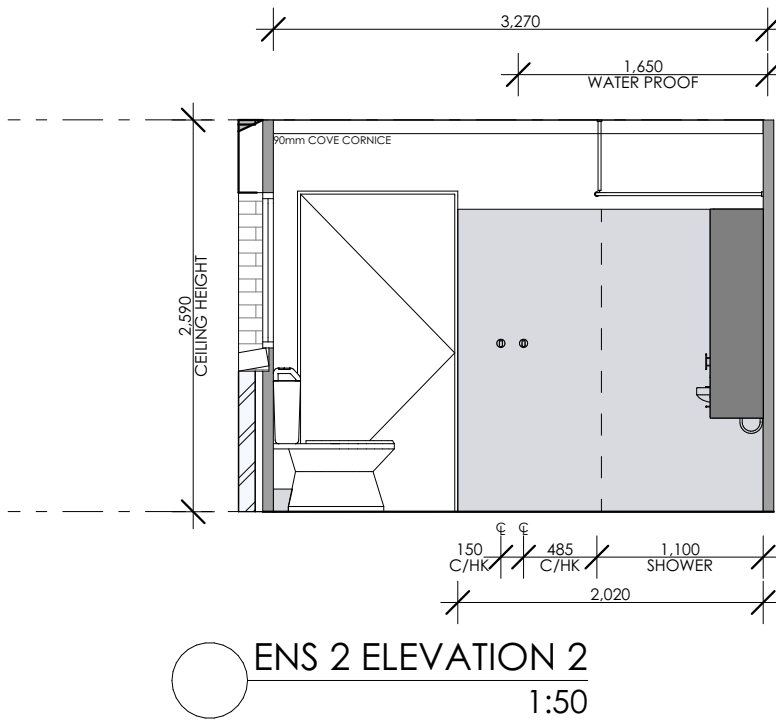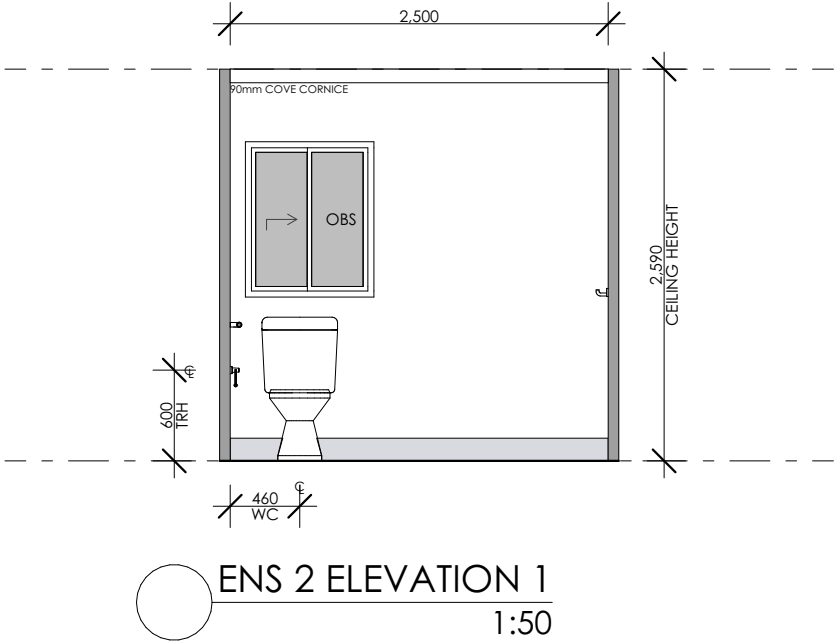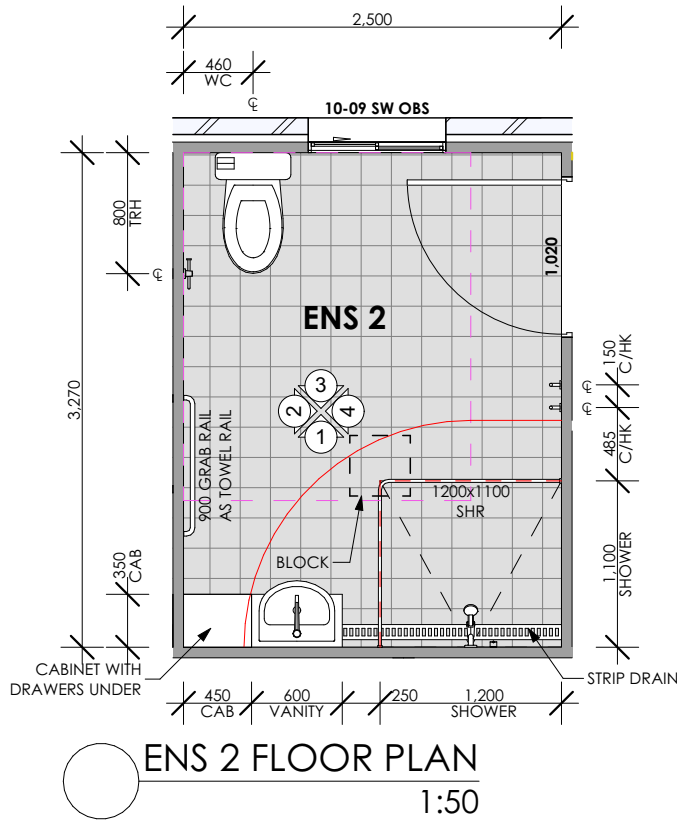

PLANS AND DOCUMENTS
referred to in the PDA
DEVELOPMENT APPROVAL

Approval no: DEV2025/1597
Date: 1 April 2025



TELEPHONE 0756448644
WEBSITE: www.silkwoodhomes.com.au
QLD LICENSE #: 1218048 ABN 65767966
NSW LICENSE #: 248052C ABN 14156406352
UNIT 4/13 INDY COURT
NERANG, QLD 4211 AUSTRALIA

© Silkwood Homes. The copyright
of these plans are owned by
Silkwood Homes. The plans may
not be reproduced, copied or
dealt with in any manner which
infringes the exclusive rights of
Silkwood Homes.

I/ WE APPROVE THESE DRAWINGS TO BE CORRECT AS PER
CONTRACT
SIGNATURE _____ DATE _____
SIGNATURE _____ DATE _____

Issue	Date	Drawn	Amendments
B	12.12.2024	SP	CONTRACT PLAN
C	03.02.2025	PP	WORKING DRAWINGS
D	17.02.2025	MB	PERFORMANCE SOL.
E	21.02.2025	MB	BA SET
F	20.03.2025	MB	PLAN UPDATES

CLIENT:
CJM AUSTRALIA PTY LTD ATF THE CJM FAMILY TRUST
AT: LOT 8235 #26, NAPIER CRESCENT BANYA, QLD 4551

Facade:
PLANTATION
Design Name:
PACIFIC 230

Title:
INTERNALS
Page:
20

Issue:
F
Scale: AS SHOWN
Plot Date: 20/03/2025
Wind Rating:
N2
Drawn By:
PP
Checked By:
MB