




Mode Allotment
8.5m – <10m Wide

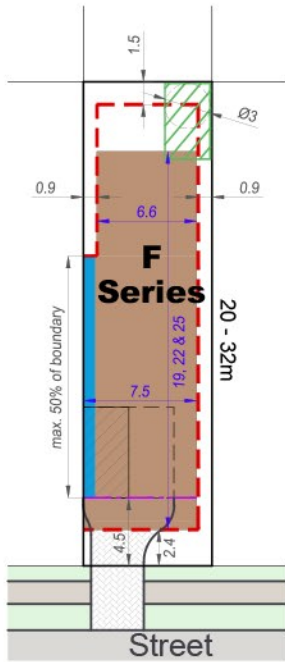


Villa Allotment
10m – <12.5m Wide

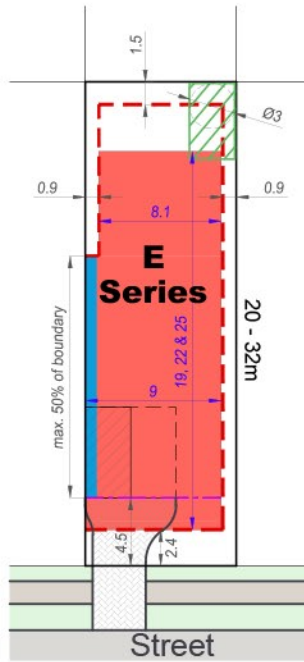


Premium Villa Allotment
12.5m – <14m Wide

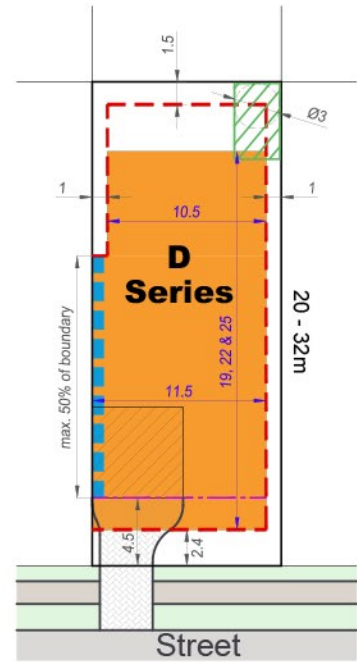


Courtyard Allotment
14m – <18m Wide

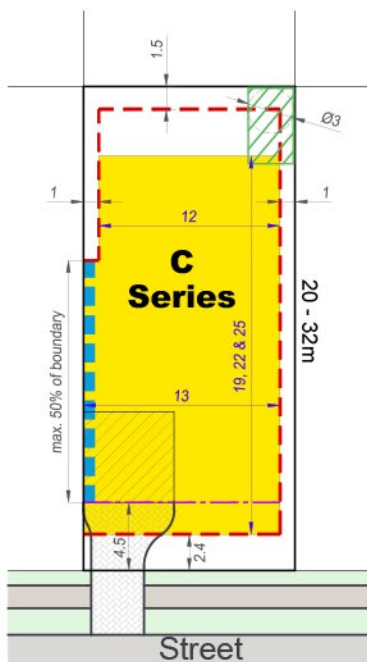

Premium Traditional Allotment
18m+ Wide

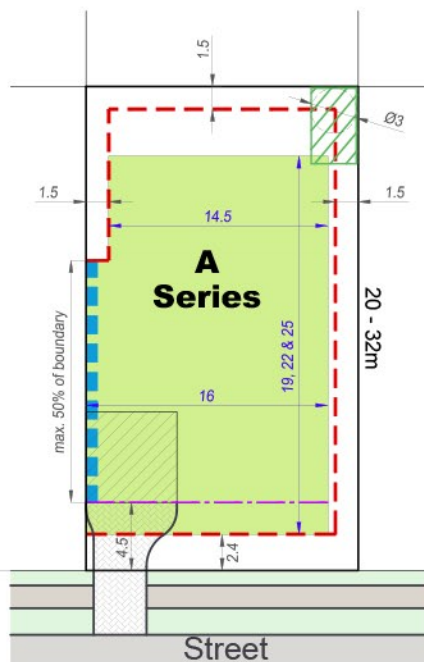

Large Allotment
18m+ Wide

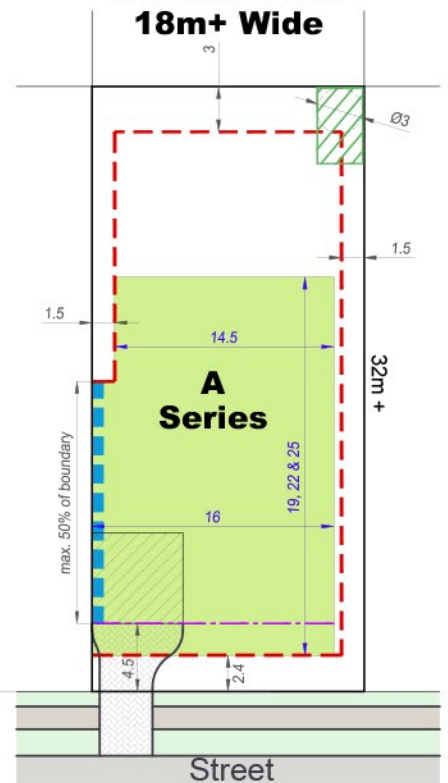





Legend

- Maximum Building Envelope
- 6 Building Setback Dimensions
- Recommended Built to Boundary Wall
- Optional Built to Boundary Wall


- Garage Setback to Front Boundary
- Stockland product envelope
- 6 Building product dimensions
- Preferred private open space location
15m² min. with min. dimension of 3m

- Garage location
- Single garage for single storey dwelling
Double garage when 2 storey dwelling
- Indicative driveway location


Mode Allotment 10m – <11.5m Wide
Villa Allotment 11.5m – <14m Wide
Premium Villa Allotment 14m – <15.5m Wide

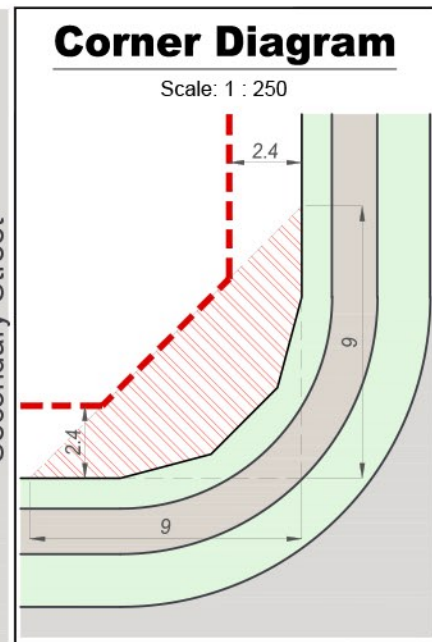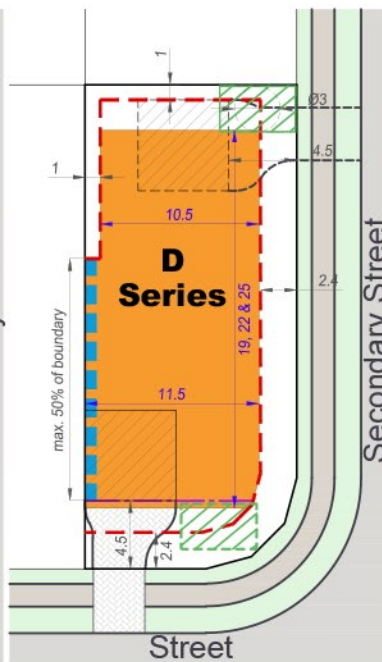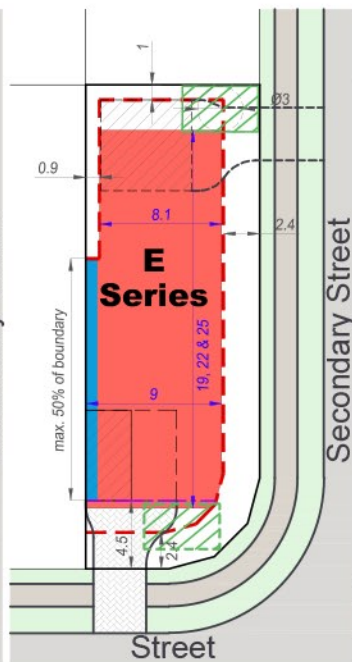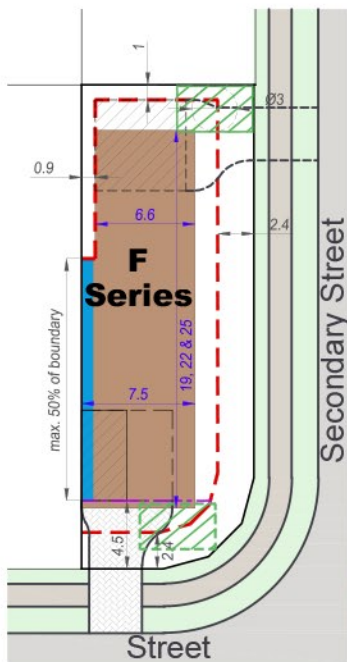


Courtyard Allotment 15.5m – <18.5m Wide

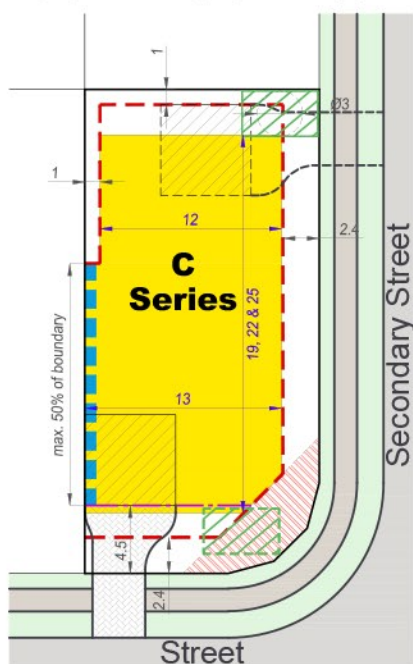

Premium Traditional Allotment 18.5m+ Wide

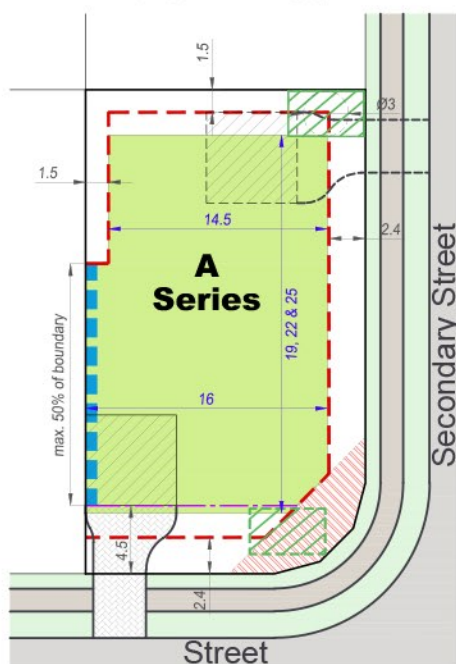

Large Allotment 18.5m+ Wide

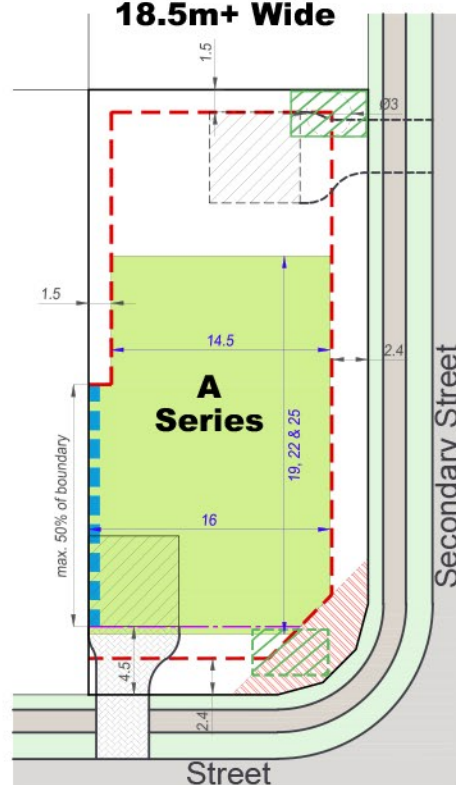

Legend

- Maximum Building Envelope
- Building Setback Dimensions
- Recommended Built to Boundary Wall
- Optional Built to Boundary Wall
- Garage Setback to Front Boundary

- Corner setback
- Stockland product envelope
- Building product dimensions
- Preferred private open space location 15m² min. with min. dimension of 3m
- Alternative location for private open space

- Garage location
- Single garage for single storey dwelling
Double garage when 2 storey dwelling
- Indicative driveway location
- Alternative garage location on secondary street: double garage permissible

Plan of Development Table	Mode Allotments		Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Premium Traditional and Large Lots Allotments		Multiple Residential Allotments (Duplex and Triplex)	
	8.5m – <10.0m Wide		10.0m – <12.5m Wide		12.5m – <14m Wide		14m – <18m Wide		18m & above Wide			
	Ground Floor	Upper Floors	Ground Floor	Upper Floors	Ground Floor	Upper Floors	Ground Floor	Upper Floors	Ground Floor	Upper Floors	Ground Floor	Upper Floors
Front/Primary Frontage	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
Garage	4.5	n/a	4.5	n/a	4.5	n/a	4.5	n/a	4.5	n/a	4.5	n/a
Rear	1.5	3.0	1.5	3.0	1.5	3.0	1.5	3.0	1.5#	3.0	1.0*	1.0*
Side - General Lots									# 3.0m for large lots			
Built to Boundary	0.0	1.0	0.0	1.0	0.0	1.0	0.0	1.0	0.0	1.0	0.0	1.0
Non Built to Boundary	0.9	0.9	0.9	0.9	1.0	1.0	1.0	1.0	1.5	1.5	1.0	1.0
Corner Lots - Secondary Frontage	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
Garage and On-site Car Parking												
On site parking requirements (minimum)	1 space to be covered and enclosed Single Garages (up to 3.5m in width) or tandem garages are acceptable. Double Garages (greater than 3.5m in width) are only permitted for 2 storey dwellings.		1 space to be covered and enclosed Single Garages (up to 4.5m~ in width) or tandem garages are acceptable. Double Garages (greater than 4.5m~ in width) are only permitted for 2 storey dwellings.		1 space to be covered and enclosed Single, tandem or double garage acceptable.		1 space to be covered and enclosed Single, tandem or double garage acceptable.		1 space to be covered and enclosed Single, tandem or double garage acceptable.		1 space per dwelling to be covered and enclosed Single, tandem or double garage acceptable.	
Garage location	Garages are to be located along the built to boundary wall.		Garages are to be located along the built to boundary wall.		Garages are to be located along the built to boundary wall.		Garages are to be located along the built to boundary wall.		Garages are to be located along the western or southern boundary where appropriate.		Garages are to be located along the western or southern boundary where appropriate.	
Site Cover (maximum)	75%		60%		60%		60%		60%		75%	

Note: *second side setback as no rear setback applies

Notes

General

- All development inclusive of Single and Multiple Residential Allotments (Duplex and Triplex) is to be undertaken in accordance with the Development Approval.
- Building setbacks and built-to-boundary wall locations shown are subject to future proposed easements and/or underground services.
- Maximum building height is 3 storeys for dwellings where permitted in the Plan of Development, 2 storeys (9m) otherwise. Rooftop terraces are defined as a 'storey'.

Setbacks

- Setbacks are as per the Plan of Development Table unless otherwise specified. In the case of Courtyard, Traditional and Premium Traditional Corner Lots, an additional setback from the street corner is applicable. The setback applies to any building or structure greater than 2m high. The setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 9m back from the point of intersection of these two boundaries.
- A corner lot, for the purposes of determining setbacks, is a lot that adjoins the intersection of two streets (collector, access street or access place) or a street and a lane. This excludes those lots that abut a shared access driveway or a pedestrian connection/threshold and therefore in these cases a secondary street setback **does not apply**.
- Corner lots are interpreted as having two front boundaries and two side boundaries for the purposes of determining building setbacks (ie. no rear boundary setback applies).
- Built to Boundary walls are recommended where road frontage widths are less than 15 metres. Built to Boundary walls are optional for lots with road frontage widths equal to, or in excess of 11 metres. Where Built to Boundary walls are not adopted side setbacks shall be in accordance with the Allotment Setback Table.
- Built to Boundary walls are to have a maximum length of 15 metres and a maximum height of 3.5 metres.
- Boundary setbacks are measured to the wall of the structure. Eaves should not encroach closer than 450mm to the lot boundary except in the case of:
 - The Primary Street Frontage where eaves should not be closer than 2000mm;
 - Walls that are Built to Boundary.

- Upper floor setbacks must not exceed the minimum ground floor setbacks.

Site Cover and Amenity

- Site cover for each lot is not to exceed 75% of the lot, including Multiple Residential Allotments (Duplex and Triplex), unless the dwelling is in accordance with approved house plans and where appropriate building staging and construction techniques have been demonstrated.
- Private amenity space, must be provided and is not less than 15m² with a minimum dimension of 3.0m and is directly accessible from a ground floor living area.

Privacy & Overlooking

- Buildings must be sited and designed to provide adequate visual privacy for neighbours:
 - Where the distance separating a window or balcony of an adjoining dwelling from the side or rear boundary is less than 1.5 m:
 - a permanent window and a balcony has a window/balcony screen extending across the line of sight from the sill to at least 1.5m above the adjacent floor level; or
 - a window has a sill height more than 1.5m above the adjacent floor level; or
 - a window has obscure glazing below 1.5m; where: Window and Window/Balcony Screen has the same meaning as in the Queensland Development Code.

Fencing

14. For Detached lots:

Fencing along primary street frontages must be either 50% transparent or max. 1.2m high. Fencing to secondary street frontages may be screen fencing max. 1.8m high and extend up to the front building line (main facade).

For Multiple Residential (Duplex and Triplex lots):

Fencing along primary and secondary street frontages must be either 50% transparent or max. 1.2m high.

Parking and Driveways

- For all allotments the following applies:
 - Double garages will not be permitted on a single

storey dwelling, on a lot less than 12.5m wide;

- Double garages may be permitted on a lot 7.5m or wider and less than 12.5m wide where the dwelling is more than one storey in height, and where:
 - the garage is setback at least 1m behind the main facade, excluding balconies, of the dwelling AND
 - the garage doors are articulated, comprise a mix of materials and colours, or are staggered.
- Double garages are permitted on any corner lot if the garage fronts the secondary street frontage as shown in the setback diagrams for detached corner allotments and minimum setbacks (including garage setbacks) can be met.
- The maximum width of a driveway at the lot boundary & where crossing the verge:
 - serving a double garage shall be 4.8m; and
 - serving a single garage shall be 3.0m.
- Parking spaces on driveways do not have to comply with gradients in AS2890.
- A maximum of one driveway per lot is permitted (2 for duplex allotments / 3 for triplex).
- Driveways should avoid on-street works such as dedicated on-street parking bays, drainage pits and service pillars.
- The minimum distance of a driveway from an intersection of one street with another street shall be 6.0 metres.
- The minimum distance between driveways on the same duplex or triplex lot shall be 3.0 metres at the boundary.

Rainwater Tanks

- All detached dwellings must have a min 5000 litre rainwater tank. All multiple residential dwellings (duplex and triplex) must have a min 3000 litre rainwater tank per dwelling. All tanks to residential dwellings must collect a minimum 50% roof area capture. All tanks must supply water to toilets, laundry, hot water and have a connection for external usage and must have a backup supply from the main potable water system.

Definitions

- Site Cover** - the total area of the roof of the dwelling expressed as a percentage of the lot area, but which excludes eave overhangs.

Detached and Multiple Residential Allotments (Duplex and Triplex) Notes & Tables

Notes

General

- All development is to be undertaken in accordance with the Development Approval.
- Building setbacks and build-to-boundary wall locations shown are subject to future proposed easements and/or underground services.
- Maximum building height is 3 storeys for all dwellings where permitted in the Plan of Development, and 2 storeys (9m) otherwise. Rooftop terraces are defined as a 'storey'.

Setbacks

- Setbacks are as per the Plan of Development Table unless otherwise specified.
- Where Built to Boundary walls are not adopted side setbacks shall be in accordance with the Allotment Setback Table.
- A corner lot, for the purposes of determining setbacks, is a lot that adjoins the intersection of two streets (collector, access street or access place) or a street and a lane. This excludes those lots that abut a shared access driveway or a pedestrian connection/threshold and therefore in these cases a secondary street setback **does not apply**.
- Built to Boundary wall shall be no more than 85% of the length of the boundary and may be higher than 3.5 metres where in accordance with approved house plans and where appropriate building staging and construction techniques are demonstrated.
- Boundary setbacks are measured to the wall of the structure. Eaves should not encroach closer than 450mm to the lot boundary except in the case of:
 - The Primary Street Frontage where eaves should not be closer than 1500mm;
 - Terrace Allotments where the Built to Boundary wall may be a common wall or no setback is required; and
 - Walls that are Built to Boundary.
- Upper floor setbacks must not exceed the minimum ground floor setbacks, including roof top terraces.

Site Cover and Amenity

- Site cover for each lot is not to exceed 75% of the lot, unless the dwelling is in accordance with approved house plans and where appropriate building staging and construction techniques have been demonstrated.
- Private amenity space, must be provided and is not less than 15m² with a minimum dimension of 3.0m and is directly accessible from a ground floor living area.

Privacy & Overlooking

- Buildings must be sited and designed to provide adequate visual privacy for neighbours:

- Where the distance separating a window or balcony of an adjoining dwelling from the side or rear boundary is less than 1.5 m:
 - a permanent window and a balcony has a window/balcony screen extending across the line of sight from the sill to at least 1.5m above the adjacent floor level; or
 - a window has a sill height more than 1.5m above the adjacent floor level; or
 - a window has obscure glazing below 1.5m; where: Window and Window/Balcony Screen has the same meaning as in the Queensland Development Code.

Fencing

- Fencing along the primary street frontage must be either 50% transparent or max. 1.2m high. Fencing to secondary street frontages may be screen fencing up to 1.8m high up to the front building line (main facade).

Parking and Driveways

- For all allotments the following applies:
 - Double garages will not be permitted on a single storey dwelling;
 - Double garages may be permitted where the dwelling is more than one storey in height, and where:
 - the garage is setback at least 1m behind the main facade, excluding balconies, of the dwelling AND
 - the garage doors are articulated, comprise a mix of materials and colours, or are staggered.
 - The maximum width of a driveway at the lot boundary & where crossing the verge:
 - serving a double garage shall be 4.8m; and
 - serving a single garage shall be 3.0m.
- Parking spaces on driveways do not have to comply with gradients in AS2890.
- A maximum of one driveway per dwelling is permitted.
- Driveways should avoid on-street works such as dedicated on-street parking bays, drainage pits and service pillars.
- The minimum distance of a driveway from an intersection of one street with another street shall be 6.0 metres.

Access Deeds

- Access Deeds are required to be established on all dwellings where there are adjoining built to boundary walls. These deeds will permit periodic maintenance access onto the roof of the dwelling on the adjoining lot, and permit roof water and waste to be deposited from time to time on to the roof.

Rainwater Tanks


- All attached dwellings (including urban, terraces, laneway terrace and duplex dwellings) must have a min 3000 litre rainwater tank. All tanks to residential dwellings must collect a minimum 50% roof area capture. All tanks must supply water to toilets, laundry, hot water and have a connection for external usage and must have a backup supply from the main potable water system.

Definitions


Site Cover - the total area of the roof of the dwelling expressed as a percentage of the lot area, but which excludes eave overhangs

Plan of Development Table	Terrace Allotments	
	7.5m – <10m Wide	
	Ground Floor	First Floor
Front/Primary Frontage	2.0	2.0
Garage	4.5	n/a
Rear	1.5	1.5
Side - General Lots		
Built to Boundary	0.0	0.0
Non Built to Boundary	0.9	0.9
Corner Lots - Secondary Frontage	2.0	2.0
Garage and On-site Car Parking		
On site parking requirements (minimum)	1 space to be covered and enclosed Single or tandem garage acceptable. Double garages are only permitted on two storey dwellings.	
Garage location	Garages are to be located along the built to boundary wall.	
Site Cover (maximum)	75%	

Terrace Allotment 7.5m – <10m Wide

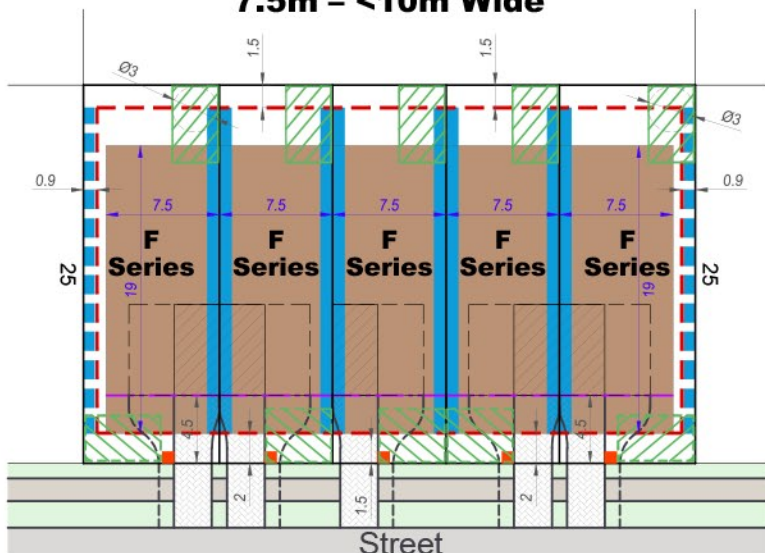

Corner Terrace Allotment 10m – <11.5m Wide

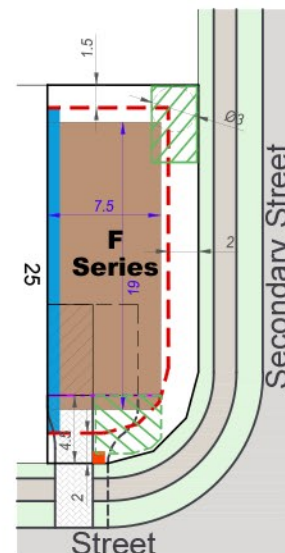

Legend

- Maximum Building Envelope
- Building Setback Dimensions
- Recommended Built to Boundary Wall
- Optional Built to Boundary Wall (where permitted on PoD)
- Garage Setback to Front Boundary

- Corner setback
- Stockland product envelope
- Building product dimensions
- Preferred private open space location 15m² min. with min. dimension of 3m
- Alternative location for private open space

- Garage location
- Single garage for single storey dwelling
Double garage when 2 storey dwelling
- Indicative driveway location
- Preferred letterbox location

SCALE 1 : 500 @ A4

RPS


0 5 10 15 20 25

Loft Dwellings on Laneway

- ground floor



- upper floors

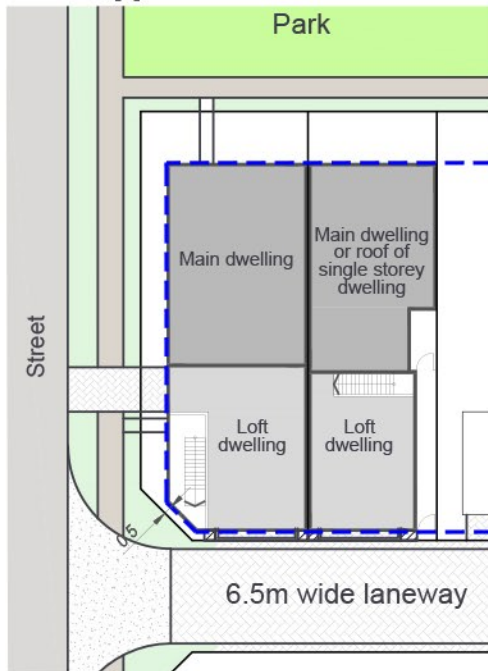

Legend

- Indicative Garage
- Setback Dimensions
- Indicative Driveway Location
- Preferred Private Open Space Location 15m² min. with min. dimension of 3m
- Maximum Building Envelope
- Maximum Building Envelope - upper floors
- Garage Setback to Front Boundary
- Preferred Location of Bin Storage
- Preferred Location of Bin Collection
- Preferred Letterbox Location
- Entrance to Main Dwelling
- Entrance to Loft Dwelling

SCALE 1 : 500 @ A4



Notes

General

- All development is to be undertaken in accordance with the Development Approval.
- Building setbacks and built-to-boundary wall locations shown are subject to future proposed easements and/or underground services.
- Maximum building height is 3 storeys for dwellings where permitted in the Plan of Development, and 2 storeys (9m) otherwise. Rooftop terraces are defined as a 'storey'.

Setbacks

- Setbacks are as per the Plan of Development Table unless otherwise specified.
- Built to Boundary Walls:**
 - Built to boundary wall dimensions are limited by the applicable boundary setbacks and building height limit. Building plans and details of appropriate development staging and construction methods must be submitted for approval;
 - where not adopted, the standard setbacks in the Plan of Development Table apply.
- Boundary setbacks are measured to the wall of the structure. Eaves should not encroach closer than 450mm to the lot boundary except in the case of:
 - The Primary Street/Park Frontage where eaves should not be closer than 1500mm;
 - Terrace Allotments where the Built to Boundary wall may be a common wall or no setback is required; and
 - Walls that are Built to Boundary.
- Upper floor setbacks must not exceed the minimum ground floor setbacks (including rooftop terraces).
- Privacy & Overlooking:** Buildings must be sited and designed to provide adequate visual privacy for neighbouring dwellings:

Where the distance separating a window or balcony of an adjoining dwelling from the side or rear boundary is less than 1.5 m:

- a permanent window and a balcony has a window/balcony screen extending across the line of sight from the sill to at least 1.5m above the adjacent floor level; or
 - a window has a sill height more than 1.5m above the adjacent floor level; or
 - a window has obscure glazing below 1.5m;
- where: Window and Window/Balcony Screen has the same meaning as in the Queensland Development Code.

- Where loft dwellings are built adjacent the laneway, the design of windows, balconies and other amenity spaces shall be located and adequately screened to avoid overlooking of and from loft apartments/dwellings on the opposite side of the laneway.

Site Cover and Amenity

- Site cover for each lot is not to exceed 85% of the lot, unless the dwelling is in accordance with approved house plans and where appropriate building staging and construction techniques have been demonstrated.
- Private amenity space, must be provided and is not less than 15m² with a minimum dimension of 3.0m and is directly accessible from a ground floor living area. For loft dwellings built adjacent the laneway this amenity space may be roofed and may be provided as a balcony not less than 9m² with a minimum dimension of 1.5m.

Fencing, Letterboxes, Parking and Driveways

- Fencing along street and park frontages must be either 50% transparent or max. 1.2m high. Fencing to the lane may be screen fencing to 1.8m high.
- Letterboxes for the main dwelling shall be located on the primary street or park frontage and not in the laneway. Letterboxes for loft apartments on corner allotments shall be located on the secondary street frontage and not in the laneway. Letterboxes for loft apartments on other lots (mid laneway) may be located on the lane generally as shown in the Loft dwelling on Laneway diagrams.
- Standard allotments adjoining a laneway must have their garage fronting the laneway, comply with the setbacks, and have fencing to the laneway in accordance with that shown in the laneway terrace diagram.
- Parking spaces on driveways do not have to comply with gradients in AS2890.
- A maximum of one driveway per dwelling is permitted which may be shared where there is more than 1 dwelling on a lot.
- Driveways should have the minimum width required to facilitate vehicle access, in order to maintain space between driveways, pathways and

any bin storage areas for amenity planting.

- Driveways should avoid on-street works such as dedicated on-street parking bays, drainage pits and service pillars.
- The minimum distance of a driveway from an intersection of one street with another street shall be 6.0 metres.

Loft Dwellings

- Loft dwellings (a self contained dwelling generally with single garage constructed adjacent to the laneway and above the garaging on that allotment) may be constructed on laneway terrace allotments.
- The access, parking, entry, letterbox and rubbish storage and collection shall be generally as shown in the diagrams: Loft Dwellings on Laneway, and Laneway Interface, in this PoD.
- To ensure passive surveillance of the laneway, loft dwellings shall have windows, balconies/verandahs overlooking the lane where requirements for privacy/overlooking can be maintained.

Laneway Interface

- The relationship of garages to the laneway and bin storage areas shall be generally as shown in the diagrams: Laneway Terrace Allotment and Loft Dwellings on Laneway, in this PoD.

Access Deeds

- Access Deeds are required to be established on all dwellings where there are adjoining built to boundary or parti walls. These deeds will permit periodic maintenance access on to the roof of the dwelling on the adjoining lot, and permit roof water and waste to be deposited from time to time on to the roof.

Rainwater Tanks

- All dwellings must have a min 3000 litre rainwater tank. All tanks to residential dwellings must collect a minimum 50% roof area capture. All tanks must supply water to toilets, laundry, hot water and have a connection for external usage and must have a backup supply from the main potable water system.

Definitions

Site Cover - the total area of the roof of the dwelling expressed as a percentage of the lot area, but which excludes eave overhangs

Plan of Development Table	Laneway Terrace & Detached Laneway Allotments	
	5m – <10m Wide	
	Ground Floor	First Floor
Front/Primary Frontage	2.0	2.0
Garage	0.5	n/a
Rear	0.5	0.0
Side - General Lots		
Built to Boundary	0.0	0.0
Non Built to Boundary	0.9	0.9
Corner Lots - Secondary Frontage	1.5	1.5
Garage and On-site Car Parking		
On site parking requirements (minimum)	1 space to be covered and enclosed	
Garage location	Single, tandem or double garage acceptable.	
	Garages are to be located along the built to boundary wall.	
Site Cover (maximum)	85%	


Sheet 1 of 3

Laneway Terrace and Detached Laneway Allotment Diagrams

Caloundra South - Precinct 2

Stockland

Laneway Terrace Allotment Terrace onto park or street 5m – 10m+ Wide

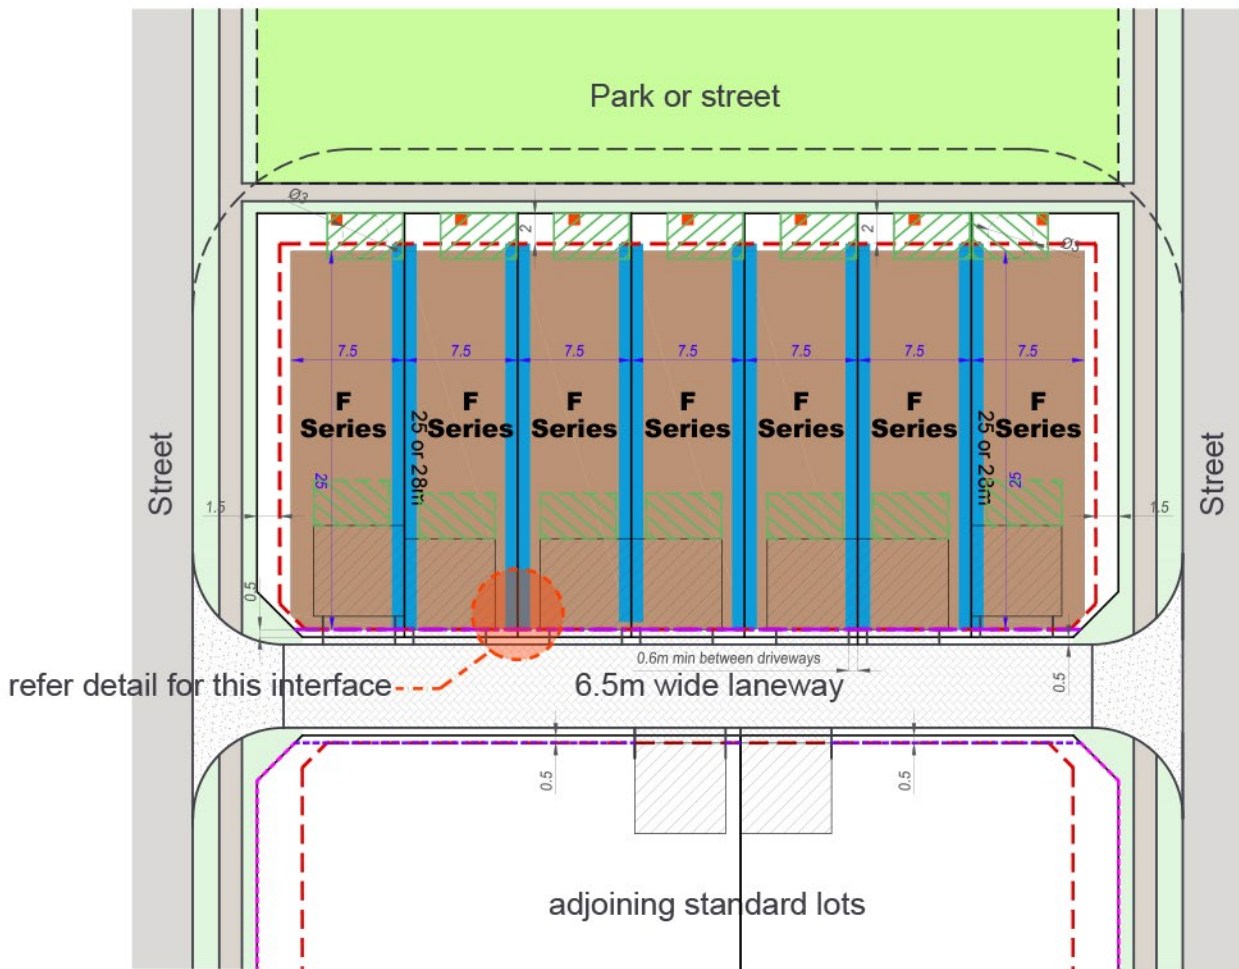

Legend

- Indicative Garage
- Garage Location
- Building Product Dimensions
- Setback Dimensions
- Indicative Driveway Location
- Preferred Private Open Space Location
15m² min. with min. dimension of 3m
- Alternative Private Open Space Location
as internal courtyard
- Single Garage for Single Storey Dwelling
Double Garage when 2 Storey Dwelling Only
- Maximum Building Envelope - Ground Floor
- Maximum Building Envelope - Upper Floors
- Recommended Built to Boundary Wall
- Garage Setback to Front Boundary
- Stockland Product Type Envelope
- Preferred Location of Bin Storage
- Preferred Location of Bin Collection
- Preferred Letterbox Location
- Screen Fence to Bins
- Low fencing 1.2-1.4m high
- Screen fencing up to 1.8m high

Laneway Interface



Sheet 2 of 3

Laneway Terrace Allotments Diagrams

Caloundra South - Precinct 2

Stockland




SCALE 1 : 500 @ A4



Detached Laneway Terrace Allotment

Terrace onto park or street

8.5m – 12m+ Wide

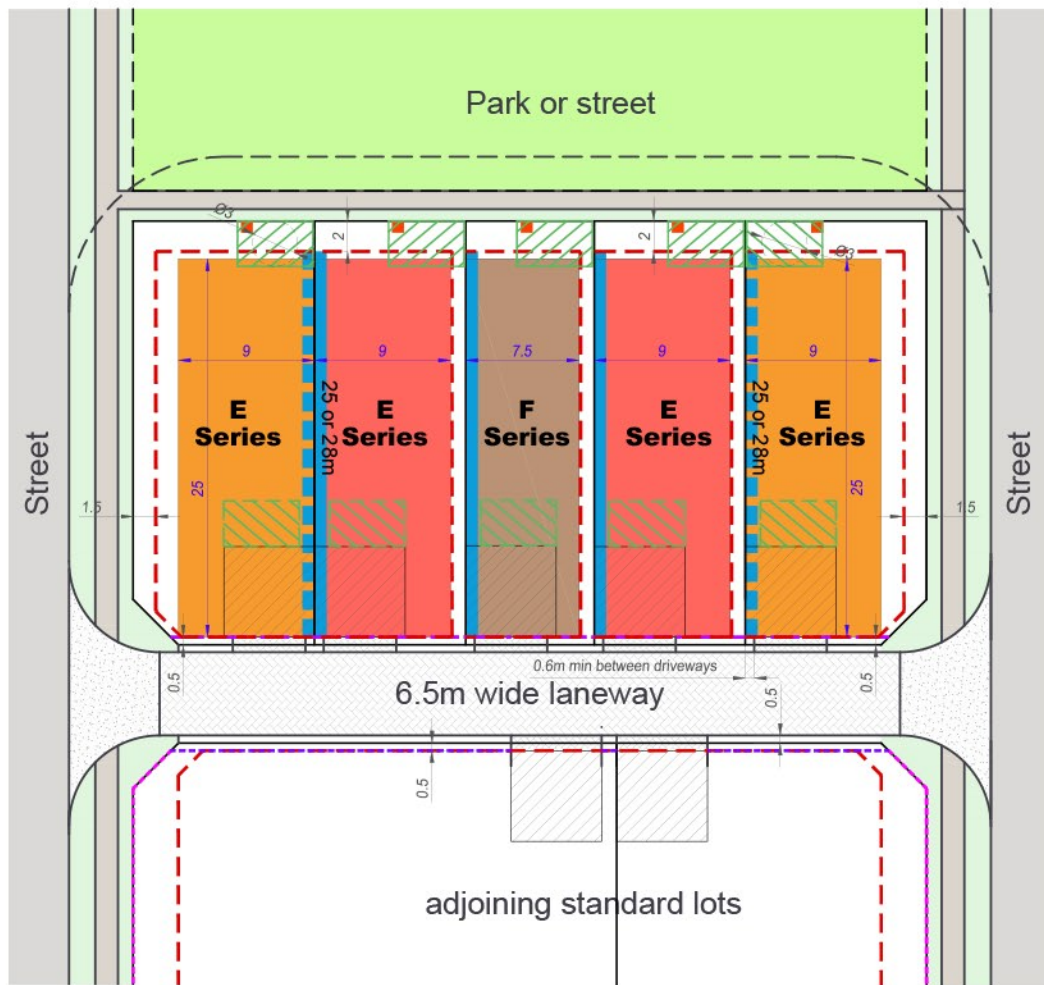

Legend

- Indicative Garage
- Garage Location
- Building Product Dimensions
- Setback Dimensions
- Indicative Driveway Location
- Preferred Private Open Space Location
15m² min. with min. dimension of 3m
- Alternative Private Open Space Location
as internal courtyard
- Single Garage for Single Storey Dwelling
Double Garage when 2 Storey Dwelling Only
- Maximum Building Envelope - Ground Floor
- Maximum Building Envelope - Upper Floors
- Recommended Built to Boundary Wall
- Garage Setback to Front Boundary
- Stockland Product Type Envelope
- Preferred Location of Bin Storage
- Preferred Location of Bin Collection
- Preferred Letterbox Location
- Screen Fence to Bins
- Low fencing 1.2-1.4m high
- Screen fencing up to 1.8m high

Development Controls

General

1. All development is to be undertaken in accordance with the Development Approval.
2. All building setbacks and built to boundary walls are subject to service easements existing and proposed.
3. Maximum building height is 2 storeys (9m) for all dwellings. Rooftop terraces are defined as a 'storey', including rooftop terraces.

Setbacks

4. Setbacks are as per the Plan of Development Table, unless dimensioned otherwise on plan.
5. Setbacks are measured to the wall of the building or structure. Eaves may extend into the side and rear setbacks up to 450mm from the property boundary. Eaves may extend up to the street boundary for Type A and B Urban lots and 2000mm for Type C and D Urban Lots.
6. Upper floor setbacks must be in accordance with minimum ground floor setbacks.
7. **Built to Boundary Walls:**
 - a) Built to boundary wall dimensions are limited by the boundary setbacks and building height limit. Building plans and details of appropriate development staging and construction methods must be submitted for approval;
 - b) where not adopted, the standard setbacks in the Plan of Development Table apply.

Privacy & Overlooking

8. Buildings must be sited and designed to provide adequate visual privacy for neighbours:
 - Where the distance separating a window or balcony of an adjoining dwelling from the side or rear boundary is less than 1.5 m:
 - a. a permanent window and a balcony has a window/balcony screen extending across the line of sight from the sill to at least 1.5m above the adjacent floor level; or
 - b. a window has a sill height more than 1.5m above the adjacent floor level, or
 - c. a window has obscure glazing below 1.5m; where: Window and Window/Balcony Screen has the same meaning as in the Queensland Development Code.

Parking and Driveways

9. A maximum of one driveway is permitted per lot.
10. Driveways are to have the following widths:
 - single driveway: minimum 3.0m and maximum 3.5m;
 - shared double driveway: mandatory where shown on plan.
11. Driveways are to avoid on-street works such as: dedicated parking bays, drainage inlets, service pillars, street planting beds and bio-retention areas.
12. The minimum distance between a driveway and street intersection is 6.0m.
13. Parking spaces on driveways do not have to comply with gradients in AS2890.

Private Open Space

14. Private open space may be roofed and must meet the following requirements:
 - Type A: 6m² at ground level;
 - Type B: 9m² at ground level;
 - Type C & D: 12m² at ground level;

Fencing

15. Fencing along the street frontage may be up to 1.5m to provide appropriate privacy.

Access Deeds

16. Access Deeds are required to be established on all dwellings where there are adjoining built to boundary walls. These deeds will permit periodic maintenance access on to the roof of the dwelling on the adjoining lot, and permit roof water and waste to be deposited from time to time on to the roof.


Rainwater Tanks

17. All urban dwellings must have a min 3000 litre rainwater tank. All tanks to residential dwellings must collect a minimum 50% roof area capture. All tanks must supply water to toilets, laundry, hot water and have a connection for external usage and must have a backup supply from the main potable water system.

Definitions

Site Cover - the total area of the roof of the dwelling expressed as a percentage of the lot area, but which excludes eave overhangs.

Urban Allotments - standard

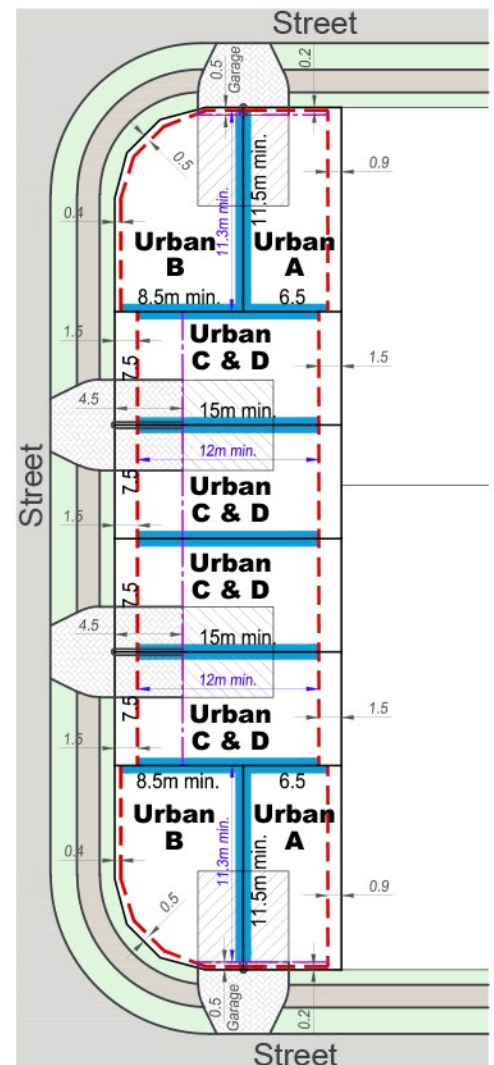

Plan of Development Table	Urban Allotments Type A & B		Urban Allotments Type C & D	
	Ground Floor	First Floor	Ground Floor	First Floor
Front/Primary Frontage	0.2	0.2	1.5	1.5
Garage	0.5	n/a	4.5	n/a
Rear	0.0	0.0	1.5	1.5
Side - General Lots				
Built to Boundary	0.0	0.0	0.0	0.0
Non Built to Boundary	0.9	0.9	0.9	0.9
Corner Lots - Secondary Frontage	as shown	as shown	1.5	1.5
Garage and On-site Car Parking				
On site parking requirements (minimum)	1 space to be covered and enclosed		1 space to be covered and enclosed	
	Single or tandem garage acceptable.		Single or tandem garage acceptable.	
	Double garages are not permitted.		Double garages are not permitted.	
Garage location	Garages are to be located along the built to boundary wall.		Garages are to be located along the built to boundary wall.	
Site Cover (maximum)	85%		85%	

Legend

- - - Maximum building envelope
- Recommended built to boundary wall
- - - Garage setback to front boundary
- Garage location
- 6 Building envelope dimensions
- 6 Setback dimensions
- Indicative driveway location