




# Operational Waste Management Plan

Proposed Mixed-Use Development

At Lot 18A, 260 Macarthur Avenue, Hamilton

On Behalf of Silverstone Developments

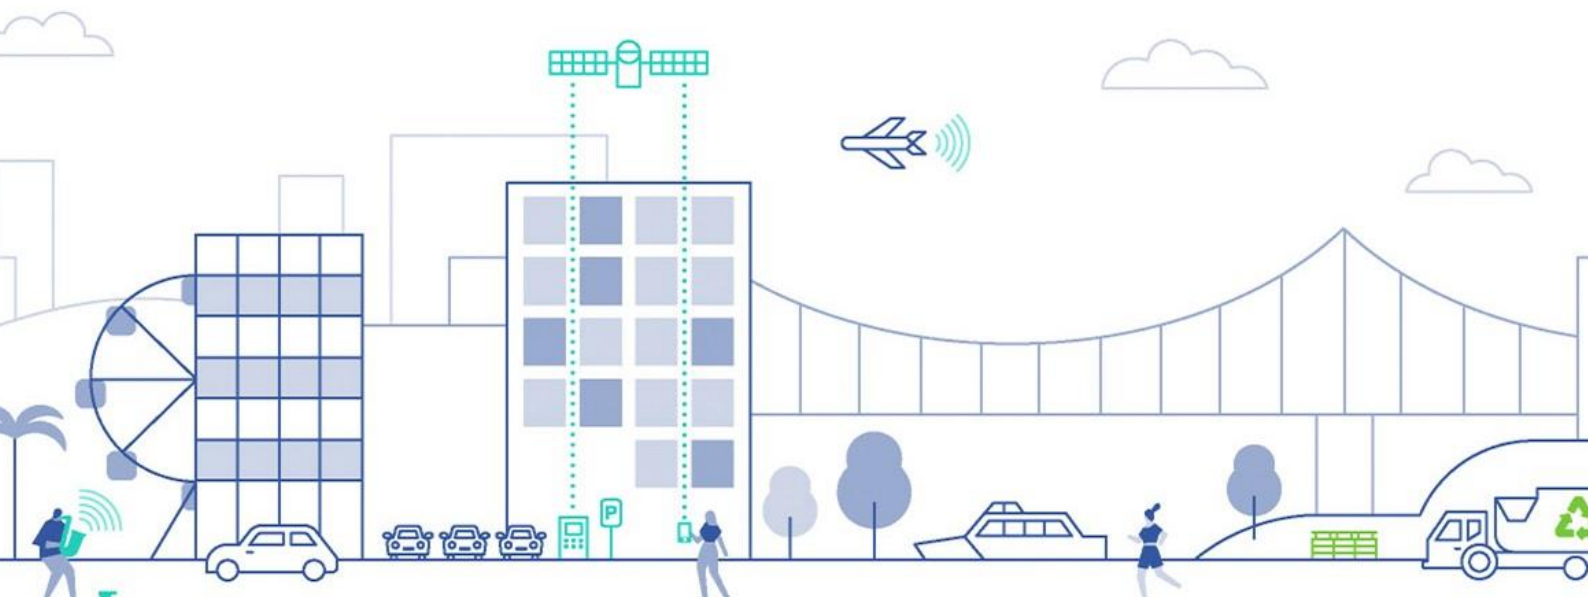

# About TTM

For 30 years, we've been at the centre of the Australian development and infrastructure industry. Our unique combination of acoustics, data, transport and waste services is fundamental to the success of any architectural or development project.

We have over 50 staff, with an unrivalled depth of experience. Our industry knowledge, technical expertise and commercial insight allow us to deliver an exceptional and reliable service.

T: (07) 3327 9500  
 F: (07) 3327 9501  
 E: [ttmbris@ttmgroup.com.au](mailto:ttmbris@ttmgroup.com.au)



## Revision Record

Issue No.	Author	Reviewed/Approved	Development Stage / Revision Description	Date
1.	N. Lee	S. Kenny	Schematic Design – OWMP Submissible	16/12/2024
2.				
3.				

## Contents

<b>1</b>	<b>Introduction .....</b>	<b>4</b>
1.1.	Background .....	4
1.2.	Client Brief and Scope .....	4
1.3.	Site Analysis.....	5
1.4.	Site Statistics .....	6
<b>2</b>	<b>Regulatory Refuse Management Requirements.....</b>	<b>7</b>
2.1.	Regulatory and Governance Considerations .....	7
2.2.	Anticipated Refuse Volumes .....	9
2.3.	Refuse Bin, Equipment Requirements and Specification .....	12
2.4.	Refuse Disposal .....	14
2.5.	Refuse Storage, Access and Rotation Requirements.....	17
2.6.	Refuse Transfer .....	20
2.7.	RCV and Bin Servicing Arrangements .....	22
<b>3</b>	<b>Recommended Operational Refuse Management .....</b>	<b>24</b>
3.1.	Anticipated Residential Refuse Volumes .....	24
3.2.	On-going Management .....	26
<b>Appendix A</b>	<b>Council PSP Compliance Checklist.....</b>	<b>31</b>
<b>Appendix B</b>	<b>Site Plans, Drawings and Swept Path Analysis.....</b>	<b>36</b>
<b>Appendix C</b>	<b>Systems and Specifications .....</b>	<b>42</b>
C.1	Specified Refuse Management Equipment .....	43
<b>Appendix D</b>	<b>Refuse Signage.....</b>	<b>46</b>
D.1	Refuse Signage .....	47
D.2	Other Refuse, Facility and Safety Signage .....	48
<b>Appendix E</b>	<b>Terms and Abbreviations.....</b>	<b>49</b>

## Table Index

Table 1.1: Scope Items .....	4
Table 2.1: OWMP Development Scheme Checklist.....	7
Table 2.2: Refuse Generation Rates.....	10
Table 2.3: Non-Residential Refuse Composition Splits.....	10
Table 2.4: Refuse Calculations Building 1 – East .....	10
Table 2.5: Refuse Calculations Building 2 – North.....	11
Table 2.6: Combined Non-residential Refuse Calculations .....	11
Table 2.7: Combined Residential Total Bin Requirements .....	12
Table 2.8: Combined Non-Residential Bin Requirements .....	12
Table 2.9: Additional Equipment.....	13
Table 2.10: Disposal of Frequently Generated Waste.....	14
Table 2.11: Disposal of Frequently Generated Recoverables .....	15
Table 2.12: Disposal of Infrequently Generated Waste .....	16
Table 2.13: Refuse Storage Area Design Requirements .....	19
Table 2.14: Refuse Transfer Path Design .....	20
Table 2.15: Service Area Design .....	22
Table 3.1: Recommended Bin Requirements (Total) .....	25
Table 3.2: Food Organics Processing Capacity .....	25
Table 3.3: Implementation Checklist.....	26
Table 3.4: Occupation / Operation Checklist .....	28
Table 3.5: Review and Amendment Checklist.....	29

## Figure Index

Figure 1.1: Site Location.....	5
Figure 1.2: Development Summary .....	6
Figure 2.1: Refuse Storage Area Layouts.....	18
Figure 2.2: Refuse Transfer Path.....	21
Figure 2.5: RCV Swept Path.....	23

# 1 Introduction

## 1.1. Background

Colliers International Engineering & Design (TTMC) has been engaged by Silverstone Developments to prepare an Operational Waste Management Plan (OWMP) to support a proposed mixed-use development located at Lot 18A, 260 Macarthur Avenue, Hamilton. It is understood this OWMP will accompany a Development Application submitted to Economic Development Queensland (EDQ).

## 1.2. Client Brief and Scope

The proposed development seeks to address planning assessment benchmarks in providing a deemed to satisfy waste management strategy. Additionally, a strategy that is as convenient as possible for residents, tenancy staff and servicing contractors while minimising ongoing building management intervention and subsequently expense.

The content of this OWMP is intended to provide information on the typical movement of waste streams from generation to collection. Information on refuse management is given for each building within the development.

Detailed information including site plans and drawings, recommended refuse management equipment and system specifications, common refuse signage as well as a list of terms and abbreviations are provided in the appendices.

The recommendations in this report relate to the operational phase of the development only. Additional requirements for refuse management during or after demolition or construction phases are not included and require a dedicated plan.

The items covered within the OWMP are described in Table 1.1.

Table 1.1: Scope Items

Item	Description
Refuse streams	Identification of refuse streams & anticipated development refuse volumes likely to be produced
Refuse separation	Recommendations for appropriate segregation methods for each refuse stream
Refuse collections	Assessment of refuse collection vehicle (RCV) access and manoeuvring
Refuse storage	Detailed analysis of refuse storage facilities and design
Refuse transfer	Assessment of refuse transfer between refuse storage and collections areas
Refuse disposal	Recommendations for refuse disposal within the development
Refuse management equipment	Identification of recommended and optional refuse management systems and equipment
Refuse management operations	Recommendations for operational efficiency and ongoing management, including refuse minimisation, tenant education and safety
Building design	Recommendations for design of refuse management facilities

### 1.3. Site Analysis

The site is located at 260 Macarthur Avenue, Hamilton and is formally described as Lot 6 on SP 326594 as depicted in Figure 1.1.

The site is located within the *Mixed use high density sub area 4* of the Northshore Hamilton Priority Development Area (PDA).

The site has frontages on Macarthur Avenue, Angora Road and Karakul Road with a proposed volumetric easement to the west of the development site. All vehicular access for the site will occur via Karakul Road.



Figure 1.1: Site Location

Source: Nearmap, Image Dated 06/11/2024



## 1.4. Site Statistics

The proposed development consists of 2 multiple dwelling buildings over mixed-use podium and common basement providing the car and bike parking of both buildings. Communal resident amenity is provided on a common Level 1.

The buildings are referred to as Building 1 – East and Building 2 – North, relative to their geographic orientation on the site.

Figure 1.2 provides a summary of the development as context for the refuse volume information provided in Section 2.

SITE AREA		8120 sqm			BUILDING ONE (EAST)				BUILDING TWO (NORTH)			
LEVEL	TYPE	GFA (sqm)	NSA (sqm)	POS (sqm)	1 BED	2 BED	3 BED	TOTAL APT	1 BED	2 BED	3 BED	TOTAL APT
12	AMENITIES / PLANT	169										
11	RESIDENTIAL	879	812	162	1	7	1	9				
10	RESIDENTIAL	879	812	162	1	7	1	9				
9	RESIDENTIAL	879	812	162	1	7	1	9				
8	RESIDENTIAL	1,757	1,623	328	1	7	1	9	1	7	1	9
7	RESIDENTIAL	1,757	1,623	328	1	7	1	9	1	7	1	9
6	RESIDENTIAL	1,757	1,623	328	1	7	1	9	1	7	1	9
5	RESIDENTIAL	1,757	1,623	328	1	7	1	9	1	7	1	9
4	RESIDENTIAL	1,757	1,623	328	1	7	1	9	1	7	1	9
3	RESIDENTIAL	1,757	1,623	328	1	7	1	9	1	7	1	9
2	RESIDENTIAL	1,757	1,623	328	1	7	1	9	1	7	1	9
1	RESIDENTIAL	1,777	1,366	287	2	6	1	9	5	5	1	6
G	RESIDENTIAL / RETAIL	1,908	828	313		1	1	2	1	3	2	6
<b>TOTAL</b>	<b>ABOVE GROUND</b>	<b>18,790</b>	<b>15,991</b>	<b>3,382</b>	<b>12</b>	<b>77</b>	<b>12</b>	<b>101</b>	<b>8</b>	<b>57</b>	<b>10</b>	<b>75</b>

Figure 1.2: Development Summary

Source: Carr, Project: Lot 18A Northshore Hamilton, Drawing: Development Summary, Drawing Number: -, Rev: -

## 2 Regulatory Refuse Management Requirements

This section provides the detailed refuse calculations and describes the arrangements for the collection, storage, transfer and disposal of refuse within the development as deemed to satisfy current assessment benchmarks. This includes associated bin quantities, storage capacities, equipment details, collection frequencies and site access details.

### 2.1. Regulatory and Governance Considerations

#### 2.1.1. State Government Development Scheme

This plan has been prepared to align with the refuse requirements of the Northshore Hamilton PDA Development Scheme. TTMC has referred to the requirements of Section 2.5.4.7 and Schedule 2 as these sections outline the waste management controls for all development within the PDA.

Whilst the application will be submitted to EDQ as a Development Application, it is noted that the site is located within the Brisbane City Council local government area. As such, where relevant this development has been designed to align with the respective provisions of the Brisbane City Council City Plan 2014 as outlined in Section 2.1.2.

Table 2.1 details the refuse management items addressed to align with the Northshore Hamilton PDA Development Scheme.

Table 2.1: OWMP Development Scheme Checklist

Northshore Hamilton PDA Development Scheme – October 2022		
Item	Requirement	Compliance / Comment
<b>Section 2.5.4.7 – Waste Management</b>		
Development:		
(i)	Provides facilities for the safe and efficient removal of waste	Complies – Details throughout this OWMP.
(ii)	Provides facilities for recycling, composting and waste reduction	Complies – Details throughout this OWMP.
(iii)	Ensures that no liquid or solid wastes, other than stormwater, are discharged to neighbouring land or waters	Complies – Sewer connected drainage points in all refuse storage locations.
(iv)	Ensures waste access and collection points and servicing areas for waste collection vehicles are appropriately designed to mitigate and manage acoustic and odour impacts	Complies – Located within fully enclosed dedicated rooms within both buildings.
(v)	Ensures waste management areas are designed to be integrated into part of the development, preferably within the building or specifically designed enclosed areas, and designed to avoid disruption to movement and circulation areas ensuring the safe, convenient, and prioritised movement of pedestrians, active transport users and private vehicles.	Complies – Storage located within fully enclosed rooms, integrated into buildings, not visible from the public realm.



### 2.1.2. Council's Refuse Planning Scheme

As this development is located within the Brisbane City Council (BCC) Local Government Area, and where specific design controls are not provided within the PDA Development Scheme, this plan has been prepared to generally align with BCC's refuse requirements of SC6.26 Refuse Planning Scheme Policy (PSP) v30. Additionally, AO2 / PO2, AO63.1, AO63.2 / PO63 of the Centre or mixed use code and AO8.1, AO8.2 / PO8 of the Infrastructure design code.

TTMC has referred to BCC's requirements as outlined in the Refuse PSP under section 2, 3, 4 and 5 as these sections are related to general requirements for all developments and specific controls for both residential and non-residential uses.

Specific design details addressed to achieve compliance with BCC's Refuse PSP requirements is located in *Appendix A*.

## 2.2. Anticipated Refuse Volumes

The refuse volumes utilised for the calculation of the required residential refuse storage area are based on Brisbane City Council's standard rated entitlement. The entitlement is unchanged from the freestanding dwelling rate regardless of dwelling size. The rated entitlement applied to refuse calculations below is a requirement for development consent and not reflective of actual refuse generation.

A residential collection frequency of 3 times per week has been established for both general waste and commingled recycling in line with BCC's 'Residential (on-site bulk) service frequency and compaction requirement' guidelines.

The generation rates and service frequency used for the calculation of non-residential refuse produced have been applied based on rates prescribed by Brisbane City Council to achieve compliance. As a retail centre, a mix of refuse generation rates have been applied to refuse generation calculations. The tenancy mix of food & beverage tenancies to specialty retail or service provider use is based on the targeted tenancy mix identified by the client and as depicted on architectural drawings. A 7-day trading week has been assumed for all non-residential uses.

A maximum non-residential collection frequency of 3 days per week for any individual stream has been established. The established frequency represents the maximum permissible service frequency for non-residential uses within an 'Mixed-Use' Zone as specified in 'Table 2 – Non-residential service frequency requirement' of the Refuse PSP.

Table 2.2 outlines the standard refuse generation rates utilised. Table 2.3 details the further separation of the recommended 'General Waste' and 'Recycling' generation rates into additional streams by percentage splits. The percentage splits have been applied in line with the expected refuse composition of each tenancy use.

Table 2.4, Table 2.5 and Table 2.6 outline the refuse generation volumes for the residential and non-residential components of each building which form the basis for waste storage area design and sizing.

Table 2.2: Refuse Generation Rates

Generation Rate	Applied To	Measure	General Waste	Recycling	Days of Operation
Residential	All Residential Units	L / Unit / Week	240	240	N/A
Food and Drink Outlet (if greater than 150m <sup>2</sup> )	Retail – Restaurant	L / 100m <sup>2</sup> / Day	660	200	7
Specialised Grocer	Retail – Grocer	L / 100m <sup>2</sup> / Day	240	120	7
Retail Shop – Non-food	Retail – Bottle Shop	L / 100m <sup>2</sup> / Day	25	200	7
Butcher / delicatessen / florist / seafood shop	Retail – Bakery	L / 100m <sup>2</sup> / Day	80	50	7
Hairdresser / barber	Retail – Hairdresser	L / 100m <sup>2</sup> / Day	60	60	7

Table 2.3: Non-Residential Refuse Composition Splits

Area Description	General Waste		Recycling		
	General Waste	Food Waste	Commingle Recycling	Paper / Cardboard	CDS*
Restaurant	60%	40%	20%	70%	20%
Grocer	80%	20%	20%	80%	0%
Bottle Shop	100%	0%	10%	90%	0%
Bakery	60%	40%	20%	70%	10%
Hairdresser	100%	0%	100%	0%	0%

\*Container Deposit Scheme (CDS) eligible containers

Table 2.4: Refuse Calculations Building 1 – East

Area Description	Measure	Quantity	General Waste L/Week	Commingle Recycling L/Week
Residential Apartments	Unit	101	24,240	24,240
<b>Total Weekly Volumes Compacted (L / Week)</b>			<b>8,080*</b>	<b>N/A</b>
<b>Volumes per Day (L / Day)</b>			<b>1,154*</b>	<b>3,463</b>
<b>Volumes per Collection (L / Collection)</b>			<b>2,693*</b>	<b>8,080</b>
Collection and Equipment Details	Collections per Week		3	3
	Storage Capacity		3 Days	3 Days
	Equipment Size		1,100L	1,100L
	Equipment Quantity Required		2.45	7.35
	Equipment Quantity Provided		3 + 1	7 + 1

\*Compaction ratio of 3:1 used for calculation purposes

Table 2.5: Refuse Calculations Building 2 – North

Area Description	Measure	Quantity	General Waste L/Week	Commingle Recycling L/Week
Residential Apartments	Unit	75	18,000	18,000
<b>Total Weekly Volumes Compacted (L / Week)</b>			<b>6,000*</b>	<b>N/A</b>
<b>Volumes per Day (L / Day)</b>			<b>857*</b>	<b>2,571</b>
<b>Volumes per Collection (L / Collection)</b>			<b>2,000*</b>	<b>6,000</b>
Collection and Equipment Details	Collections per Week		3	3
	Storage Capacity		3 Days	3 Days
	Equipment Size		1,100L	1,100L
	Equipment Quantity Required		1.82	5.45
	Equipment Quantity Provided		2 + 1	6 + 1

\*Compaction ratio of 3:1 used for calculation purposes

Table 2.6: Combined Non-residential Refuse Calculations

Area Description	Measure	Quantity	General Waste L/Week	Food Waste L/Week	Commingle Recycling L/Week	Paper / Cardboard L/Week	CDS L/Week
Restaurant	GFA (m <sup>2</sup> )	181	5,017	3,345	253	1,774	507
Grocer	GFA (m <sup>2</sup> )	392	5,268	1,317	659	2,634	N/A
Bottle Shop	GFA (m <sup>2</sup> )	80	140	N/A	112	1,008	N/A
Bakery	GFA (m <sup>2</sup> )	67	225	150	47	164	23
Hairdresser	GFA (m <sup>2</sup> )	64	269	N/A	269	N/A	N/A
<b>Total Weekly Volumes (L / Week)</b>			<b>10,920</b>	<b>4,812</b>	<b>1,340</b>	<b>5,580</b>	<b>530</b>
<b>Volumes per Day (L / Day)</b>			<b>1,560</b>	<b>687</b>	<b>191</b>	<b>797</b>	<b>76</b>
<b>Volumes per Collection (L / Collection)</b>			<b>3,640</b>	<b>1,604</b>	<b>1,340</b>	<b>1,860</b>	<b>530</b>
Collection and Equipment Details	Collections per Week		3	3	1	3	1
	Storage Capacity		3 Days	3 Days	7 Days	3 Days	7 Days
	Equipment Size		1,100L	240L	1,100L	1,100L	240L
	Equipment Quantity Required		3.31	6.68	1.22	1.69	2.21
	Equipment Quantity Provided		4	7	2	2	3

## 2.3. Refuse Bin, Equipment Requirements and Specification

Table 2.7, Table 2.8 and Table 2.9 outline the total number of bins and additional equipment required for the development based on the volume calculations above.

As actual refuse volumes may vary from assessment benchmarks or over time according to evolving waste streams and operation of the site, bin numbers and sizes may need to be altered to suit the building operation and occupant needs.

Table 2.7: Combined Residential Total Bin Requirements

Refuse Stream	Bin / Storage – Size or Type	Number Required
General Waste	1,100L	5 + 2 1 to remain beneath the chute discharge of each building during servicing
Commingled Recycling	1,100L	13 + 2 1 to remain beneath the chute discharge of each building during servicing

Table 2.8: Combined Non-Residential Bin Requirements

Refuse Stream	Bin / Storage – Size or Type	Number Required
General Waste	1,100L	4
Food Waste	240L	7
Commingled Recycling	1,100L	2
Paper / Cardboard	1,100L	2
CDS	240L	3

Table 2.9: Additional Equipment

Component	Description	Quantity	Capability / Specification - See Appendix A for further details
Residential	Dual Refuse Chutes	2 (1 per building)	Co-located refuse chutes for the disposal for general waste and commingled recycling. Disposal points provided on each habitable level. One chute system in each building. TTMC recommends a minimum 600mm chute diameter for commingled recycling applications.
	Integrated Chute Discharge Compactor	2 (1 per building)	For use with general waste only. Will have a capacity to achieve an average compaction ratio of 3:1. <i>Elephant's Foot Ceiling Mounted Chute Compactor used for architectural design purposes. Model with equivalent capabilities may be installed.</i>
	3 x 1,100L Bin Linear Conveyor	4 (2 per building)	Automates bin rotation beneath the chute discharge for both general waste and commingled recycling in each building. Reduces the overall level of building management intervention required. <i>Elephant's Foot 2 Bin Conveyor used for architectural design purposes. Model with equivalent capabilities may be installed.</i>
Non-Residential	Individual Stream Receptacles	TBD	Receptacles for the immediate disposal of refuse into separate streams. Typically, bins typically up to 60L in volume placed BoH in central bin stations. Further details in Section 2.4.1
	Refuse / Cleaners Trolleys	TBD	Used to assist in the manual transfer of refuse to the bulk bins in the refuse room for final disposal.
	Used Cooking Oil Storage	1 (If required)	Portable storage tank stored BOH. May be required for restaurant where fry vat equipment is installed.
	Refuse Weighing Scales – National Measurement Institute (NMI) Certified	TBD (Optional and recommended)	Recommended to assist in tracking of refuse weights prior to collection for improved data recording and weighted on-charging of disposal costs. Scales must maintain NMI certification. Either platform scales in loading dock or mobile scales for cleaners' trolleys.

## 2.4. Refuse Disposal

The tables in this section summarise general recommended disposal arrangements for frequently generated and infrequently generated refuse for each development component. Section 2.4.1 describes the frequently generated refuse streams that are generated in high volumes for any given period and require significant capacity for storage prior to collections. Section 2.4.2 describes the infrequently generated refuse streams that are generated in relatively low volumes, and where minimal provision for storage can be easily managed by collection frequency and ad hoc storage arrangements.

### 2.4.1. Frequently Generated Refuse

Table 2.10: Disposal of Frequently Generated Waste

Refuse Stream	Disposal Details
<b>WASTE</b>	
<b>General Waste</b>	<p><b>Residential</b></p> <p>Space for bins to store one day’s worth of generated refuse will be provided in each residential apartment. Each day or as required, general waste will be transferred by residents to the chute access hoppers on each habitable residential level in each building. The refuse chute will discharge directly into the bulk bins stored in the chute discharge room. The chute hopper doors will be colour-coded for easy identification and to support the separation of refuse streams. Instructions on the use of the chute system and accepted items in each stream will be required to be included in the resident apartment manual.</p> <p>Waste bins should always be lined with bags and the bags tied before removal. Operationally, bins used for general waste should be limited to 40L or less and not exceed the dimensions of the chute hoppers. Bins are typically positioned in a cupboard beneath the kitchen sink. Waste bins should be accompanied by a commingled recycling bin in order to facilitate separation of general waste and recycling.</p> <p>Receptacles will be placed in all communal areas where refuse will be generated such as the common amenity podium for collection and storage of at least one day of general waste. Bin quantities will be determined during the operational phase. A recycle bin will be positioned wherever a general waste bin is positioned to maximise recovery. Building management will assist with disposal of all refuse generated in communal areas.</p>
	<p><b>Non-Residential</b></p> <p>Tenancy operators will be required to provide receptacles for each separate refuse stream in a sufficient quantity to hold one days’ or peak service periods’ worth of refuse. After each day of operation or as required, refuse will be transferred by staff / cleaners to the non-residential refuse room and decanted into the appropriate bulk bins.</p> <p>The number of and location of bins required will be determined during tenancy fit out and careful consideration should be given to the placement and types of bins to optimise source separation.</p> <p>Food &amp; beverage tenancy waste will be captured by bins up to 90L in volume that will be placed within the kitchen or back-of-house area to meet the design or layout criteria of the cafe or restaurant operators.</p> <p>General waste from non-food-based tenancies is generated in lower quantities on a per customer basis than F&amp;B outlets. Bins should be placed according to the operational requirements of the tenant.</p>



Table 2.11: Disposal of Frequently Generated Recoverables

Refuse Stream	Disposal Details
<p><b>Organic (Food) Waste</b></p>	<p>Separating organic or food waste from general waste is recommended to reduce the total amount of general waste produced. Separation may be considered and begin at any stage during the operational phase of the development.</p> <p><b>Residential</b></p> <p>While BCC does not currently offer a food organics collection service to multiple unit dwellings, commercial options are available at additional cost.</p> <p>Alternatively, domestic composting equipment may be used for individual units or communally. Communal composting must be facilitated and managed by a building manager or caretaker to ensure correct usage.</p> <p>Where food waste is separated, caddy bins or bins less than 20L should be used in residential kitchens, for disposal of food waste. The bins are then transferred to the refuse room for collection. The content is then decanted in bulk bins or composting equipment provided. Transfer and collection should occur on a frequent basis to minimise odour amenity issues.</p> <p><b>Non-Residential</b></p> <p>Caddy bins or bins no larger than 60L should be used in high volume situations such as commercial kitchens, for disposal of food waste. The bins are then transferred to the refuse room for collection. The content is then decanted in bulk bins or processing equipment provided within the refuse enclosure.</p> <p>TTMC recommend food rescue services are considered for consumable but non-saleable food items.</p>
<b>RECYCLING</b>	
<p><b>Commingled, including</b></p> <ul style="list-style-type: none"> <li>• glass</li> <li>• aluminum</li> <li>• steel cans</li> <li>• tins</li> <li>• cardboard</li> <li>• semi rigid plastics</li> </ul>	<p>Items for recycling must not be bagged and disposed in loose form. This can be done by decanting the materials from the individual receptacles into the recycling chute. The refuse chute will discharge directly into the appropriate bulk bin stored in the chute discharge room. The chute hopper doors will be colour-coded for easy identification and to support the separation of refuse streams. Instructions on the use of the chute system and accepted items in each stream will be required to be included in the resident manual.</p> <p>Residents will access the central refuse storage room directly for disposal of all oversized recyclable materials, lifts will be utilised for vertical transfer.</p> <p>Residents will have receptacles within their individual units for collection and storage of at least one day of recycling. Recycling bins are typically placed under the kitchen sink next to the general waste bin.</p> <p>Recycling bins will usually be used for all recycling materials (commingled recycling). However, residents are encouraged to make use of the container refund scheme and separate eligible containers from the commingled recycling material (see below).</p> <p>Receptacles will be placed in all communal areas where refuse will be generated for collection and storage of at least one day of commingled recycling. Bin quantities will be determined during the operational phase.</p> <p><b>Non-Residential</b></p> <p>Commingled recycling from tenancies such as food and beverage outlets including restaurants, takeaways, cafés can be captured by bins up to 90L that will be placed within the kitchen or back-of-house area to meet the design or layout criteria of the café or restaurant operators.</p> <p>Recycling from general non-food retailing tenancies overwhelmingly consists of clean cardboard which should be collected separately from commingled recycling if large quantities are produced.</p> <hr/> <p>Container deposit / refund schemes are currently in place in Queensland. Various models exist including bottle return facilities and (automated) reverse vending machines.</p> <p>Occupants should be encouraged to separate containers that qualify for the schemes from the waste or recycling streams and send back to a return point. Storage space or dedicated bins within the units or refuse rooms can be provided.</p>
<p><b>Cardboard and Plastic (plastic film / low-density polyethylene / high density polyethylene)</b></p>	<p><b>Non-Residential</b></p> <p>Cardboard and plastics can be disposed separately from comingled recycling if large quantities are produced. Where separated, cardboard and plastics must not be mixed. They must be stored individually.</p> <p>Where possible, large cardboard boxes and plastic film or packaging should be removed from the refuse stream prior to going into the individual tenancies. This involves decanting at the loading dock and providing trolleys or stackable containers for use in transporting the decanted goods to each tenancy.</p>

## 2.4.2. Infrequent Waste

Table 2.12: Disposal of Infrequently Generated Waste

Refuse Stream	Disposal Details
<b>Garden Organics refuse / Green Waste</b>	<p>Garden organic refuse also referred to as green waste will be produced from landscaped areas or potted plants around this development. Green waste is produced largely on a weather or seasonal dependent basis and based on plant selections. Green waste is usually removed by the designated maintenance contractor. Interim storage is not provided.</p> <p>The engaged contractor will be required to send this material to a composting or resource recovery facility rather than to a landfill.</p> <p>Alternatively, where onsite composting occurs, green waste may be combined with food waste for composting. Output product may be reused in site landscaping where appropriately matured or pasteurised as outlined in <i>AS 4454-2003 Composts, soil conditioners and mulches</i>.</p>
<b>Hard Waste / Bulky Goods</b>	<p>Hard waste collections will be coordinated in line with BCC's hard waste collection arrangements for residential uses, and hard waste / bulky goods moved to the loading or a designated area for removal prior to collection. When storing bulky goods in a loading area, it is recommended that items are placed on a pallet for efficient loading via a pallet jack or forklift onto the RCV.</p> <p>Non-residential uses will utilise bulk bins provided for bulky waste disposal or make other coordinated collection arrangements where items are unsuitable for bulk bin disposal or where significant volumes are generated such as during tenancy refits.</p>
<b>Hazardous Waste - Batteries</b>	<p>Batteries are highly volatile and must be disposed of separately and never in the general waste or commingled recycling bins. TTM recommend a communal disposal point is provided by site management and located in the main lobby or each building or alternate easily accessible location for use by both residential and non-residential uses.</p>
<b>Hazardous Waste (paints, chemicals) Electronic Waste</b>	<p>It is expected that the building management assist residents or tenancy operators with disposal of hazardous or liquid waste and any paint or chemicals as required and requested. Hazardous waste must be handled with due care, separated and securely stored for collection by a specialist waste contractor. Please refer to local and QLD government websites for further information.</p>

## 2.5. Refuse Storage, Access and Rotation Requirements

All refuse will be stored within bins housed within dedicated refuse storage areas. Separate storage areas are provided for residential and non-residential uses. All refuse storage and servicing areas are provided on Ground Level.

A chute discharge room is provided directly beneath the chute termination in each building. The chute discharge rooms are designed to house the chute discharge equipment including bin rotation and compaction equipment.

Access to the chute discharge rooms will be restricted to building management or approved personnel only via the restricted distribution of keys / fobs and signage. TTMC recommend that a lock-out function be installed on the chute hopper doors where the chute hopper door cannot be accessed when the chute discharge room doors are opened. Installing a chute lock-out function assists in reducing potential for injury to the building manager / cleaners by unexpected falling objects.

Building management / caretaker will be responsible for the rotation of bins between storage points to ensure convenient access for all residents and maintain disposal capacity.

A secondary bin store, referred to as the 'resi waste room' on architectural drawings, is provided for the storage of the combined total of all bins required for both buildings between services and will also serve as the collection point. The resi waste room is co-located with the Building 1 – East chute discharge room, separated by internal partition.

Residents from both buildings will access the resi waste room for the disposal all refuse materials not suitable for chute disposal.

The collecting contractor will access the bin holding room for the retrieval of bins for collections servicing.

The resi waste room is sufficiently sized to accommodate all of the bins required for the development as outlined Table 2.7. The equipment listed in Table 2.9 is split between the 2 chute discharge rooms.

All refuse generated by the non-residential uses will be stored within the non-residential refuse room referred to as the 'retail waste' on architectural drawings. The non-residential room is provided separately to the residential refuse storage room and also directly adjoining the RCV loading area. A consolidated waste storage strategy is proposed where all non-residential uses within the development share the use of the communal bins provided within a single storage area for optimal efficiency in servicing cost and to control the number of RCV movements within the shared loading area.

Figure 2.1 shows the configuration for each of the chute discharge rooms as well as the resi waste room and Non-residential refuse room in context with the loading bay.

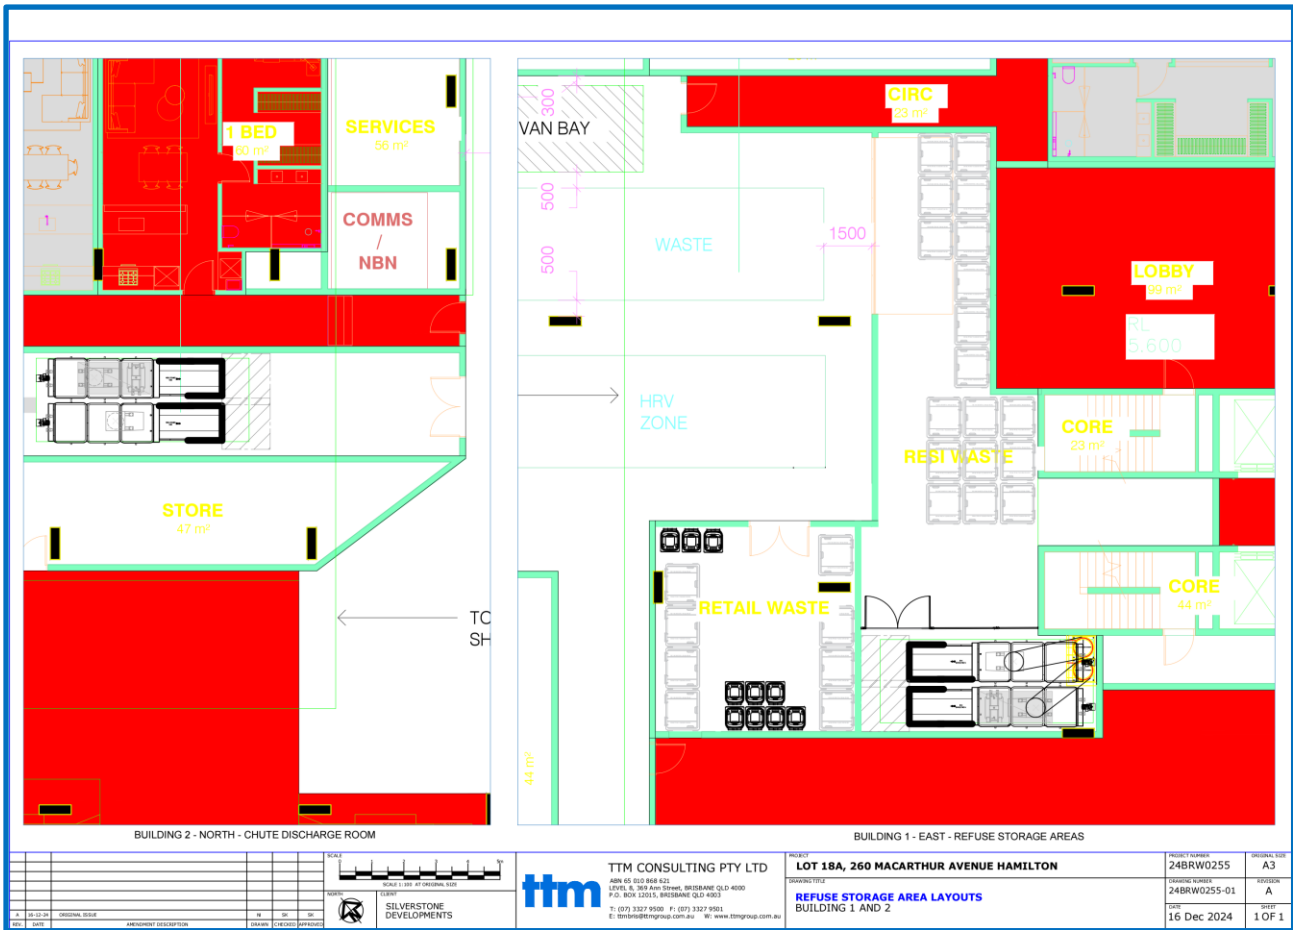


Figure 2.1: Refuse Storage Area Layouts

Table 2.13 outlines the refuse storage area design criteria addressed for each storage area in order to minimise odours, deter vermin, protect surrounding areas, and make it a user-friendly and safe area.

Table 2.13: Refuse Storage Area Design Requirements

<b>Positioning Considerations</b>
Positioned in immediate proximity or directly accessible to the designated loading point
Storage provided is conveniently accessible to residents for disposal or accessed via chutes.
Is in a purpose-built storage room which is designed to be unattractive to vermin and used solely for the storage of refuse leaving the site only.
Not located adjacent to or within any habitable portion of a building or place used in connection with food preparation (including food storage).
Is positioned away from entrances to shops or residential premises
Is over 5m from any door, window or fresh air intake within the development or any adjoining site.
<b>Visual Amenity Considerations</b>
Is enclosed on all sides except for the access points to ensure bins are not visible from a public place, neighbouring properties, passing vehicles or pedestrian traffic external to the site.
Is designed to minimise their visual impact on the surrounding areas.
<b>Functional Design Considerations</b>
Is of sufficient size to accommodate the bins with sufficient clearance around the combined bin area
Doors / shutters wide enough to allow for the easy removal of the largest container to be stored.
Permits unobstructed access for removal of the containers to the service point.
The height of the bin storage area allows for waste bins to be opened and closed.
Does not have any steps or lips where bins are required to be moved.
Adequate artificial lighting.
Be fire rated and ventilated in accordance with the National Construction Code – Building Code of Australia.
<b>Bin Washing and Room Cleaning Considerations</b>
A hose cock provided inside each room for cleaning bins and the enclosures.
The walls, ceilings, floors and equipment are to be designed and constructed of impervious material with a smooth finish to allow for easy cleaning.
Coved at the intersection with the walls with coving integral to the floor.
The floors to be graded to fall to a drainage point.
Drainage points connected to sewer in accordance with trade waste requirements.
Roofed and designed to prevent entry by rainwater.

## 2.6. Refuse Transfer

Residents will transfer all refuse vertically via the dual refuse chutes. Building management may consider providing refuse trolleys to assist in the manual transfer of bulky recyclable items not suitable for chute disposal.

The building manager or caretaker will be responsible for the transfer of bins between the storage points to maintain disposal capacity beneath the chutes. Additionally, to ensure all bins are presented to the central bin holding room prior to service.

Either designated tenancy staff or precinct cleaners will transfer all refuse generated from each of the non-residential tenancies to the non-residential refuse room directly.

The collecting contractor will collect all bins directly from the residential refuse room or non-residential storage area, manoeuvre to the RCV lifting mechanism and return bins to their respective rooms after service.

Figure 2.2 illustrates a potential transfer path for the transfer of bins to the central bin holding room by building management and non-residential disposal transfer path.

Table 2.14 demonstrates the criteria addressed in the design of the refuse transfer path.

Table 2.14: Refuse Transfer Path Design

The bins to be transferred via hard stand pathway.
Allows bins to be easily manoeuvred.
Does not impede traffic flow.
Does not extend through any habitable parts of a building or food premise
Does not have any lips, stairs or steps for bins to be manoeuvred easily.

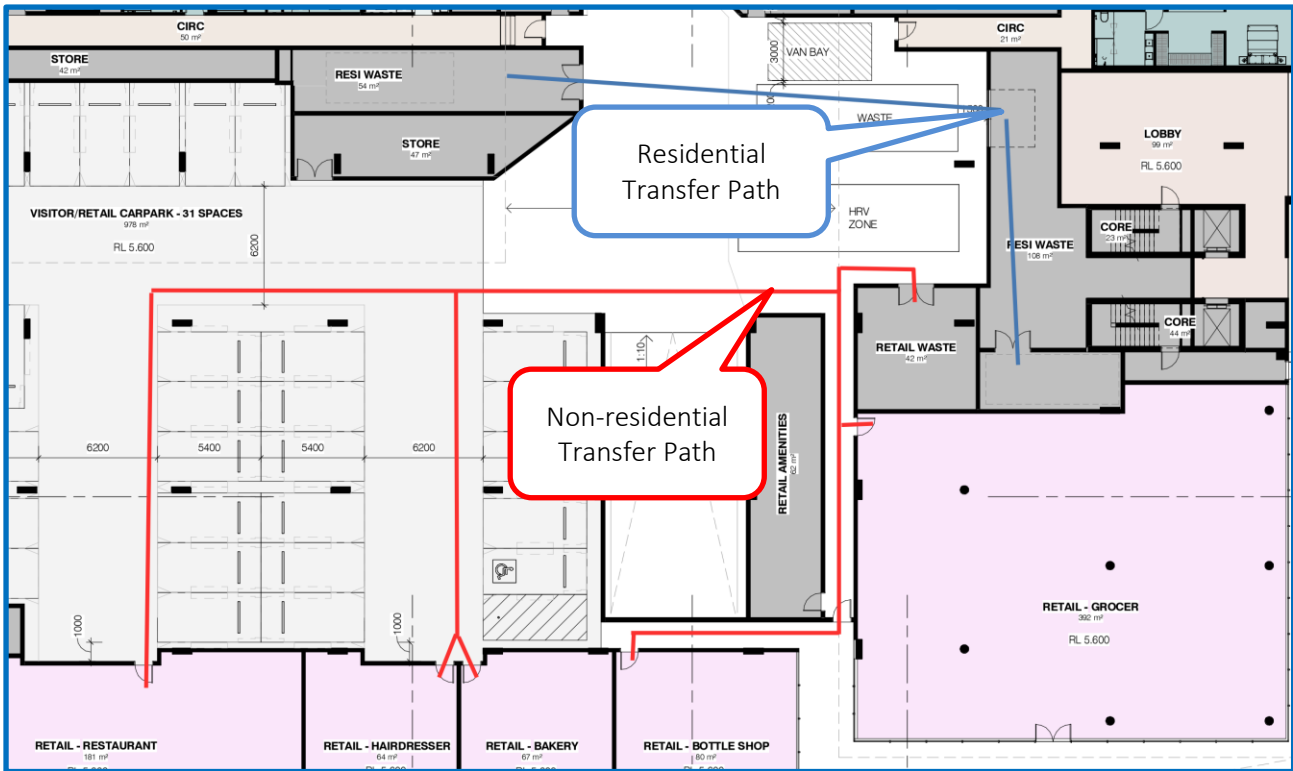


Figure 2.2: Refuse Transfer Path

Source: Carr, Project: Northshore Hamilton – Lot 18A, Drawing: Ground Level, Drawing Number: TP2-1002, Rev: 1



## 2.7. RCV and Bin Servicing Arrangements

All refuse will be collected by Rear Loading RCV. Council’s appointed collecting contractor will be responsible for the collection of all residential refuse. All non-residential refuse will be collected by private contractor however, the non-residential tenancy operators may elect to use engage Council’s appointed collecting contractor under commercial contract arrangement and align service days during residential servicing to reduce overall site vehicle movements.

All RCV’s enter site via the driveway crossover on Karakul Road and navigate the driveway ramp to the designated loading bay in a forward gear. RCV’s will perform a single reverse manoeuvre into the RCV loading bay immediately adjoining the refuse storage areas. Once the collections service is complete, RCV’s will exit site onto Karakul Road in a forward gear.

Once the bins have been serviced, they will be returned to the respective refuse storage area where building management staff / cleaners will clean the bins as required and rotate bins between refuse storage areas for everyday use.

Figure 2.3 demonstrates the ingress and egress RCV swept path manoeuvres for a 10.24m rear loading RCV as specified in BSD 3008. Further details on vehicle access and on-site manoeuvring can be found in the transport report submitted with the submission.

Table 2.15 demonstrates the features of the bin servicing area.

Table 2.15: Service Area Design

Has sufficient access and clearance for the waste and recycling collection vehicles to service the bins, including no overhead obstructions.
Allows bins to be serviced safely while minimising the impediment to vehicle movements during servicing.
Is clearly separated from car parking bays, footpaths and pedestrian access.
Is devoid of stairs, lips or ramps and allows bins to be manoeuvred easily.
Does not block the entry and exit to the property.
Is not adjacent to a kitchen or eating area for public use.
Is over 5m from any door, window or fresh air intake within the development or any adjoining site.
Is screened sufficiently to minimise the view of bins from neighbouring properties or passing vehicles and pedestrian traffic external to the site.
Is positioned away from entrances to shops or residential premises.

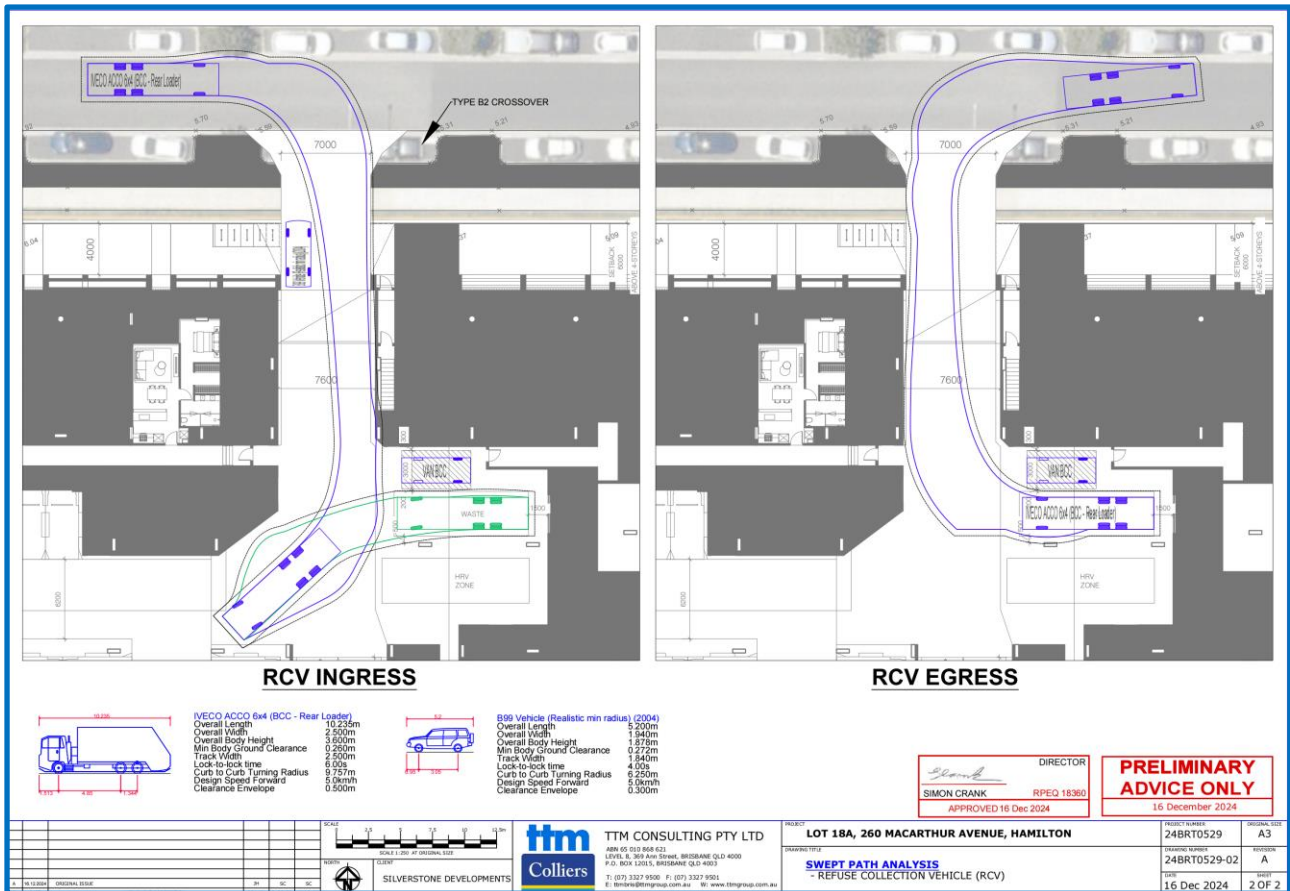


Figure 2.3: RCV Swept Path

## 3 Recommended Operational Refuse Management

**This section does not contain information relevant for building design assessment.**

This section relates to the outcomes and waste management practices of the development during the operational phase as recommended by TTMC. It is intended for use as a live document by the end user of the development to assist with the ongoing management of the development.

### 3.1. Anticipated Residential Refuse Volumes

TTMC have worked extensively with operating residential developments within the Brisbane local government area. This includes establishing typical volumes of refuse generated through volumetric assessment. TTMC have established a flat generation rate applicable to developments containing mixed unit sizes. This rate is used to provide more accurate recommendations relating to anticipated bin numbers and building management intervention through bin rotations beneath the refuse chute.

It should be noted that the recommendations and comments in this section are based on the maximum aggregate audit results of operational sites completed by TTMC and do not factor in potential demographic or socio-economic factors and therefore not site specific however, give an estimation of likely waste generation. Site specific auditing is recommended to establish actual generation and composition of refuse for this site. Site specific auditing allows refinement of the overall refuse strategy.

#### 3.1.1 Refuse Profile and Stream Separation

Refuse generated by residential uses including multiple dwelling residential apartments includes a substantial volume of food waste. TTMC recommend that food organic waste is separated from the general waste stream. Onsite composting or organics processing equipment should be considered within the final design and an area should be made available within the communal open space for the instigation of composting during the operational phase of the development. Where onsite composting or processing occurs, this must be undertaken through an onsite manager to ensure the correct use.

Alternatively, commercial collections may be undertaken by the development at an additional cost. BCC do not provide rating concessions for initiatives to reduce waste. Where commercial collections are undertaken this is an additional waste expense over BCC's waste rating charge.

TTMC recommend that Container Deposit Scheme (CDS) receptacles are also available for resident use, this may provide additional revenue to the development (such as social club funds) or be donated to charity. Single item recyclable streams as captured by CDS offer a higher value recyclable product than achieved through commingled recycling.

Similarly, consideration should be given to the separation of bulky cardboard. Oversized cardboard is a leading cause of blockages in recycling chute applications.

### 3.1.1. Recommended Residential Refuse Bins and Equipment

Table 3.1 outlines the number of bins and additional equipment that may be implemented where an additional level of sustainability and landfill diversion is sought. The recommended level of stream separation may be implemented at any stage during the occupational phase of the site.

These recommendations are provided to assist in the instigation of collection services and provided based on TTMC's recommended stream separation.

Additional services may be provided utilising the central bin holding room as proposed within the development application, with disposal facilitate through building management.

Table 3.1: Recommended Bin Requirements (Total)

Refuse Stream	Bin / Equipment - Type or Size	Bins Required	Storage Capacity Between Collections
General Waste	1100L	4 + 2 1 to remain beneath each chute discharge during servicing	3 Days
Commingled Recycling	1100L	4 + 2 1 to remain beneath each chute discharge during servicing	3 Days
CDS	240L	4	7 Days
Bulky Cardboard	1100L	2	3 Days
E-waste (Excluding batteries)	1100L	1	Ad Hoc
Mixed Batteries	Countertop Receptacle	2	Ad Hoc

Table 3.2 outlines the equipment processing capacity recommended where food organics composting is undertaken on site, processing capacity may be comprised of multiple processing modules.

Additionally, Table 3.2 provides a comparison in number of bins should standard commercial food organics collections be preferred. TTMC recommend storage intervals no exceeding two days between services where food waste is separated to prevent potential odour amenity issues.

Table 3.2: Food Organics Processing Capacity

Refuse Stream	Processing Capacity Per Day (Total)		
Food Organics	145kg		
	Bin / Equipment - Type or Size	Bins Required	Storage Capacity Between Collections
	240L	5 (2 in building 1 & 3 in building 2)	2 Days

## 3.2. On-going Management

The tables below relate to a cycle of ongoing implementation, operation, review and amendment of the refuse strategy. These tables are intended to serve as a live document to be completed and updated during the operational phase of the development and therefore intentionally left blank.

Responsibilities will be assigned for all on-going refuse management related activities during the operation of the development. TTMC recommend the appointment of dedicated personnel to champion refuse management and sustainability. The following lists (Table 3.3 to Table 3.5) are designed to help manage and assign responsibilities and monitor the refuse operations. On-going management of the refuse strategy will maintain efficient services, a safe environment and improve on sustainability outcomes.

### 3.2.1. Implementation Phase

Refuse management tasks during the implementation of the refuse strategy are required prior to and during the early stages of building occupancy. An opportunity to revisit these tasks is provided at set intervals with the review of the refuse strategy.

Table 3.3: Implementation Checklist

Task	Assigned	Remarks
<p><b>Verify the as-built form of all refuse related areas.</b></p> <p>This task does not refer to building certification but is typically undertaken by a specialist waste consultant prior to building certification. This provides an opportunity to identify variances in building form versus design and recommend alternate or mitigating refuse management strategies.</p> <p>This task may also be required during significant building refits or renovation.</p>		
<p><b>Appoint personnel to oversee or undertake refuse management tasks.</b></p> <p>A building or facilities manager is typically appointed undertakes most operational tasks, engaging contractors for specialist tasks.</p>		
<p><b>Conduct internal safety review.</b></p> <p>An internal safety review is required to be undertaken to identify potential hazards in the implementation of the refuse strategy and risk mitigation opportunities.</p> <p>This includes the use of any refuse management equipment installed, as well as refuse transfer paths</p>		
<p><b>Development of policy and procedures</b></p> <p>Must be undertaken after safety review and abide by all relevant occupational health and safety legislation, regulations and guidelines to ensure site safety for visitors, staff and contractors.</p> <p>Also includes assessment of any manual handling risks and preparation of a manual handling control plan for waste and bin transfers.</p>		

Task	Assigned	Remarks
<p><b>Engage refuse collection contractors.</b></p> <p>Either council's collections contractor or a private contractor must conduct a site visit for the purposes of risk assessing the site prior to conducting services. Contractors must ensure that a full risk assessment of equipment, surfaces and related gradients is complete and procedural documentation is provided to the appropriate personnel.</p> <p>RCV manoeuvrability testing and the establishment of service frequency and timing is also undertaken at this time.</p>		
<p><b>Install signage in all refuse disposal and storage points.</b></p> <p>Signage is required to be installed to educate building occupants on location of disposal and refuse storage points. Additionally, to identify the accepted items disposed of in each refuse. The installed signage should be colour coded in accordance with AS 4123.7 – 2006 Mobile waste containers. Examples of signage are provided in the appendices.</p>		
<p><b>Leasing Agreements</b></p> <p>All leasing contracts should contain clauses pertaining to waste management arrangements and use of any associated equipment.</p>		
<p><b>Education and Training.</b></p> <p>Provision of equipment manuals, induction, training, health and safety procedures, risk assessments and personal protective equipment (PPE) to all staff / contractors associated with all waste management activities in order to control hazards.</p> <p>The step is repeated through the operational phase of the development as required due to changes in users or personnel.</p>		
<p><b>Consider fit out and move-in refuse.</b></p> <p>Higher volumes of waste are generated during the initial occupant move-in or final fit out. This typically includes large volumes of cardboard. Additional bins or collections may be required.</p> <p>This also applies to high turnover events and refits or renovation.</p>		
<p><b>Baseline Refuse Auditing</b></p> <p>A baseline audit for non-residential uses once the development reaches 80% occupancy undertaken by a specialist waste consultant is recommended to identify refuse volumes and stream composition. This information is then used to establish potential recoverable material percentage based on initial waste practices and set recycling rate targets.</p>		
<p><b>Establish Baseline Targets</b></p> <p>The baseline audit results should be used to establish baseline landfill reduction and recycling rate targets. Baseline targets should be achievable with a view to continual improvement to enable the celebration of success and promote buy-in by building occupants.</p>		

### 3.2.2. Occupation / Operational Phase

Refuse management tasks during the occupation or operational phase of the development relate to the day to day and business as usual operational tasks that must be undertaken to execute the refuse strategy.

Table 3.4: Occupation / Operation Checklist

Task	Assigned	Remarks
<p><b>Facilitate disposal from communal areas, public realm and tenancies.</b></p> <p>Appointed building manager / caretaker is required to transfer refuse generated in communal areas and the public realm to the refuse storage area for final disposal, this includes litter removal.</p> <p>Best practice operations include having dedicated cleaning staff assigned to handle all waste generated, rather than tenancy staff. This results in maximum recovery of available streams.</p>		
<p><b>Manage rotations of bins to ensure convenient access.</b></p> <p>Check bin fill levels and rotate / swap bins as required. Sufficient capacity must be provided for the disposal of all streams at all times including reduced personnel on site (such as weekends or public holidays). Where equal access to a refuse stream is not maintained, other streams may be contaminated leading lost resources.</p>		
<p><b>Manage bin transfers to agreed servicing point.</b></p> <p>Bins are required to be presented to the temporary holding or agreed servicing point prior to the scheduled service time and ensure the area is free from obstruction. Late bin placement or servicing obstruction may lead to missed bin services.</p>		
<p><b>General cleaning.</b></p> <p>Regular cleaning and maintenance of all refuse management facilities is important to maintain a safe and hygienic environment for visitors, staff and contractors.</p> <p>General cleaning is required for all refuse holding and transfer areas including</p> <ul style="list-style-type: none"> <li>• Refuse bins, rooms and storage areas</li> <li>• Refuse transfer areas including lifts and staircases</li> <li>• Any other refuse management equipment</li> </ul>		
<p><b>Perform spot checks on bin contents and refuse streams.</b></p> <p>Building management regularly check for correct bin use and stream contamination. Early intervention prevents the development of poor practice and lost resources. Feedback and education is provided to the relevant parties (see below).</p>		
<p><b>Ongoing education and communication.</b></p> <p>On-going education is important to ensure people continue to use the facilities as originally intended and to avoid ongoing contamination of recoverable refuse streams.</p> <p>Appointed personnel should be actively involved in education of occupants and encouraging participation in recycling activities. Widespread communication of the achievements of the refuse strategy and areas for improvement encourage participant buy-in.</p>		



### 3.2.3. Review and Amendment Phase

The review and amendment refuse management tasks relate to tasks undertaken on a routine (e.g. quarterly, bi-annually or annually) or ad hoc basis. At the completion of the review and amendment phase, the cycle restarts with the implementation of the amended refuse strategy.

Table 3.5: Review and Amendment Checklist

Task	Assigned	Remarks
<p><b>Coordination of specialised cleaning contractors as required.</b> Typical specialised cleaning services may include cleaning internal areas of compaction equipment (if selected); this reduces risk of blockage, odour and risk of fire.</p>		
<p><b>Maintenance and servicing of refuse management equipment as per schedule.</b> Frequency depends on equipment, building operation and manufacturer specification. Routine maintenance reduces downtime and detrimental impact of unscheduled equipment breakdown.</p>		
<p><b>Coordination of specialised equipment contractors as required.</b> May extend to ad hoc services requiring specialist equipment such as bulky / hard waste removal.</p>		
<p><b>Internal safety review.</b> Routine safety reviews are required to identify changes to the site, work practices or legislation that may impact existing policies and procedures. Reviews should include visual inspection of equipment and user PPE. Any policy or procedure updates arising from a safety review must be immediately communicated.</p>		
<p><b>Audit operational refuse volumes and composition.</b> As similarly undertaken at the beginning of occupancy a review by a specialist waste consultant is recommended to identify refuse volumes and stream composition. This information is then used to establish potential recoverable material percentage and identify opportunities for improvement in refuse strategy. Alternatively, an internal audit may be undertaken by visual inspection during on-site waste management handling activities. For example, cleaners may observe contents of waste receptacles when decanting caddies in larger bins and recording results, this method is less accurate than a comprehensive audit, however, give immediate indicative results and may be undertaken on an ongoing basis.</p>		
<p><b>Review bin quantities and refuse management equipment.</b> Reviewing bin quantities and equipment is required ensure operational sustainability of refuse volumes and equipment remains fit for purpose. Consideration should be given where alternate equipment may provide improved outcomes. This review may form part of the external audit process (above) as recommendations made.</p>		

Task	Assigned	Remarks
<p><b>Review service frequency and methodology on 6 monthly intervals with collecting contractor.</b></p> <p>The service frequency and service methodology should be reviewed once development is fully occupied and on rolling 6 monthly basis to ensure the optimum cost efficiency in services provided and explore options for additional services.</p> <p>Any potential changes to the bin numbers or bin sizes should be made in liaison with the appointed contractor to confirm cost or contract implications.</p>		
<p><b>Review of recycling rate target to target continual improvement.</b></p> <p>Once benchmarked performance has been assessed against the existing targeted recycling rate a new target can be established that strives for continual improvement.</p> <p>Any changes in targeted recycling rates and the achievements of the refuse strategy should be widely communicated to all uses.</p>		
<p><b>Update and amend OWMP based on review outcomes.</b></p> <p>On completion of the refuse strategy review the OWMP should be updated to reflect refuse strategy amendments and to enable implantation of refuse strategy.</p>		

## Appendix A Council PSP Compliance Checklist

BCC SC6.26 Refuse Planning Scheme Policy		
Item	Requirement	Compliance / Comment
<b>Section 2 – General Requirements</b>		
(1)	A written design proposal for waste collection is to be provided giving full details of the proposed solution, bin sizes, number of bins and the storage and collection areas, frequency of collection and the refuse collection vehicle size. Table 1 provides the dimensions and types of bins. Table 3 provides the specifications and types of collection vehicles.	Details provided in this OWMP.
(2)	The collection of refuse is to be considered during the planning phase of development. This includes the physical manoeuvring area for the refuse collection vehicle and the bin storage areas and collection points. Access for other road users including pedestrians, cyclists, motorists and other service providers (e.g. postal) is to be maintained.	Considerations provided within this OWMP.
(3)	The type of refuse service that is to be used (domestic or commercial) is identified, including whether the refuse collection vehicle is to be front loading, side loading or rear loading (sufficient height must be available).	Domestic refuse collected by rear loading RCV. 3.6m available.
(4)	Uses with high trip-end densities provide a transport impact assessment report in accordance with the Transport, access, parking and servicing planning scheme policy with an assessment of refuse storage and collection included.	See Transport Engineering documentation for details.
(5)	Where a Refuse Collection Vehicle (RCV) is required to manoeuvre from an on-site position, allow an additional 500mm clearance for vehicle turning dimensions (swept paths) and servicing. Three clear swept path lines must be demonstrated for the RCV, namely wheel path, vehicle body path and 500mm clearance path.	See Transport Engineering documentation for details.
(6)	The waste collection system is to achieve the following outcomes: <ul style="list-style-type: none"> <li>a. both the customer and service provider can access the bin storage area and collection point conveniently;</li> <li>b. the location, design and operation of the bin storage and collection system do not have unreasonable adverse acoustic, odour or visual impacts on the development, surrounding properties or the streetscape;</li> <li>c. the supply and servicing of either mobile garbage bins or bulk bins or refuse compactors complies with the requirements of this planning scheme policy.</li> </ul>	Complies  Complies – Collection service will be undertaken wholly on site.  Complies
<b>Section 3 - Access and Manoeuvrability</b>		
(1)	The manoeuvring of the refuse collection vehicle is undertaken in a safe and efficient manner, without detrimental impacts to pedestrian amenity or safety, Council or private infrastructure or the function of the road network.	See Transport Engineering documentation for details.
(2)	For multiple dwelling development accessed via a local, neighbourhood, district or suburban road, the refuse collection vehicle may enter the site in a reverse gear in a single movement.	Forward-in, forward- out manoeuvring provided.
(3)	For multiple dwellings development accessed via an arterial road, or where the refuse collection vehicle cannot reverse onto the site in a single movement, the refuse collection vehicle must enter and leave the site in a forward gear.	Forward-in, forward- out manoeuvring provided.
(4)	For development (other than a multiple dwelling) accessed via an arterial, suburban, district or minor road adjacent to an intersection with a major road, the refuse collection vehicle must enter and leave the site in a forward gear.	Forward-in, forward- out manoeuvring provided.
(5)	Where refuse collection is from an on-site position, the area trafficked by the refuse collection vehicle must comply with requirements under the Transport, access, parking and servicing planning scheme policy including a minimum aisle/carriageway width of 6.5m wide.	Complies
(6)	For detached dwellings on rear lots, pavements/carriageways trafficked by a refuse collection vehicle have a minimum width of 5.5m.	N/A

<b>Section 3 - Access and Manoeuvrability - Continued</b>		
(7)	All entry and exit points are of a width and design that allows for sufficient ingress and egress for the refuse collection vehicle, including a minimum 6.5m crossover which is free from overhead projections inclusive of gardens or trees.	Complies
(8)	To maximise safety, the distance required for refuse collection vehicles to reverse on-site is minimised. Where on-site turnaround of the refuse vehicle cannot be achieved, the bin storage area and collection point is located within 20m of the street frontage.	Complies – Minimal reversing required.
(9)	Turnaround facilities for a refuse collection vehicle exist or are provided for where involving staged subdivision developments or where development is located on a no through road. Turning and manoeuvring facilities for refuse collection vehicles are provided to meet design requirements for the vehicles identified in Table 3.	N/A
(10)	Subdivision layouts are to provide for the safe and efficient operation and manoeuvring of a side-lift loading refuse collection vehicle. Layouts that require a refuse collection vehicle to reverse more than 20m are to be avoided. Where the provided transport network results in a stub road for a proposed future road connection, interim turnaround facilities must be provided in compliance with the Transport, access, parking and servicing planning scheme policy and the Infrastructure design planning scheme policy.	N/A
(11)	Adequate lift clearances are provided to overhanging trees and wires in accordance with Table 3.	Complies – 3.6m provided
(12)	The required vertical and horizontal clearances are provided for the service to operate safely and efficiently. Operational clearance dimensions are shown in Table 3 for various types of collection arrangements.	Complies
(13)	Access for a refuse collection vehicle to the collection point is maintained at all times.	Servicing occurs in shared loading bay.
(14)	Where non-residential development is proposing to use an alternative design vehicle other than those named in Table 3, written confirmation from the proposed licensed waste collection contractor giving full details of the bin size and the refuse collection vehicle size must be provided.	N/A
(15)	In instances where the gradient of the on-site manoeuvring area is greater than 5% (1:20), the pad that the collection vehicle will stand on while accessing refuse bins at the collection point, is to have a maximum gradient of 2% (1:50).	Complies – RCV will stand on a flat grade for servicing.
<b>Section 4 - Residential Refuse Collection</b>		
(1)	Residential development must be serviced by Council or their appointed collection contractor.	Complies
(2)	Residential development is to provide sufficient capacity for 240L of refuse and 240 or 360L of recycling per dwelling, allowing for one collection per week.	Servicing 3 times per week is proposed.
(3)	Residential development is to utilise kerbside collection where the locations for both the bin storage area and kerbside collection point can be appropriately accommodated in accordance with section 4.1.	Greater than 10 dwellings kerbside collection not proposed.
(4)	On-site collection must be provided for in the following cases: <ul style="list-style-type: none"> <li>a. the development cannot accommodate external (fronting public road) kerbside collection; or</li> <li>b. the development comprises greater than 10 dwellings; or</li> <li>c. where the road verge is not properly shaped to the standard 1:50 gradient and a minimum of 2.5m wide or where the longitudinal road gradient is greater than 1:10.</li> </ul>	Complies
(5)	Refuse and recycling collection for a mixed use development ensures residential and commercial bins are stored separately with separate access to each.	Complies
<b>Section 4.1 - Kerbside Collection (MGB's) – N/A Greater than 10 dwellings, kerbside collection not proposed</b>		

Section 4.2 – On-site Collection (Bulk Bins) – This section applies to Residential services		
(1)	In accordance with section 4, development will avoid adverse impacts to residents, pedestrians and roads users by providing sufficient capacity to achieve one collection per week while ensuring sufficient refuse and recycling capacity is provided to meet the needs of residents.	Complies
(2)	An on-site dedicated pedestrian route is provided and is separate from the required vehicle manoeuvring area to ensure pedestrian safety is protected. The pedestrian route is to provide access from the site's frontage to the development and will have a minimum width of 1.2m.	Complies
(3)	Bulk bins of 1.1m <sup>3</sup> or less are positioned so that collection personnel do not have to move them more than 5m. If a gradient is evident, speed bumps are provided to stop bulk bins from rolling away from the collection point.	Refuse storage immediately adjoins servicing area.
(4)	Bulk bins of 1.5m <sup>3</sup> or more are positioned so that front-lift refuse vehicles can drive directly to the container without relocating the bulk bin. If this cannot be achieved due to physical constraints, then the bulk bins are not moved more than 3m from the storage area to the collection point.	N/A – 1.1m <sup>3</sup> bins proposed.
(5)	The storage areas for bulk bins are: <ul style="list-style-type: none"> <li>a. contained in a roofed and wholly screened enclosure or room of sufficient size for the bulk bin quantity required;</li> <li>b. easily accessible for residents and for the required servicing of bins;</li> <li>c. screened from neighbouring properties to mitigate odour, amenity and noise;</li> <li>d. of a design to mitigate the harbourage of vermin or attraction of scavenging animals;</li> <li>e. provided with natural or temperature-controlled ventilation if in an enclosed room;</li> <li>f. of a design which maintains a minimum internal vertical clearance of 2.1m;</li> <li>g. kept clear of obstructions, such as fixed bay separators, that impede the ability to change from existing bin sizes or which otherwise limit future refuse collection options;</li> <li>h. are not to contain other amenities such as air-conditioning compressors, hot water systems or electrical hubs.</li> </ul>	Complies
(6)	Best practice may include allowing additional space for the storage of extra containers to separately store either organic waste or other recyclables in the future.	Adequate space provided.
(7)	If a refuse or recycling chute is provided: <ul style="list-style-type: none"> <li>a. it is to be constructed to allow refuse to fall into the centre of the bin;</li> <li>b. it is to have a door / lid to ensure clean changeover of bins;</li> <li>c. the chute room must be of suitable size to allow for an additional bin/s to remain under the chute discharge/s at all times;</li> <li>d. separate chutes and bulk bins are to be used for each waste stream;</li> <li>e. the room containing the chute and bin or compactor excludes all but authorised personnel;</li> <li>f. design best practice may include developments greater than 15m (3 storeys) in height utilising twin chutes or single chute dual stream technology with openings on each residential floor to enable chute disposal of both refuse and recycling.</li> </ul>	Complies
(8)	Environmental best practices may also include the installation of a trapped waste connection to the sewer system.	Complies

Section 5 – Non-Residential Refuse Collection		
(1)	Non-residential development is to provide sufficient capacity to achieve low-frequency servicing in line with Table 2.	Maximum 3 services per week proposed.
(2)	Refuse generation rates for specific uses are provided in Table 4. These figures are to be used to calculate the refuse and recycling capacity required. <i>Note—Where a refuse generation rate is not defined in Table 4, the applicant is responsible for providing evidence in support of the refuse generation proposed.</i>	Complies
(3)	Sufficient information is provided to demonstrate that refuse collection can occur in an efficient and safe manner on site without adverse impact on amenity (acoustic, odour or visual impacts) and pedestrian and vehicular traffic.	Complies
(4)	This information may include evidence from a refuse collection contractor to demonstrate that collection will occur outside normal service/delivery or business times, where seeking permission to allow a refuse collection vehicle to use service bays or parking spaces on the site for access.	Details on servicing provided within this OWMP.
(5)	Bulk bins of 1.1m <sup>3</sup> or less are positioned so that collection personnel do not have to move them more than 5m. If a gradient is evident, speed bumps are provided to stop bulk bins from rolling away from the collection point. <i>Note—Standard design arrangements, including gradients, are contained in the Transport, access, parking and servicing planning scheme policy.</i>	Complies
(6)	Bulk bins of 1.5m <sup>3</sup> or more are positioned so that front-lift refuse collection vehicles can drive directly to the container without relocating the bulk bin. If this cannot be achieved due to physical constraints, then the bulk bins are not moved more than 3m from the storage area to the collection point.	N/A .24m <sup>3</sup> and 1.1m <sup>3</sup> bins proposed.
(7)	The storage area for refuse bins are: <ul style="list-style-type: none"> <li>a. contained either within a building or a roofed and wholly screened enclosure of sufficient size for the bin quantity required. Table 1 provides the bin types and dimensions;</li> </ul> <i>Note—Where screening is utilised to form part or all of a refuse storage area, the screening is to have a maximum of 25% openings, with a maximum opening dimension of 50mm, and are to be permanently fixed, durable and maintainable.</i> <ul style="list-style-type: none"> <li>b. easily accessible for occupants and for the required servicing of bins;</li> </ul> <i>Note—Allow for at least an additional 0.5m clearance surrounding each container, or for the storage of multiple bins, 1.5m clearance around the combined bin area (whichever is lesser).</i> <ul style="list-style-type: none"> <li>c. screened from neighbouring properties to mitigate impacts from odour, amenity and noise;</li> <li>d. of a design to mitigate the harbourage of vermin or attraction of scavenging animals;</li> <li>e. provided with natural or temperature-controlled ventilation if in an enclosed room;</li> <li>f. of a design which maintains a minimum internal vertical clearance of 2.1m;</li> <li>g. kept clear of obstructions, such as fixed bay separators, that impede the ability to change from existing bin sizes or which otherwise limit future refuse collection options;</li> <li>h. are not to contain other amenities such as air-conditioning compressors, hot water systems or electrical hubs.</li> </ul>	Complies
(8)	Best practice may include allowing additional space for the storage of extra containers to separately store either organic waste or other recyclables in the future.	Refuse area sufficiently sized.
(9)	Where disposal of industrial or commercial liquid waste by discharge to a road tanker, the road tanker is to be wholly on-site during collection.	Complies



## Appendix B Site Plans, Drawings and Swept Path Analysis





Builders / Contractors shall verify all dimensions before any work commences. Dimensions shown are nominal. Figured dimensions shall take precedence over scaled dimensions. Any discrepancies are to be made known to the Architects / Designers studio prior to any works commencing on site. All shop drawings shall be submitted for review and manufacture shall not commence prior to the return of stamped shop drawings.

© Carr Architecture ABN 47 099 953 205  
 © Carr Interiors ABN 56 126 212 575

GENERAL NOTES

KARAKUL ROAD

ANGORA ROAD

MACARTHUR AVENUE



CROSS-BLOCK LINK PARK  
 REFER TO LANDSCAPE  
 DOCUMENTATION


COMMUNAL OUTDOOR SPACE - REFER TO LANDSCAPE ARCHITECTS DOCUMENTATION

SITE 18B SHOWN  
 INDICATIVELY ONLY

1 16/12/2024 DA ISSUE

Rev Date Chkd Reason for Issue

Based on Drawings Received:

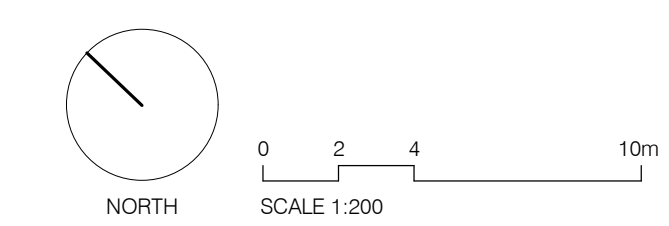

TOWN PLANNING ISSUE

NOT FOR CONSTRUCTION

Level 4  
 31 Flinders Lane  
 Melbourne VIC  
 3000 Australia

+61 3 9665 2300

melb@carr.net.au  
 carr.net.au

Project NORTHSHORE HAMILTON

SITE 18A

Title LEVEL 1 PODIUM

Date 16/12/2024 Project No 24047

Scale @ A1 1:200 Dwg No TP2-1003

Drawn By CE/AK Chkd CE Rev 1




Builders / Contractors shall verify all dimensions before any work commences. Dimensions shown are nominal. Figured dimensions shall take precedence over scaled dimensions. Any discrepancies are to be made known to the Architects / Designers studio prior to any works commencing on site. All shop drawings shall be submitted for review and manufacture shall not commence prior to the return of stamped shop drawings.

© Carr Architecture ABN 47 099 953 205  
 © Carr Interiors ABN 56 126 212 575

GENERAL NOTES



1	16/12/2024	DA ISSUE
Rev	Date	Chkd Reason for Issue
Based on Drawings Received:		

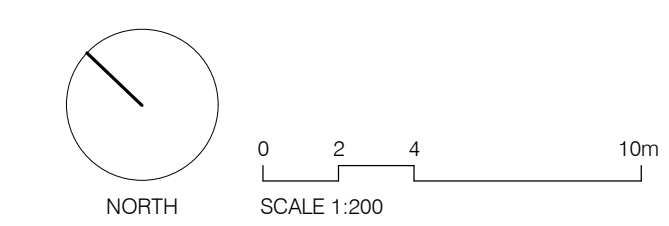


TOWN PLANNING ISSUE  
 NOT FOR CONSTRUCTION

**carr**


Level 4  
 31 Flinders Lane  
 Melbourne VIC  
 3000 Australia

+61 3 9665 2300  
 melb@carr.net.au  
 carr.net.au

Project	NORTHSHORE HAMILTON	
	SITE 18A	
Title	LEVEL 2-8 (TYP. TOWER)	
Date	16/12/2024	Project No 24047
Scale @ A1	1:200	Dwg No TP2-1004
Drawn By	CE/AK Chkd CE	Rev 1

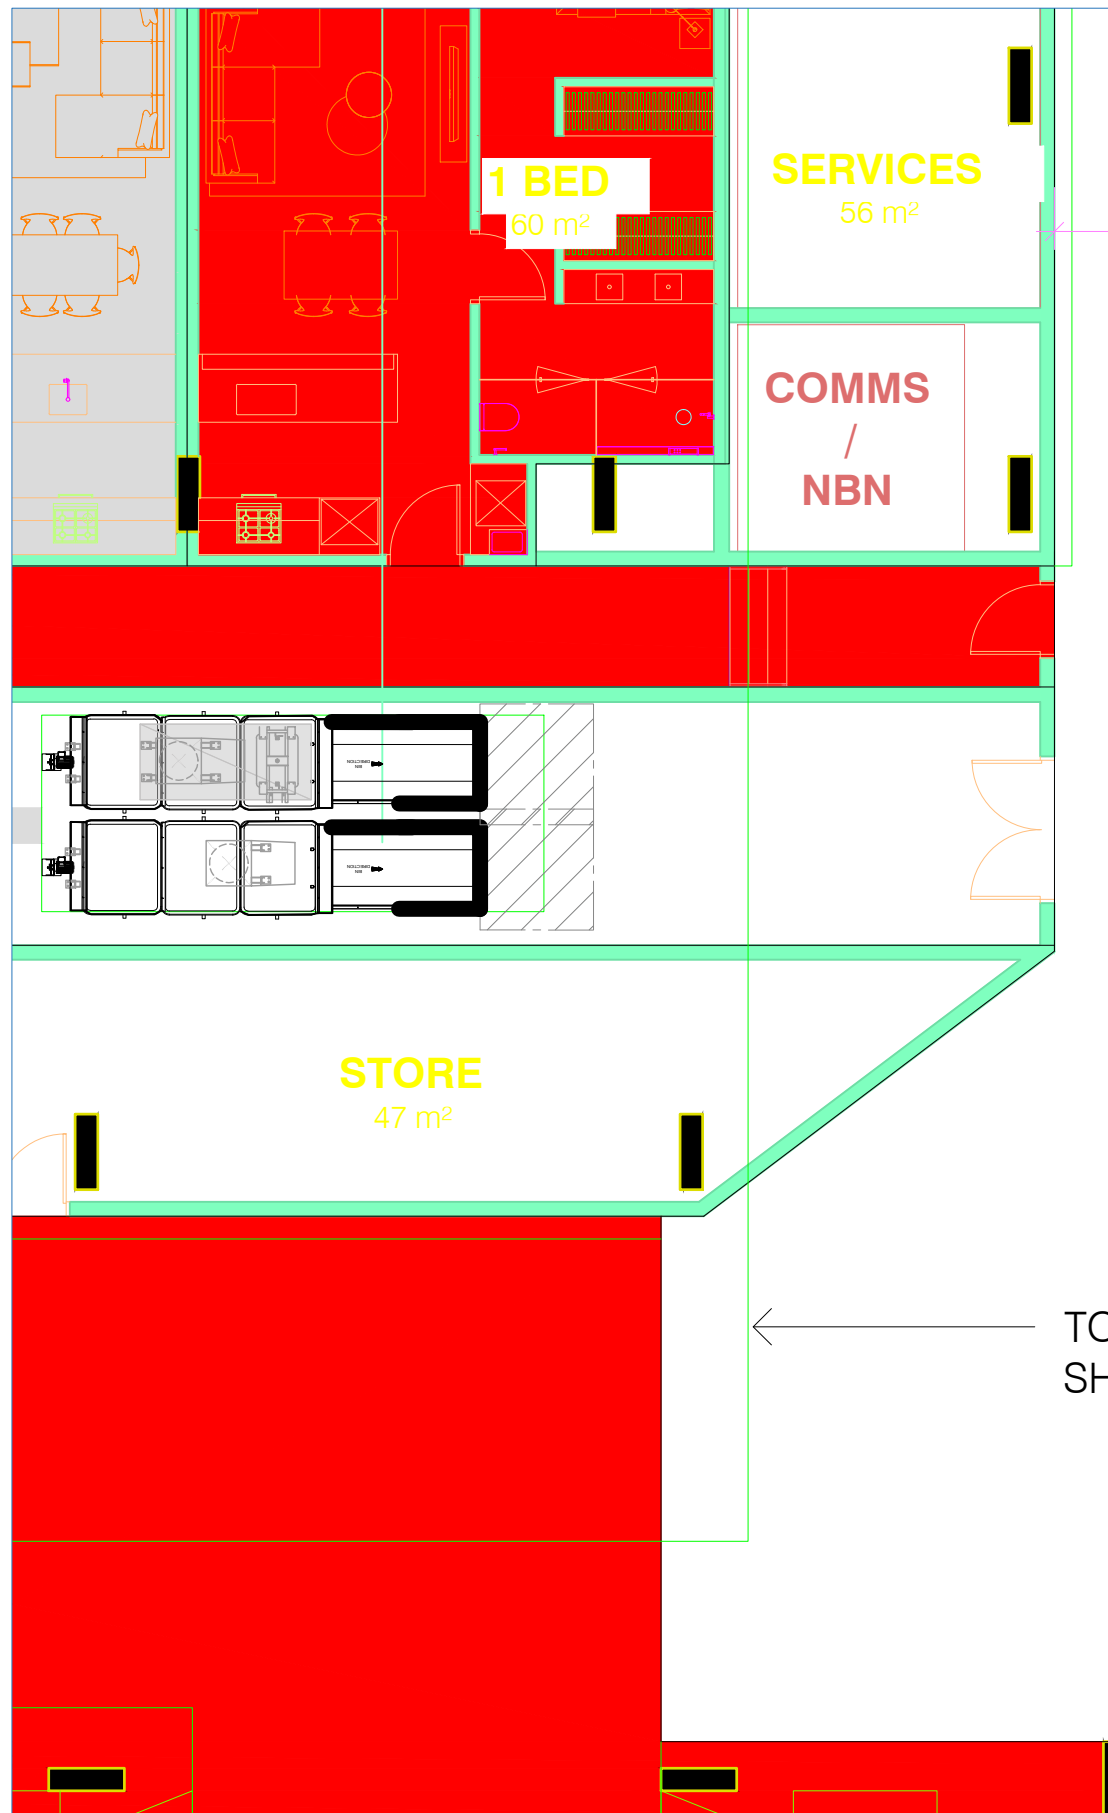

BUILDING 2 - NORTH - CHUTE DISCHARGE ROOM

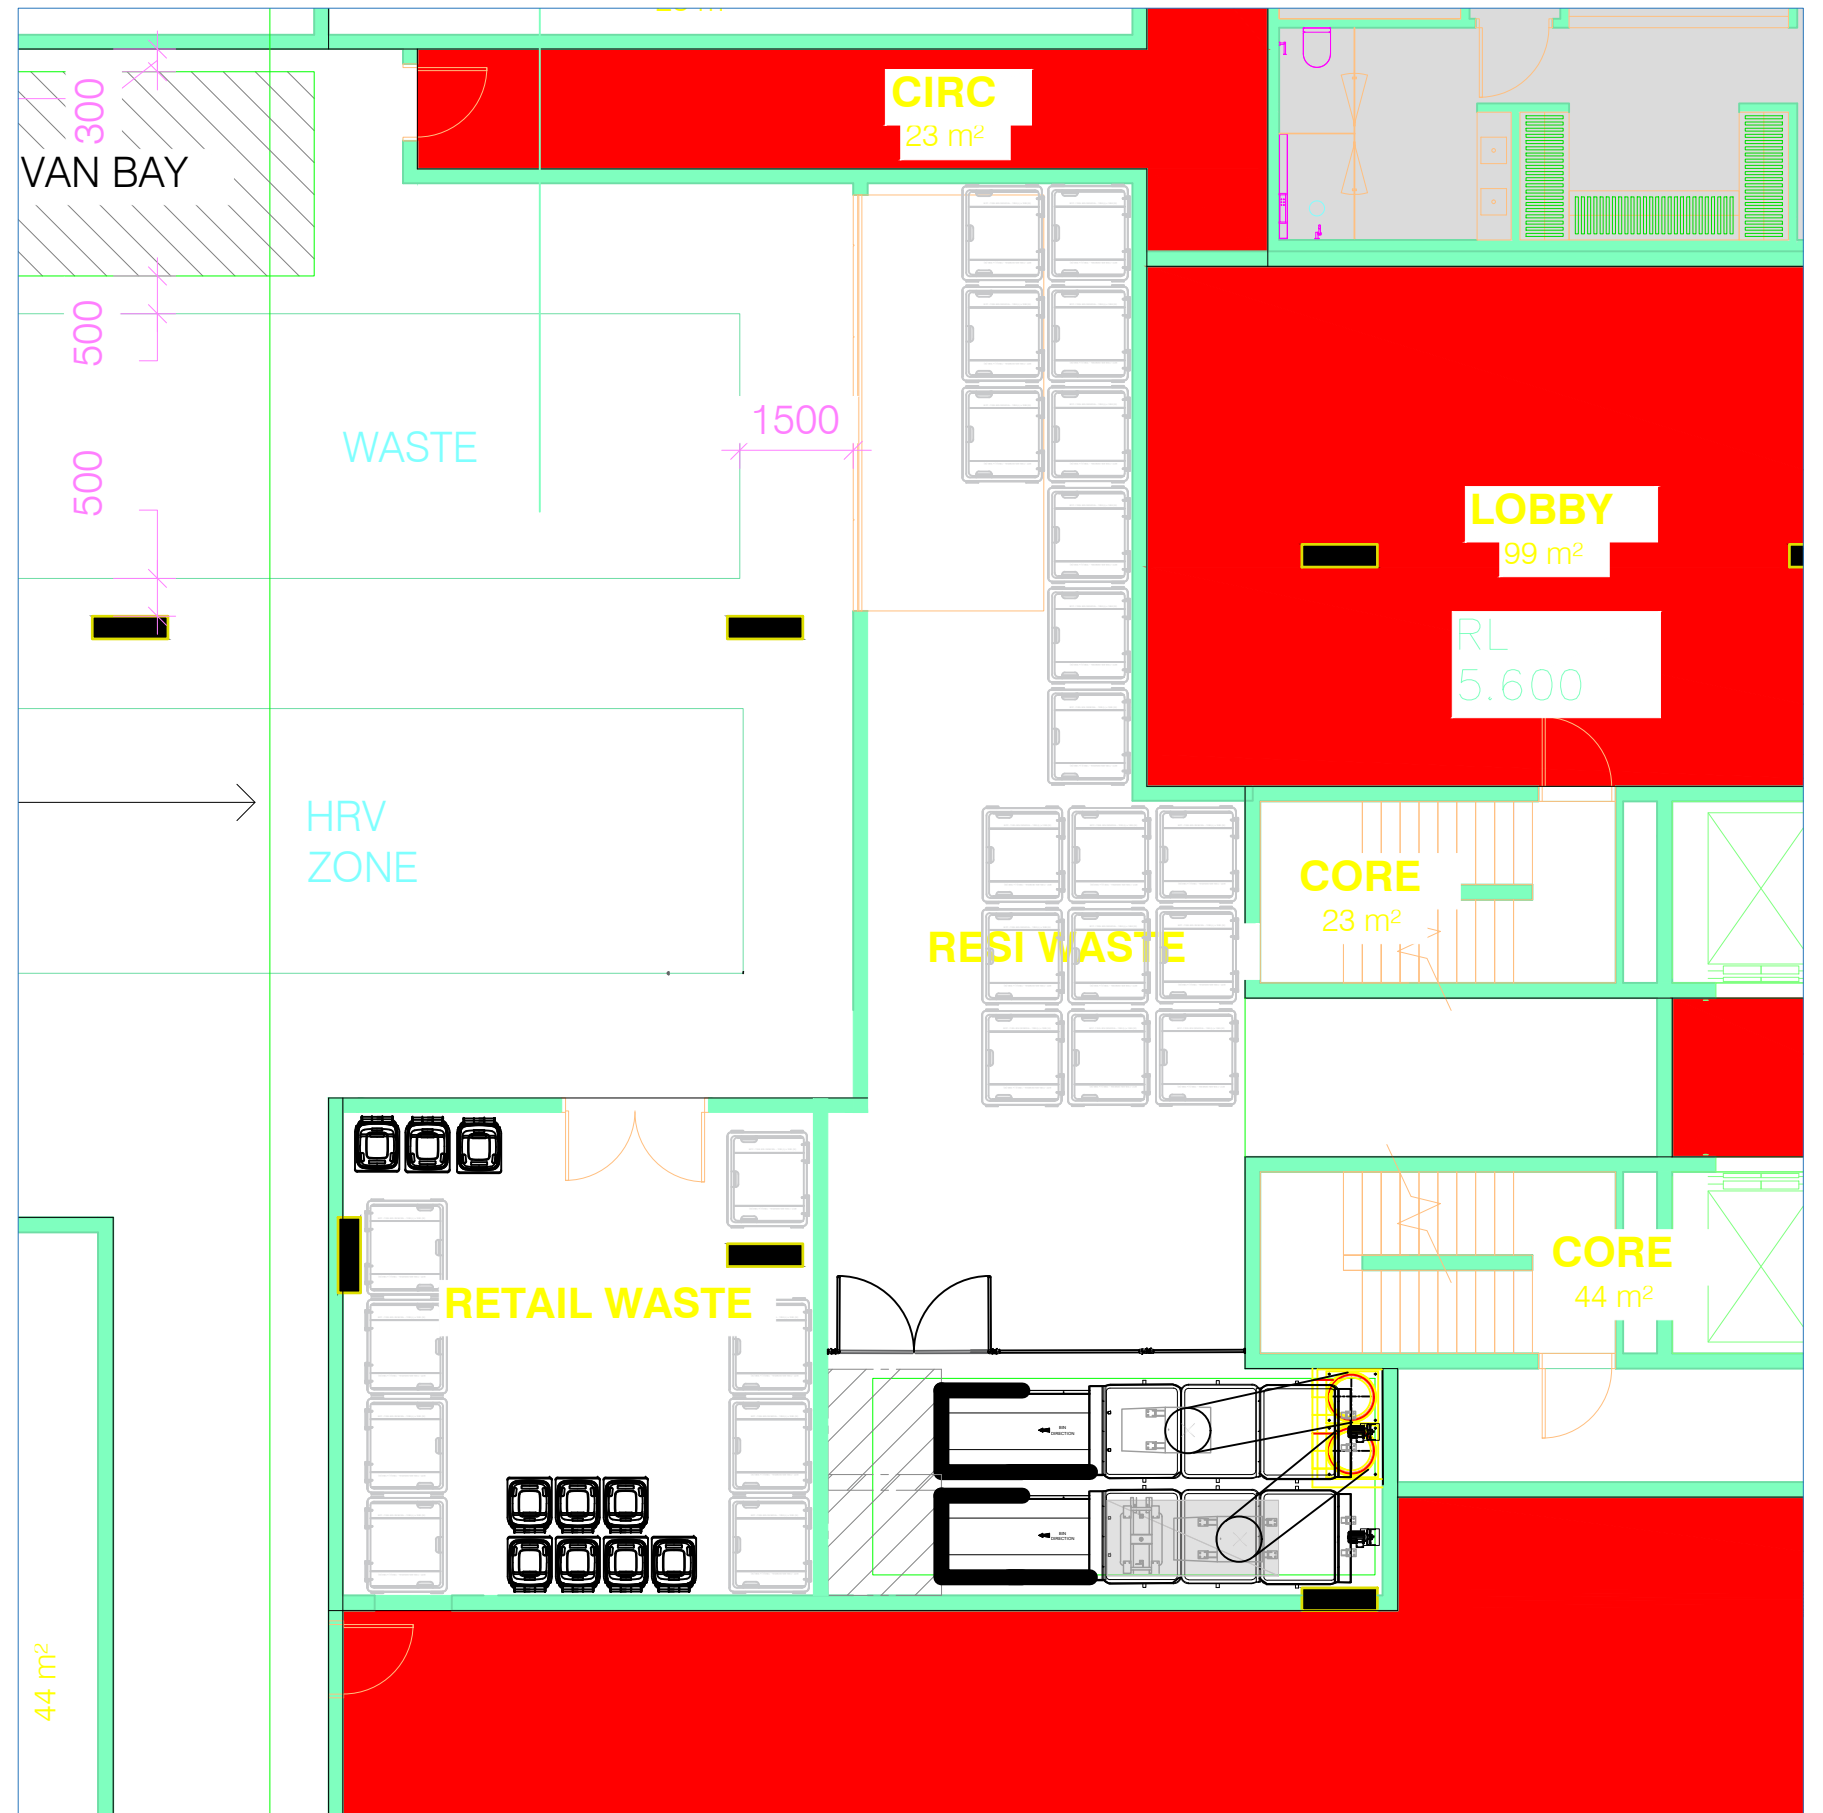

BUILDING 1 - EAST - REFUSE STORAGE AREAS

REV.	DATE	AMENDMENT DESCRIPTION	DRAWN	CHECKED	APPROVED
A	16-12-24	ORIGINAL ISSUE	NI	SK	SK

SCALE  
0 1 2 3 4 5m  
SCALE 1:100 AT ORIGINAL SIZE

NORTH


CLIENT  
**SILVERSTONE DEVELOPMENTS**

**ttm** TTM CONSULTING PTY LTD  
 ABN 65 010 868 621  
 LEVEL 8, 369 Ann Street, BRISBANE QLD 4000  
 P.O. BOX 12015, BRISBANE QLD 4003  
 T: (07) 3327 9500 F: (07) 3327 9501  
 E: ttmbri@ttmgroup.com.au W: www.ttmgroup.com.au


PROJECT  
**LOT 18A, 260 MACARTHUR AVENUE HAMILTON**

DRAWING TITLE  
**REFUSE STORAGE AREA LAYOUTS  
BUILDING 1 AND 2**


PROJECT NUMBER 24BRW0255	ORIGINAL SIZE A3
DRAWING NUMBER 24BRW0255-01	REVISION A
DATE 16 Dec 2024	SHEET 1 OF 1

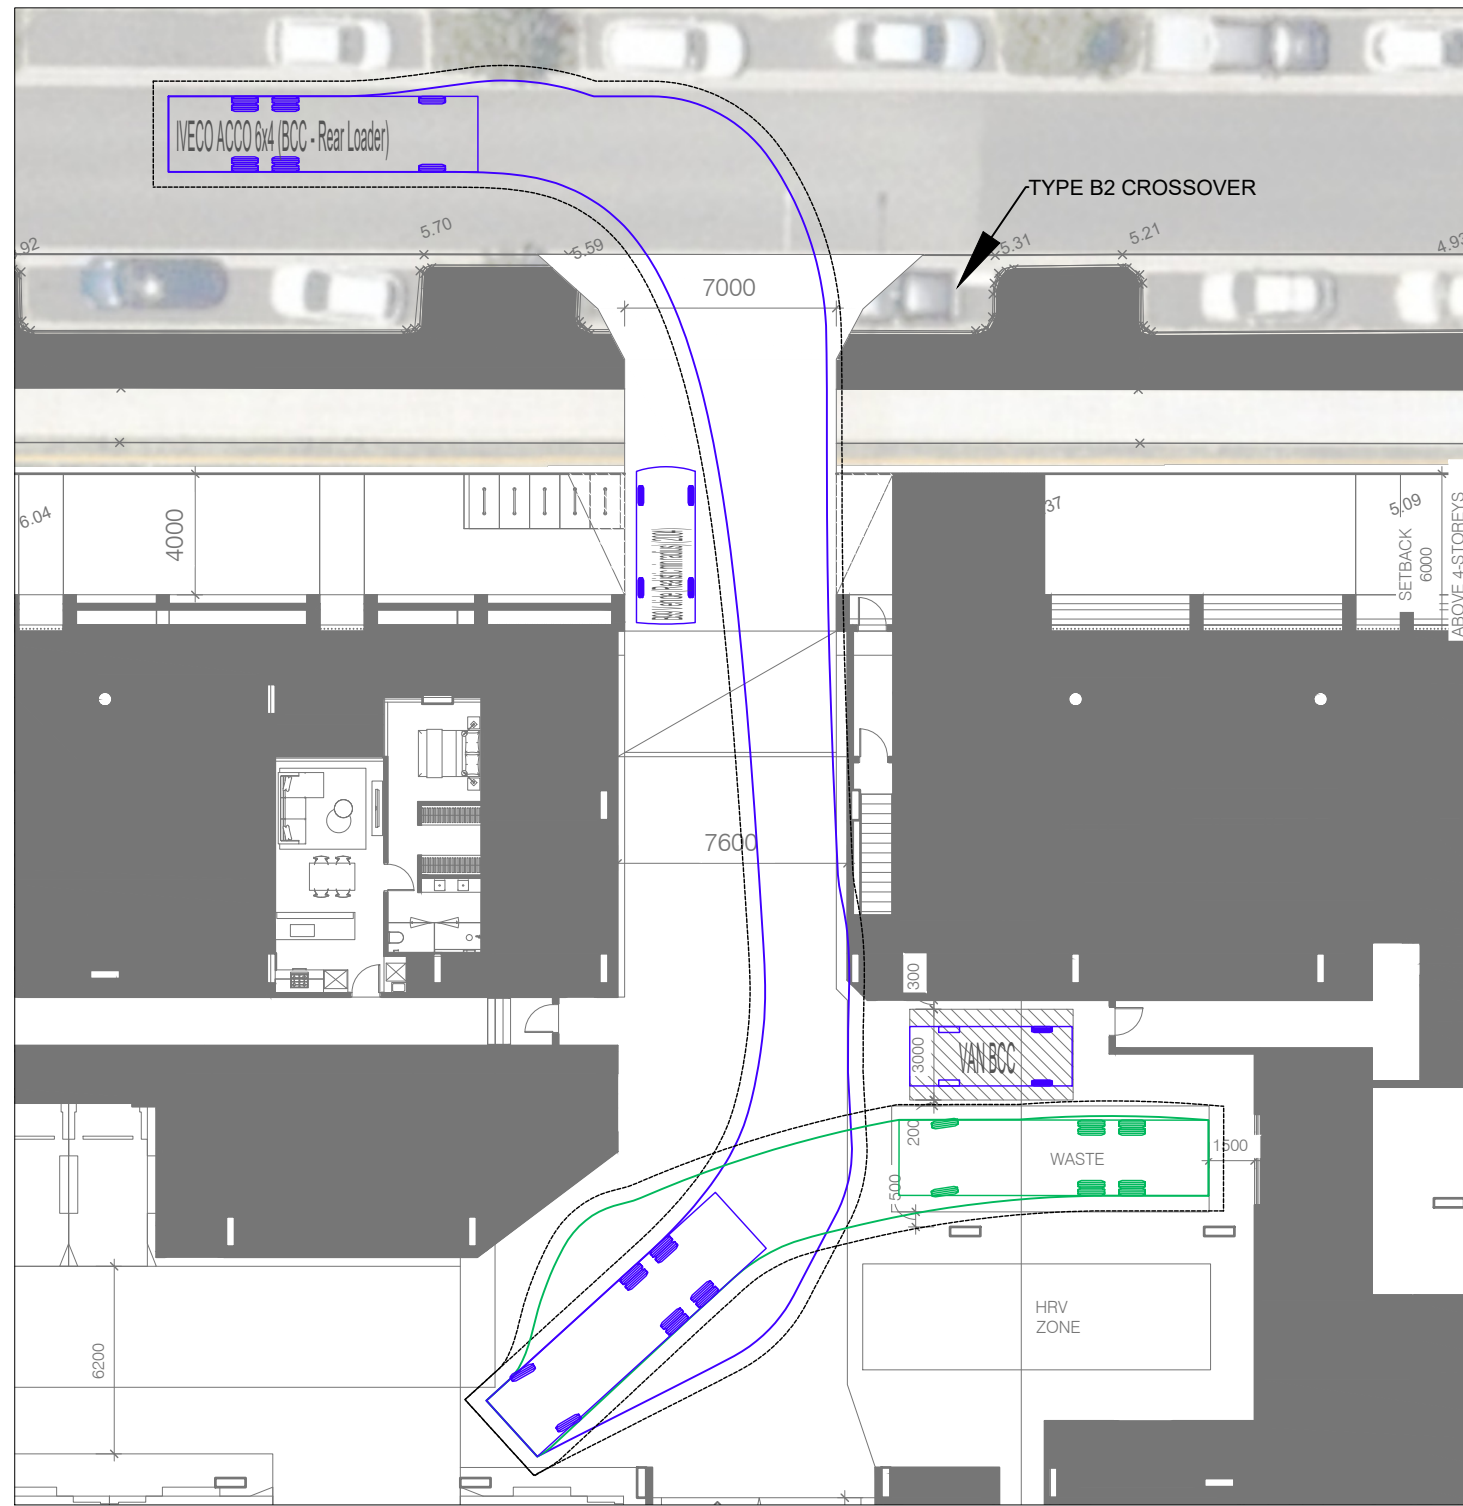


**RCV INGRESS**

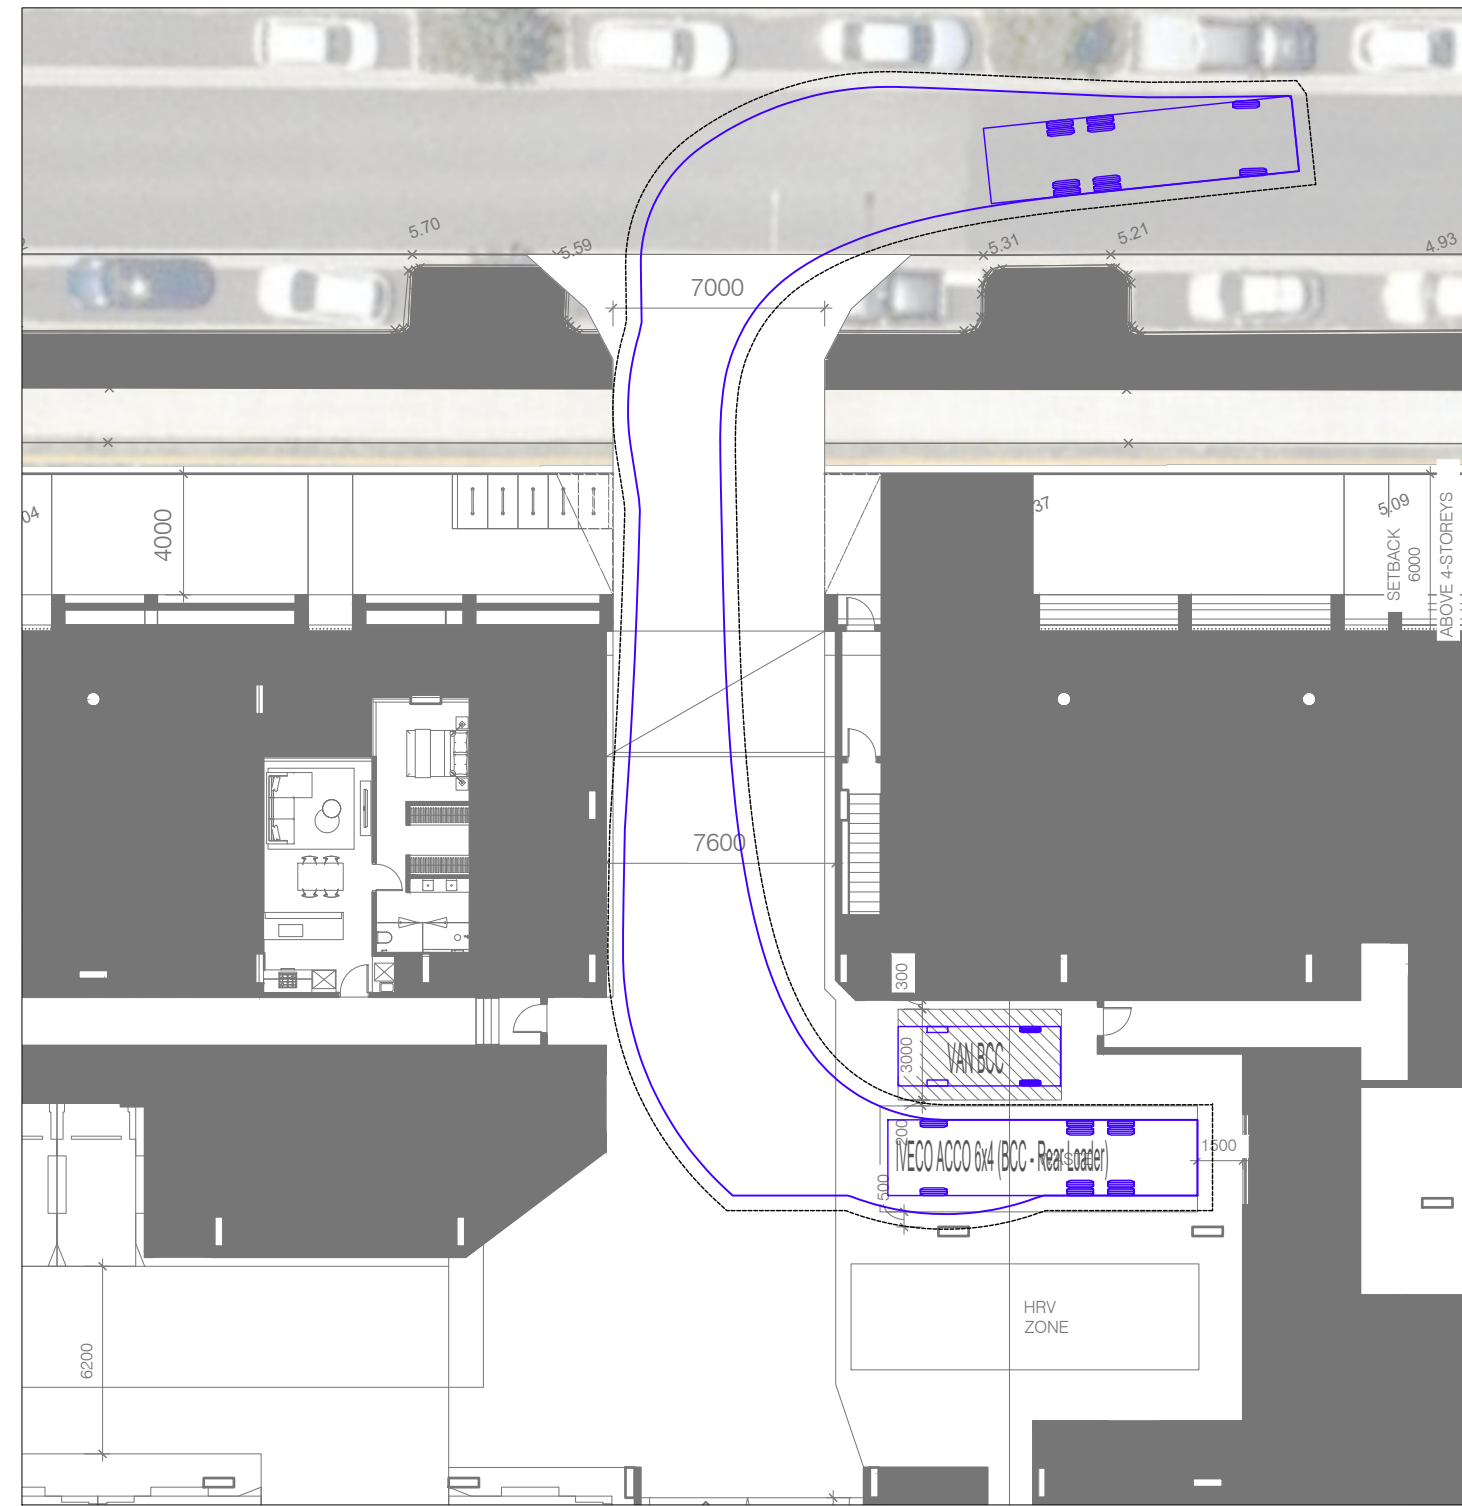

**RCV EGRESS**



**IVECO ACCO 6x4 (BCC - Rear Loader)**  
 Overall Length 10.235m  
 Overall Width 2.500m  
 Overall Body Height 3.600m  
 Min Body Ground Clearance 0.260m  
 Track Width 2.500m  
 Lock-to-lock time 6.00s  
 Curb to Curb Turning Radius 9.757m  
 Design Speed Forward 5.0km/h  
 Clearance Envelope 0.500m




**B99 Vehicle (Realistic min radius) (2004)**  
 Overall Length 5.200m  
 Overall Width 1.940m  
 Overall Body Height 1.878m  
 Min Body Ground Clearance 0.272m  
 Track Width 1.840m  
 Lock-to-lock time 4.00s  
 Curb to Curb Turning Radius 6.250m  
 Design Speed Forward 5.0km/h  
 Clearance Envelope 0.300m

*Simon Crank*  
 DIRECTOR  
 SIMON CRANK RPEQ 18360  
 APPROVED 16 Dec 2024

**PRELIMINARY  
 ADVICE ONLY**  
 16 December 2024

REV.	DATE	AMENDMENT DESCRIPTION	DRAWN	CHECKED	APPROVED
A	16.12.2024	ORIGINAL ISSUE	JH	SC	SC

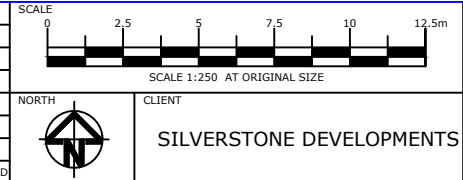

**ttm**  
**Colliers**  
 TTM CONSULTING PTY LTD  
 ABN 65 010 868 621  
 LEVEL 8, 369 Ann Street, BRISBANE QLD 4000  
 P.O. BOX 12015, BRISBANE QLD 4003  
 T: (07) 3327 9500 F: (07) 3327 9501  
 E: ttmbri@ttmgroup.com.au W: www.ttmgroup.com.au

PROJECT  
**LOT 18A, 260 MACARTHUR AVENUE, HAMILTON**  
 DRAWING TITLE  
**SWEPT PATH ANALYSIS  
 - REFUSE COLLECTION VEHICLE (RCV)**

PROJECT NUMBER	ORIGINAL SIZE
24BRT0529	A3
DRAWING NUMBER	REVISION
24BRT0529-02	A
DATE	SHEET
16 Dec 2024	2 OF 2





## C.1 Specified Refuse Management Equipment

The table below provides contextual examples of the specific equipment types specified in this OWMP and is not intended to provide an exhaustive list of all potential options of the required equipment.

Bin / Equipment Types	Waste Streams	Examples	Information
Residential unit bins	General waste and recycling		Various options and sizes. Built and standalone bin available. Examples: <a href="https://www.bunnings.com.au">https://www.bunnings.com.au</a>
Tenancy and Communal area bins	General waste, recycling, food waste, paper / cardboard		Various options and sizes available. To be supplied depending on preference and space available. Examples: <a href="https://www.sourceseparation-systems.com.au-/product/multisort">https://www.sourceseparation-systems.com.au-/product/multisort</a> <a href="https://methodrecycling.com/au/">https://methodrecycling.com/au/</a>
240L bins	General waste, paper, recycling, green waste		Dimensions approx. 740 x 580 x 1080mm (L x W x H) (dimensions may depend on contractor) Examples: <a href="http://www.justwheeliebins.com.au">http://www.justwheeliebins.com.au</a> , <a href="http://wheeliebinonline.com.au">http://wheeliebinonline.com.au</a>
Refuse / Cleaners Trolleys (Optional)	All Streams		Assisted manual transfer of refuse Examples: <a href="https://rubbermaidcommercial.com.au/products/waste-management/mega-brute">https://rubbermaidcommercial.com.au/products/waste-management/mega-brute</a> <a href="https://www.materialshandling.com.au/products/deluxe-compact-cleaning-carts">https://www.materialshandling.com.au/products/deluxe-compact-cleaning-carts</a>
1100L bins	General waste, recycling, paper / cardboard		Dimensions approx. 1070 x 1240 x 1330mm (L x W x H) (dimensions depend on contractor) Examples: <a href="http://www.justwheeliebins.com.au">http://www.justwheeliebins.com.au</a> , <a href="https://www.australianwastemanagement.com.au">https://www.australianwastemanagement.com.au</a>

Bin / Equipment Types	Waste Streams	Examples	Information
Dual Refuse Chute System	General waste, recycling, food waste		<p>Refuse disposal in multi-storey buildings through refuse chutes options include: single chute for waste only, or single chute with diverter system or dual chute for disposal of waste and recycling</p> <p>Examples:  <a href="https://www.wastech.com.au/products/chutes">https://www.wastech.com.au/products/chutes</a>  <a href="https://www.elephantsfoot.com.au/products/chutes">https://www.elephantsfoot.com.au/products/chutes</a></p>
Linear Conveyor	General waste, recycling, food waste		<p>Automated bin rotation (e.g. linear or carousel) to manage bin fill level and prevent overflow under chutes</p> <p>Example:  <a href="https://www.elephantsfoot.com.au/products/compactors/carousel-linear">https://www.elephantsfoot.com.au/products/compactors/carousel-linear</a>  <a href="https://wastech.com.au">https://wastech.com.au</a></p>
Chute Discharge Compaction	General waste		<p>Compactors designed for integration with the refuse chute to minimise the volume of general waste.</p> <p>Examples:  <a href="https://www.elephantsfoot.com.au/products/compactors/carousel-linear">https://www.elephantsfoot.com.au/products/compactors/carousel-linear</a>  <a href="https://wastech.com.au">https://wastech.com.au</a></p>
Organics Household Composting, Worm Farm, Digesters (Optional)	Food waste / organics		<p>Organics / food waste separation, composting and digesting; household-type and commercial grade equipment available.</p> <p>Examples            Ecoguardians Soilfood  <a href="https://www.ecoguardians.com.au/soilfood-soilfood">https://www.ecoguardians.com.au/soilfood-soilfood</a>            Urban Composter  <a href="https://www.urbancomposter.com.au">https://www.urbancomposter.com.au</a>            Worm Farm  <a href="https://wormsdownunder.com.au/products/wormmod">https://wormsdownunder.com.au/products/wormmod</a></p>



Bin / Equipment Types	Waste Streams	Examples	Information
Counter-top E-Waste Recycling (Optional)	Electronic Waste		<p>Prepaid battery collection</p> <p>Example:</p> <p><a href="https://envirostream.com.au/product/prepaid-countertop-battery-recycling-box/">https://envirostream.com.au/product/prepaid-countertop-battery-recycling-box/</a></p> <p><a href="https://www.ecoactiv.com.au/product/4l-battery-recycling-prepaid-service/">https://www.ecoactiv.com.au/product/4l-battery-recycling-prepaid-service/</a></p> <p>Toner cartridge collection</p> <p><a href="https://zerowasteboxes.terracecycle.com.au/products/ink-and-toner-catridges-zero-waste-boxes">https://zerowasteboxes.terracecycle.com.au/products/ink-and-toner-catridges-zero-waste-boxes</a></p>
Bin Weighing Scales (Optional)	All streams		<p>Scales are used to capture all outgoing refuse weights for ongoing analysis of recycling rates.</p> <p>Examples</p> <p><a href="https://www.osat.info/">https://www.osat.info/</a></p> <p><a href="https://gurru.com.au/bintracker/">https://gurru.com.au/bintracker/</a></p>

## Appendix D Refuse Signage

## D.1 Refuse Signage

Waste signage guidelines are provided by the Queensland government:

<https://www.qld.gov.au/environment/pollution/management/waste/recovery/recycling/signage>.

### General Refuse Signage



### Other Refuse Signage




### Colour coding as per AS 4123.7-2006

Mixed (Commingled) Recycling	PMS 108
General waste (landfill)	PMS 032C
Organics	PMS 15-0343
Paper and cardboard recycling	PMS Process Blue C
Soft Plastics	PMS 1655
Used Cooking Oil	Grey

## D.2 Other Refuse, Facility and Safety Signage

Various signage including refuse area, safety and facility signage should be arranged through certified signage providers. Example signs can be found at <http://www.signblitz.com.au>, <https://www.wayout.com.au> or <https://www.smartsign.com>.

### Example Refuse Room Signage

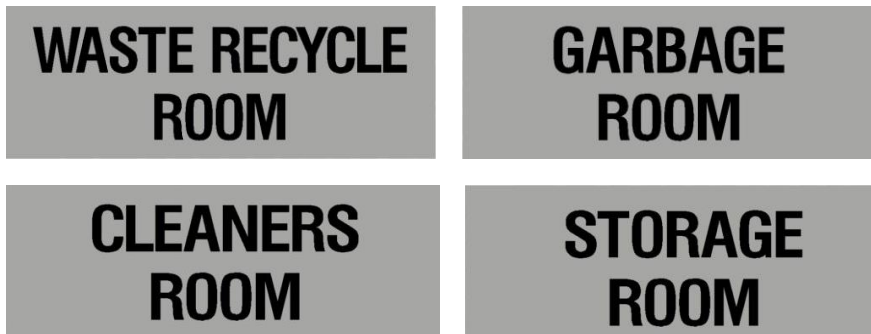

### Example Facility Signage



### Example Safety Signage



## Appendix E Terms and Abbreviations

In this OWMP, a term or abbreviation has the following meaning unless indicated otherwise:

TERM	ABBREVIATION	DEFINITION
<b>Equipment</b>		
Bin (Refuse Bin)		A plastic or steel container for disposal and temporary storage of waste or recycling items. Various types and sizes exist for different items and purposes. Examples include residential unit bins, bulk bins, MGB, steely bins and specialised for medical waste or cigarette butts.
Bin Storage Area		An enclosed area designated for storing on-site refuse bins or a refuse compactor within the property.
Bulk Bin		A galvanized or steel bin receptacle that is greater than 360L in capacity generally ranging from 1.00m <sup>3</sup> to 4.50m <sup>3</sup> used for the storage of refuse that is used for on-site refuse collection.
Bulk Mobile Garbage Bin	Bulk MGB	A plastic (polypropylene) receptacle that is greater than 360L in capacity generally ranging from 660L to 1100L used for the storage of refuse.
Collection Point		An identified position where refuse bins are stored for collection and emptying. The collection point can also be the bin storage area.
Compactor		A receptacle that provides for the mechanical compaction and temporary storage of refuse. It allows to reduce bin numbers and collection frequency.
Composter		A container or machine used for composting specific food scraps and/or organic materials.
Food Waste Recycling System		Defined as a vacuum or pump-based system for shredding, macerating or pulping of food waste. The food waste is transferred through pressure (service) pipes to sealed liquid storage tanks.
Green Waste		All vegetated organic material such as small branches, leaves and grass clippings, tree and shrub pruning, plants and flowers.
Liquid Waste		Non-hazardous liquid waste generated by commercial premises should be connected to sewer or collected for treatment and disposal by a liquid waste contractor (including grease trap waste).
Mobile Garbage Bin	MGB	A plastic (polypropylene) bin or bins used for the temporary storage of refuse that is up to 360L in capacity and may be used in kerbside refuse collection or on-site collection.
Putrescible Waste		Putrescible waste is the component of the waste stream liable to become putrid and usually breaks down in a landfill to create landfill gases and leachate. Typically applies to food, animal and organic products.
Recycling		Recycling contains all material suitable for re-manufacture or re-use, e.g. glass bottles and jars; plastics such as PET, HDPE and PVC; aluminium aerosol and steel cans and lids; milk and juice cartons; soft drink, milk and shampoo containers; paper, cardboard, junk mail, newspapers and magazines.
Refuse		Refuse is material generated and discarded from residential and commercial buildings including general waste, recyclables, green waste and bulky items.
Refuse Storage Room		An area identified for storing on-site MGBs or Bulk Bins within the property.
Refuse Trolley		A cart on wheels that can be used to collect smaller quantities of refuse from different areas or rooms of a building or site, and wheel the collected refuse to a (bulk) bin storage area where it is disposed. Refuse trolleys are commonly used in hotels or offices.
Regulated Waste		Regulated waste is waste prescribed under legislation as regulated waste.

TERM	ABBREVIATION	DEFINITION
Transfer (Manual Transfer)		Manual transfer means physical transfer of refuse material and associated bulk bins or trolleys without assistance.
Waste		Waste is referred to as refuse material with the exclusion of recycling, green waste, hazardous waste, special waste, liquid waste and restricted solid waste.
Waste (General Waste)		General waste is generally referred to as material free of any actual or apparent contamination such as pathological / infectious, radioactive materials and / or hazardous chemical. Reporting use is for material considered to be free of food waste.
Wheelie Bin		A MGB of up to 360L, usually with 2 wheels for easy transfer. A common type is a 240L wheelie bin used for kerbside collection in many residential areas.
<b>Measures</b>		
Cubic Metre	m <sup>3</sup>	Volume in cubic metre(s) related to refuse management equipment.
Ground Floor Area	GFA	The GFA of all storeys of a building is measured from the outside of the external walls or the centre of a common wall. It is commonly measured in square metres.
Kilogram	kg	Kilogram(s) related to refuse weight.
Litre	L	Litre(s) related to refuse volumes.
Square Metre	m <sup>2</sup>	Square metre(s) related to refuse areas.
Ton	T	Ton(s) related to refuse weight.
<b>Collection Vehicles</b>		
Body Truck		A conventional heavy vehicle with a covered loading area. It is generally not specifically designed for emptying the content of bins into the truck during refuse collections, but can be used to carry entire (full) bins for servicing by bin swap-over.
Refuse Collection Vehicle	RCV	A vehicle specifically designed for collecting and emptying refuse bins and refuse compactors.
Rear-End-Loading Refuse Collection Vehicle	REL RCV	A truck specially designed to collect municipal solid waste and recycling, typically 240L wheelie bins to 1100L bulk bins, from rear loading mechanism and haul the collected waste to a solid waste treatment facility.
Tank Truck		An RCV that is specifically designed to collect liquid wastes such as waste cooking oil and food waste pulp. The waste is typically pumped from a waste storage tank into the truck via a hose. Liquid waste management equipment is often provided by the contractor who collects the waste and operates the truck.